



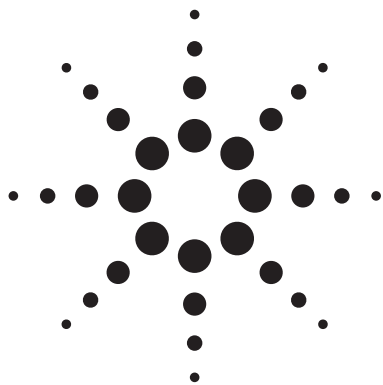

Agilent VTO-0995-T08

Voltage Controlled Oscillator

Data Sheet




Description

The VTO-0995-T08 provides a fundamental, low jitter source as a key component for the data re-timing in the transmitter subsystem and clock and data recovery in the receiver of the 10 Gb fiber optic systems.

The oscillator uses an extremely high performance low noise Agilent Silicon Bipolar transistor in conjunction with a hyper-abrupt varactor diode to provide the tuning capability. The oscillator output is then coupled through a filter to the output.

Functional Block Diagram



Features

- Operating frequency:
9.95328 GHz
- Output power (50 Ω Load):
2 dBm minimum
- Modulation sensitivity:
5 to 10 MHz/V
- Tuning voltage:
0 to 10 Volts
- Low jitter (Less than 50 femto seconds from 50 KHz to 80 MHz)
- Frequency drift over 0°C to +75°C:
20 MHz
- 0.5" D x 0.18" H

Applications

- Transmitter and receiver sub-systems for OC-192/STM-64 applications
- 10 GHz source

VTO-0995-T08 Absolute Maximum Ratings^[1]

Parameter	Units	Ratings
Positive Supply Voltage	V	0 to +10
Tuning Voltage	V	0 to +12
Operating Temperature	°C	-10 to +95
Storage Temperature	°C	-40 to +130

Note:

1. Operation of this device in excess of any of these limits may cause permanent damage.



Agilent Technologies

VT0-0995-T08 Summary Characterization, 0°C to 75°C

Parameter	Units	Min	Typ	Max
Frequency Range	GHz		9.95328	
Vt @ 9.95 GHz	V	0		10
Power Output (50Ω Load)	dBm	2		7
Modulation Sensitivity	MHz/V	5		10
Modulation Sensitivity Variation	%	-20		20
Modulation Bandwidth	MHz	20		
Output Return Loss	dB	12	15	
Second Harmonic (Below Carrier)	dBc			-20
Third Harmonic (Below Carrier)	dBc			-20
Spurious Output (Below Carrier)	dBc			-60
Phase Noise @ 100 KHz from F ₀ (Below Carrier)	dBc/Hz		-106	-103
Frequency Drift over Temperature	MHz			20
Pulling Figure (12 dB Return Loss)	MHz			1
Pushing Figure, ±0.2V Supply	MHz			6
Positive Supply Voltage	V	7.8	8	8.2
Positive Supply Current	mA			100
Tuning Port Input Capacitance	pf		23	
Dimensions	Inches		x 0.5" D x 0.18" H	

Typical Performance Curves @ +25°C

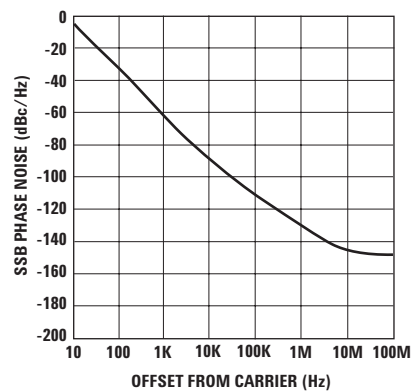


Figure 1. Typical Phase Noise Performance.

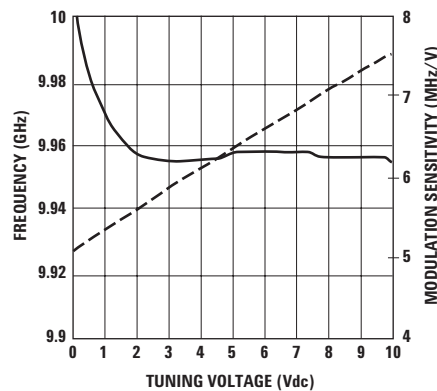


Figure 2. Frequency and Modulation Sensitivity vs. Tuning Voltage.

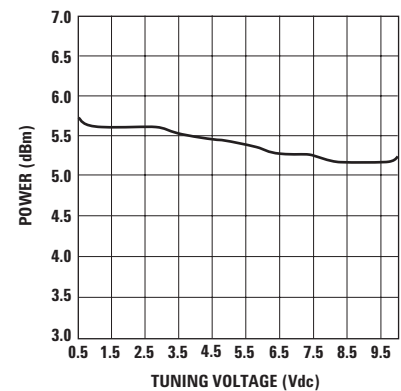



Figure 3. Power Output.

Ordering Information

Part Number

VT0-0995-T08

Package Drawing and Mechanical Dimensions (inches)

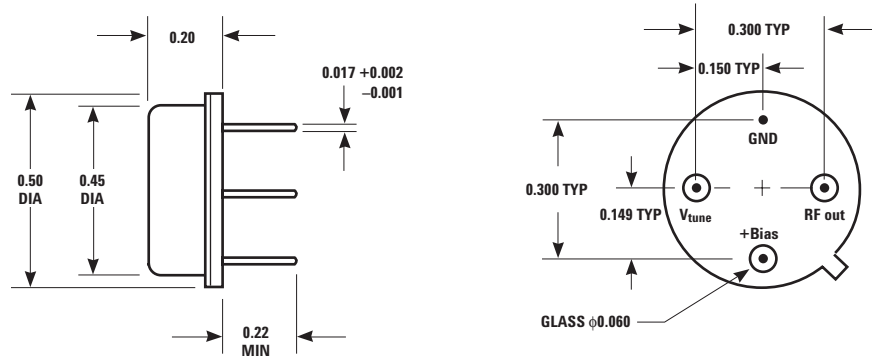

DIMENSIONS ARE SPECIFIED IN INCHES

www.agilent.com/semiconductors

For product information and a complete list of distributors, please go to our web site.

For technical assistance call:

Americas/Canada: +1 (800) 235-0312 or
(408) 654-8675

Europe: +49 (0) 6441 92460

China: 10800 650 0017

Hong Kong: (+65) 6271 2451

India, Australia, New Zealand: (+65) 6271 2394

Japan: (+81 3) 3335-8152(Domestic/International), or
0120-61-1280(Domestic Only)

Korea: (+65) 6271 2194

Malaysia, Singapore: (+65) 6271 2054

Taiwan: (+65) 6271 2654

Data subject to change.

Copyright © 2002 Agilent Technologies, Inc.

Obsoletes 5988-2960EN

July 18, 2002

5988-6660EN



Agilent Technologies