

Digital Delay Unit

SERIES: DDU-222

8 pins SIP
T²L Interfaced

data
delay
devices, inc.



Features:

- Very thin unit.
- TTL input and outputs.
- SIP package.
- Economical.





Specifications:

- **Outputs:** 5, equally spaced.
- **Delay Tolerance:** see table.
- **Rise-time:** 4 NS typ.
- **Minimum pulse width:** 40% of total delay.
- **Temperature range:** 0°C to +70°C.
- **Temperature coefficient:** 100 PPM/°C.
- **Supply voltage:** 4.75 to 5.25 Vdc.
- **Input signal requirement:** TTL logic.
- **Output fan-out:** TTL Schottky load.
- **Power dissipation:** 375 MW max.

Part No.	Total Delay (NS)	Tap Delay (NS)
*DDU-222-4	4 ± 1	1 ± 0.5
*DDU-222-6	6 ± 1	1.5 ± 0.5
*DDU-222-8	8 ± 2	2 ± 1
*DDU-222-10	10 ± 2	2.5 ± 1
*DDU-222-12	12 ± 2	3 ± 1
*DDU-222-16	16 ± 2	4 ± 1.5
*DDU-222-20	20 ± 3	5 ± 2
DDU-222-30	30 ± 3	6 ± 2
DDU-222-35	35 ± 3	7 ± 2
DDU-222-40	40 ± 3	8 ± 2
DDU-222-45	45 ± 3	9 ± 3
DDU-222-50	50 ± 3	10 ± 3
DDU-222-60	60 ± 3	12 ± 3
DDU-222-75	75 ± 4	15 ± 3
DDU-222-100	100 ± 5	20 ± 3
DDU-222-125	125 ± 6.5	25 ± 3
DDU-222-150	150 ± 7.5	30 ± 3
DDU-222-175	175 ± 8	35 ± 4
DDU-222-200	200 ± 10	40 ± 4
DDU-222-250	250 ± 12.5	50 ± 5
DDU-222-300	300 ± 15	60 ± 6
DDU-222-350	350 ± 17	70 ± 7
DDU-222-400	400 ± 20	80 ± 8
DDU-222-450	450 ± 22	90 ± 9
DDU-222-500	500 ± 25	100 ± 10

*Time delay measured with respect to 1st tap.
6 NS ± 1 NS inherent delay.

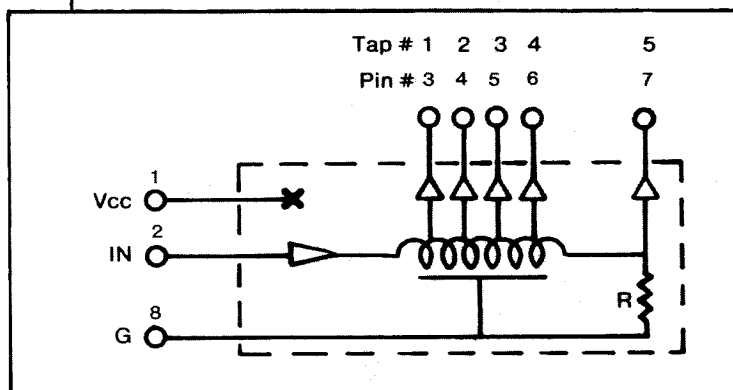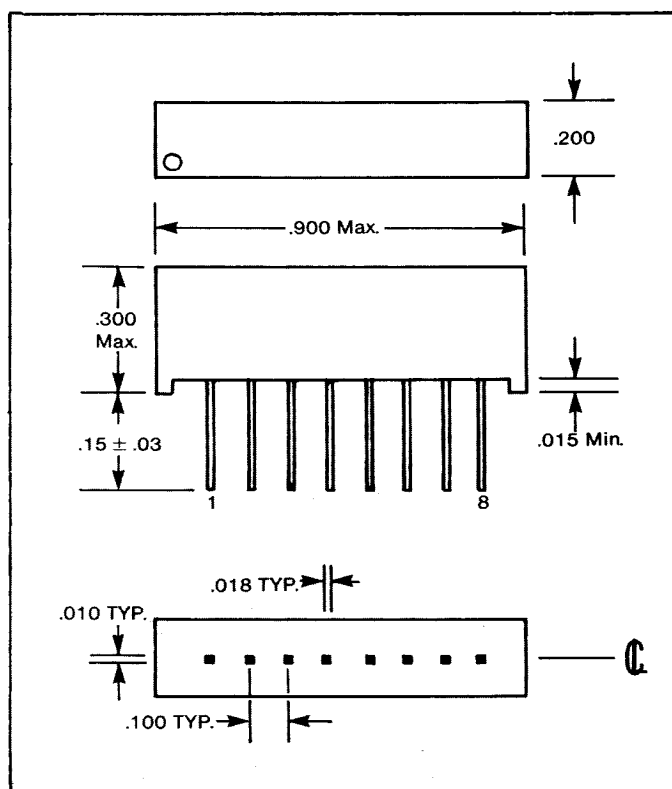

3 Mt. Prospect Avenue, Clifton, New Jersey 07013 ■ (201) 773-2299 ■ FAX (201) 773-9672 ■ TWX 710-989-7008