


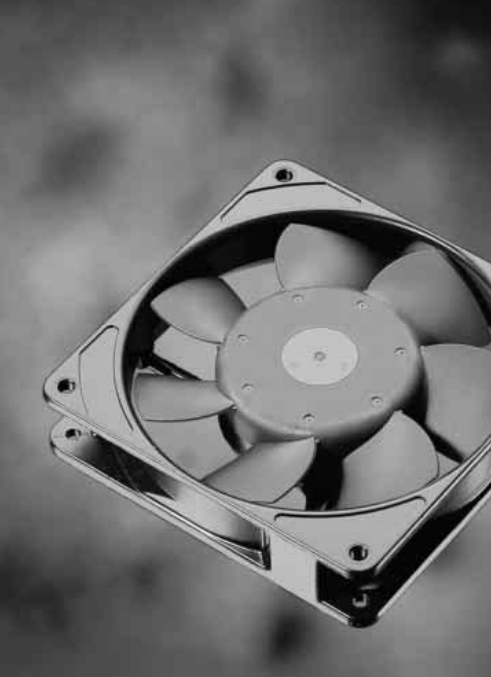

- AC fans with internal rotor shaded-pole motor. Impedance protected against overloading.
- Metal fan housing, impeller of mineral-reinforced plastic PA.
- Air exhaust over struts. Rotational di-

rection CCW looking at rotor.

- Electrical connection via 2 flat pins 2.8 x 0.5 mm.
- Fan housing with ground lug for screw M4.
- Mass 325 g.

SERIES 9900

119x119x25mm

Air flow		Nominal Voltage	Frequency	Noise		Sinter-Sleeve Bearings	Power Input	Nominal Speed	Temperature Range	Service Life L ₁₀ at t _{max}		Curve	Type
m ³ /h	CFM			dB(A)	bels					Hours	Hours		
84	49.4	230	50	29.5	4.4	●	9.5	1850	-40...+80	57 500 / 22 500		1	9956 L
104	61.2	230	50	35.5	4.7	●	10	2250	-40...+80	57 500 / 22 500		2	9956 M
117	68.9	230	50	37	5.0	○	14	2450	-20...+70	47 500 / 22 500		3	9950
117	68.9	230	50	37	5.0	●	14	2450	-40...+70	47 500 / 22 500		3	9956
100	58.9	115	60	34.5	4.6	●	8	2100	-40...+80	62 500 / 25 000		4	9906 L
111	65.3	115	60	37	5.0	●	8	2450	-40...+80	62 500 / 25 000		5	9906 M
135	79.5	115	60	42	5.4	○	12	2850	-20...+70	52 500 / 25 000		6	9900
135	79.5	115	60	42	5.4	●	12	2850	-40...+70	52 500 / 25 000		6	9906

