



### CTA/CTB08

8Amp - 400/600/800/1000V - **TRIAC**

#### Applications

- Phase Control
- Static Switching
- Light Dimming
- Motor Speed Control
- Kitchen Equipment
- Power Tools
- Solenoid Valve Controls:
  - Dishwashers
  - Washing Machines

- > **Suitable for General Purpose AC Switching**
- > **Alternistor/No Snubber Versions for Inductive Loads**
- > **Logic Level Available for use with Microcontrollers and Low Level Devices**
- > **IGT Range 5-50 mA (Q1)**
- > **V<sub>DRM</sub>/V<sub>RMM</sub> 400, 600, 800, 1000V**

#### Absolute Maximum Ratings

|                                                                                                                         | CONDITIONS                                       | SYMBOL                                          | RATING                |
|-------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|-------------------------------------------------|-----------------------|
| RMS On-State Current (full sine wave)                                                                                   | T <sub>c</sub> = 110°C<br>T <sub>c</sub> = 100°C | T0-220AB<br>T0-220AB Iso<br>I <sub>T(RMS)</sub> | 8A                    |
| Non Repetitive Surge Peak On-State Current (Full Cycle, T <sub>j</sub> Initial = 25°C)                                  | F = 50 Hz<br>F = 60 Hz                           | I <sub>TSM</sub>                                | 80A<br>84A            |
| I <sup>2</sup> t Value for fusing                                                                                       | tp = 10 ms                                       | I <sup>2</sup> t                                | 36A <sup>2</sup> s    |
| Critical rate of rise of on-state current<br>I <sub>G</sub> = 2 x I <sub>GT</sub> , tr < 100 ns, T <sub>j</sub> = 125°C |                                                  | di/dt                                           | 100A/μs               |
| Peak Gate Current @ T <sub>j</sub> = 125°C                                                                              | tp = 20 μs                                       | I <sub>GM</sub>                                 | 4A                    |
| Average Gate Power Dissipation @ T <sub>j</sub> = 125°C                                                                 |                                                  | P <sub>G(AV)</sub>                              | 1W                    |
| Storage Temperature Range                                                                                               |                                                  | T <sub>stg</sub>                                | -40 to +150°C         |
| Operating Junction Temperature Range                                                                                    |                                                  | T <sub>j</sub>                                  | -40 to +125°C         |
| Isolation Voltage (CTA Series only)                                                                                     |                                                  | V <sub>ISO</sub>                                | 2500 V <sub>RMS</sub> |

#### Electrical Characteristics

##### ALTERNISTOR/NO SNUBBER AND LOGIC LEVEL (3 Quadrants)


|                                                                                  |                                  | TW      | SW      | CW      | BW       |
|----------------------------------------------------------------------------------|----------------------------------|---------|---------|---------|----------|
| I <sub>GT</sub> MAX @ V <sub>D</sub> = 12 V, R <sub>L</sub> = 30Ω NOTE 1         | QI-II-III                        | 5mA     | 10mA    | 35mA    | 50mA     |
| V <sub>GT</sub> MAX @ V <sub>D</sub> = 12 V, R <sub>L</sub> = 30Ω                | QI-II-III                        | 1.3V    | 1.3V    | 1.3V    | 1.3V     |
| V <sub>GD</sub> MIN @ V <sub>D</sub> = V <sub>DRM</sub> , R <sub>L</sub> = 3.3kΩ | T <sub>j</sub> = 125°C QI-II-III | 0.2V    | 0.2V    | 0.2V    | 0.2V     |
| I <sub>H</sub> MAX @ I <sub>T</sub> = 500 mA NOTE 2                              |                                  | 10mA    | 15mA    | 35mA    | 50mA     |
| I <sub>L</sub> MAX @ I <sub>G</sub> = 1.2 I <sub>GT</sub>                        | QI-III                           | 10mA    | 25mA    | 50mA    | 70mA     |
| I <sub>L</sub> MAX @ I <sub>G</sub> = 1.2 I <sub>GT</sub>                        | Q-II                             | 15mA    | 30mA    | 60mA    | 80mA     |
| dv/dt MIN @ V <sub>D</sub> = 67%V <sub>DRM</sub> (gate open) NOTE 2              | T <sub>j</sub> = 125°C           | 20V/μs  | 40V/μs  | 400V/μs | 1000V/μs |
| (di/dt) <sub>c</sub> MIN @ (dv/dt) <sub>c</sub> = 0.1 V/ms NOTE 2                | T <sub>j</sub> = 125°C           | 3.5A/ms | 5.4A/ms |         |          |
| (di/dt) <sub>c</sub> MIN @ (dv/dt) <sub>c</sub> = 10 V/ms NOTE 2                 | T <sub>j</sub> = 125°C           | 1.5A/ms | 2.8A/ms |         |          |
| (di/dt) <sub>c</sub> MIN without Snubber NOTE 2                                  | T <sub>j</sub> = 125°C           |         |         | 4.5A/ms | 7A/ms    |

##### STANDARD (4 Quadrants)


|                                                                                  |                              | C       | B       |
|----------------------------------------------------------------------------------|------------------------------|---------|---------|
| I <sub>GT</sub> MAX @ V <sub>D</sub> = 12 V, R <sub>L</sub> = 30Ω NOTE 1         | QI-II-III                    | 25mA    | 50mA    |
| I <sub>GT</sub> MAX @ V <sub>D</sub> = 12 V, R <sub>L</sub> = 30Ω NOTE 1         | QIV                          | 50mA    | 100mA   |
| V <sub>GT</sub> MAX @ V <sub>D</sub> = 12 V, R <sub>L</sub> = 30Ω                | Q-AII                        | 1.3V    |         |
| V <sub>GD</sub> MIN @ V <sub>D</sub> = V <sub>DRM</sub> , R <sub>L</sub> = 3.3kΩ | T <sub>j</sub> = 125°C Q-AII | 0.2V    |         |
| I <sub>H</sub> MAX @ I <sub>T</sub> = 500 mA NOTE 2                              |                              | 25mA    | 50mA    |
| I <sub>L</sub> MAX @ I <sub>G</sub> = 1.2 I <sub>GT</sub>                        | QI-III-IV                    | 40mA    | 50mA    |
| I <sub>L</sub> MAX @ I <sub>G</sub> = 1.2 I <sub>GT</sub>                        | Q-II                         | 80mA    | 100mA   |
| dv/dt MIN @ V <sub>D</sub> = 67%V <sub>DRM</sub> (gate open) NOTE 2              | T <sub>j</sub> = 125°C       | 200V/μs | 400V/μs |
| (dv/dt) <sub>c</sub> MIN @ (di/dt) <sub>c</sub> = 3.5 A/ms NOTE 2                | T <sub>j</sub> = 125°C       | 5V/μs   | 10V/μs  |

#### GENERAL NOTES

1. Minimum IGT is guaranteed at 5% of IGT max.
2. For both polarities of A2 referenced to A1
3. All parameters at 25 degrees C unless otherwise specified.



T0-220AB Isolated (CTA08)



T0-220AB Non-Isolated (CTB08)




### Static Characteristics

|                                                      |                     |              |
|------------------------------------------------------|---------------------|--------------|
| $V_T$ MAX @ $I_{TM} = 11$ A, $t_p = 380\mu s$ NOTE 2 | $T_j = 25^\circ C$  | 1.55V        |
| $V_{TO}$ MAX @ Threshold Voltage NOTE 2              | $T_j = 125^\circ C$ | 0.85V        |
| $R_d$ MAX @ Dynamic Resistance NOTE 2                | $T_j = 125^\circ C$ | 50m $\Omega$ |
| $I_{DRM}$ MAX @ $V_{DRM} = V_{RRM}$                  | $T_j = 25^\circ C$  | 5 $\mu$ A    |
| $I_{RRM}$ MAX @ $V_{DRM} = V_{RRM}$                  | $T_j = 125^\circ C$ | 1mA          |

### Thermal Resistances

|                       | SYMBOL        | RATING           |
|-----------------------|---------------|------------------|
| Junction to Case (AC) | $R_{th(j-c)}$ | 1.6 $^\circ C/W$ |
| Junction to Case (AC) | $R_{th(j-c)}$ | 2.5 $^\circ C/W$ |
| Junction to Ambient   | $R_{th(j-a)}$ | 60 $^\circ C/W$  |
| Junction to Ambient   | $R_{th(j-a)}$ | 60 $^\circ C/W$  |

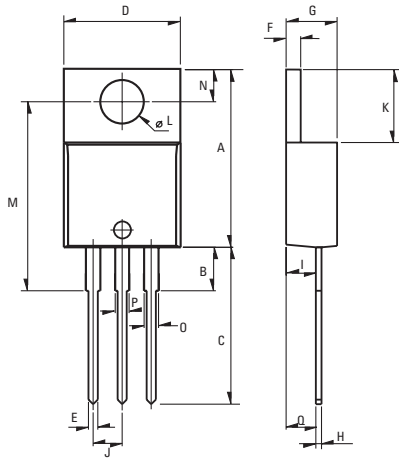

Weight: 2.3g (0.08 oz)

### Dimensions

| REF. | Millimeters |      |       | Inches |       |       |
|------|-------------|------|-------|--------|-------|-------|
|      | Min.        | Typ. | Max.  | Min.   | Typ.  | Max.  |
| A    | 15.24       |      | 15.75 | 0.6    |       | 0.62  |
| B    |             | 3.23 |       |        | 0.127 |       |
| C    | 12.78       |      | 13.79 | 0.503  |       | 0.543 |
| D    | 9.96        |      | 10.36 | 0.392  |       | 0.408 |
| E    | 0.69        |      | 0.94  | 0.027  |       | 0.037 |
| F    | 1.22        |      | 1.32  | 0.048  |       | 0.052 |
| G    | 4.62        |      | 4.83  | 0.182  |       | 0.19  |
| H    | 0.46        |      | 0.61  | 0.018  |       | 0.024 |
| I    | 2.49        |      | 2.84  | 0.098  |       | 0.112 |
| J    | 2.39        |      | 2.69  | 0.094  |       | 0.106 |
| K    | 6.48        |      | 6.88  | 0.255  |       | 0.271 |
| L    | 3.78        |      | 3.89  | 0.149  |       | 0.153 |
| M    | 15.49       | 16   | 16.51 | 0.61   | 0.63  | 0.65  |
| N    | 2.59        |      | 2.9   | 0.102  |       | 0.114 |
| O    | 0.99        |      | 1.55  | 0.039  |       | 0.061 |
| P    | 0.99        |      | 1.55  | 0.039  |       | 0.061 |
| Q    |             | 2.67 |       |        | 0.105 |       |

### Part Number Selection

| Part Number     | Voltage [Vpk]       | $I_{GT}$ [mA] | Type                   | Package  |
|-----------------|---------------------|---------------|------------------------|----------|
| CTA/CTB08-xxxB  | 400, 600, 800, 1000 | 50mA          | Standard               | TO-220AB |
| CTA/CTB08-xxxBW | 400, 600, 800, 1000 | 50mA          | Alternistor/No Snubber | TO-220AB |
| CTA/CTB08-xxxC  | 400, 600, 800, 1000 | 25mA          | Standard               | TO-220AB |
| CTA/CTB08-xxxCW | 400, 600, 800, 1000 | 35mA          | Alternistor/No Snubber | TO-220AB |
| CTA/CTB08-xxxSW | 400, 600, 800, 1000 | 10mA          | Logic Level            | TO-220AB |
| CTA/CTB08-xxxTW | 400, 600, 800       | 5mA           | Logic Level            | TO-220AB |

### Part Number Designation

|               |                                 |                                                              |
|---------------|---------------------------------|--------------------------------------------------------------|
| <b>SERIES</b> | <b>Rated Current</b>            | <b>Type</b>                                                  |
| <b>CT</b>     | <b>08: 8 Amp</b>                | <b>B: Standard (<math>I_{GT}=50</math>mA)</b>                |
| <b>B</b>      |                                 | <b>BW: Alternistor/No Snubber (<math>I_{GT}=50</math>mA)</b> |
| <b>08</b>     |                                 | <b>C: Standard (<math>I_{GT}=25</math>mA)</b>                |
| <b>-</b>      |                                 | <b>CW: Alternistor/No Snubber (<math>I_{GT}=35</math>mA)</b> |
| <b>800</b>    |                                 | <b>SW: Logic Level (<math>I_{GT}=10</math>mA)</b>            |
| <b>CW</b>     |                                 | <b>TW: Logic Level (<math>I_{GT}=5</math>mA)</b>             |
| <b>PT</b>     |                                 |                                                              |
|               | <b>Maximum Blocking Voltage</b> | <b>Packaging</b>                                             |
|               | <b>400: 400Vpk</b>              | <b>Blank: Bulk</b>                                           |
|               | <b>600: 600Vpk</b>              | <b>PT: Plastic Tube</b>                                      |
|               | <b>800: 800Vpk</b>              |                                                              |
|               | <b>1000: 1000Vpk</b>            |                                                              |

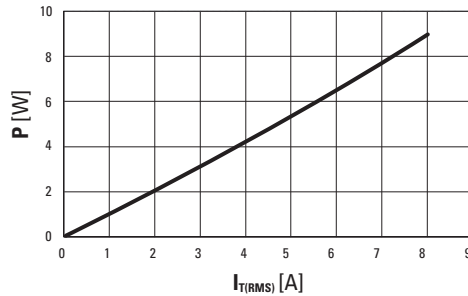


Fig. 1: Power dissipation versus RMS on-state current (full cycle).

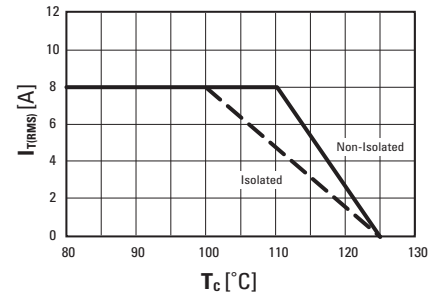


Fig. 2: RMS on-state current versus case temperature (full cycle)

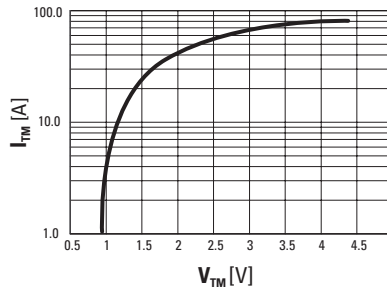


Fig. 3: On-state current versus on-state voltage (instantaneous values)

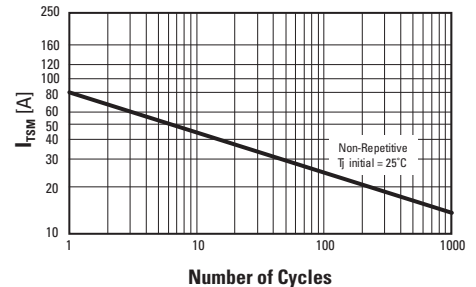


Fig. 4: Non-repetitive surge peak on-state current versus number of cycles.

### ISO9001 Certified

### Approvals

UL Recognized Component - E72445  
(For CTA series)

#### USA

Sales Support (877) 502-5500  
Tech Support (877) 702-7700  
Fax (619) 710-8540  
Email: sales@crydom.com  
Crydom Corp  
2320 Paseo de las Americas, Suite 201  
San Diego, CA 92154

#### EUROPE - UK

Telephone +44 (0) 1202 365070  
Fax +44 (0) 1202 365090  
Email: intsales@crydom.com  
Crydom International Ltd.  
7 Cobham Road  
Ferndown Industrial Estate  
Wimborne, Dorset BH21 7PE

#### Germany

Telephone +49 (0) 180 3000 506

#### ASIA - Thailand

Telephone +66 (0)2 665 2517  
Fax +66 (0)2 665 2588  
Crydom Asia  
18/8 Fico Place 12th Floor  
Soi Sukhumvit 21 (Asoke)  
Klongtoey Nua, Wattana  
Bangkok, Thailand 10110