

Matched GaAs SPST Switch 5 - 3000 MHz

SW-215/216

V2.00

Features

- Low Insertion Loss, 1.0 dB Typical
- Fast Switching Speed, 20 ns Typical
- Ultra Low DC Power Consumption, 0.07mA Typical
- Integral TTL (SW-215) or CMOS (SW-216) Driver

Guaranteed Specifications* (From -55°C to +85°C)

Frequency Range	5-3000 MHz	
Insertion Loss	5-3000 MHz	2.9 dB Min
	5-2000 MHz	1.5 dB Min
	5-1000 MHz	1.2 dB Min
	5-500 MHz	1.1 dB Min
VSWR	5-3000 MHz	2.0:1 Max
	5-2000 MHz	1.9:1 Max
	5-1000 MHz	1.4:1 Max
	5-500 MHz	1.25:1 Max
Isolation	5-3000 MHz	27 dB Min
	5-2000 MHz	45 dB Min
	5-1000 MHz	55 dB Min
	5-500 MHz	60 dB Min

Operating Characteristics

Impedance	50 Ohms Nominal		
Switching Characteristics	SW-215 (TTL)	SW-216 (CMOS)	
	t_{RISE}, t_{FALL} t_{ON}, t_{OFF} (50% CTL to 90/10% RF) Transients (In-Band)	7 ns Typ 20ns Typ 70 mV Typ	20 ns Typ 40 ns Typ 35 mV Typ
Input Power for 1 dB Compression	Model #'s	SW-215	SW-216
	500-4000 MHz 50 MHz	+27 +21	+33 +26
Intermodulation Intercept Pt. (for two-tone input power up to +13 dBm)			
Intercept Points	IP ₂	IP ₃	
	500-4000 MHz 50 MHz	+68 +60	+46 +40
Bias Power			
SW-215	+5 VDC @ 0.07 mA Typ, 1 mA Max		
SW-216	+5 to +8 VDC @ 0.07 to 0.22 mA Typ, 1 mA Max		


Environmental
 MIL-STD-883 screening available.

* All specifications apply when operated with bias voltages of +5 VDC (SW-215) or +8 VDC (SW-216) and 50 ohm impedance at all RF ports.

Ordering Information

Model No.	Package
SW-215 PIN	Dual Inline
SW-216 PIN	Dual Inline

DI-1

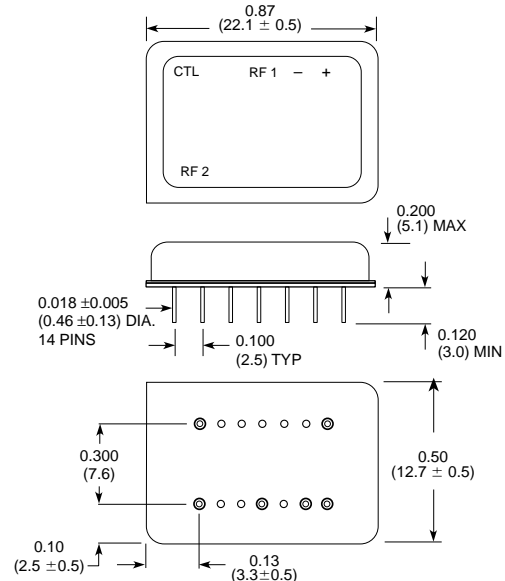

Dimensions in () are in mm.


Unless Otherwise Noted: .xxx = ±0.010 (.xx = ±0.25)
 .xx = ±0.02 (.x = ±0.5)

WEIGHT (APPROX): 0.14 OUNCES 4 GRAMS

Truth Table

Control Input	Condition of Switch
"1" = Logic High TTL (SW-215) CMOS (SW-216)	RF 1 to RF 2
1	ON
0	OFF

Schematic


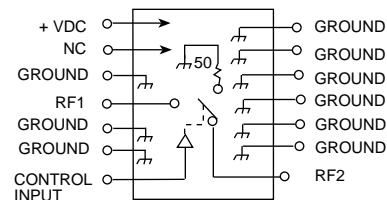


Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266 Fax (800) 618-8883
 Asia/Pacific: Tel. +81 (03) 3226-1671 Fax +81 (03) 3226-1451
 Europe: Tel. +44 (1344) 869 595 Fax +44 (1344) 300 020

Typical Performance

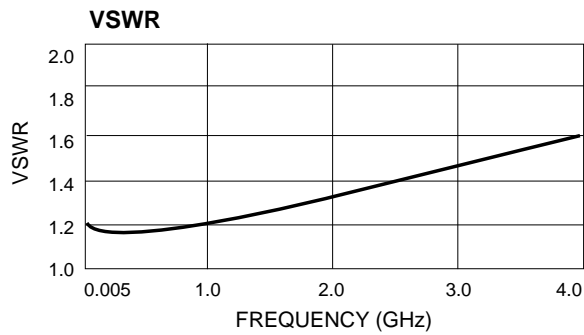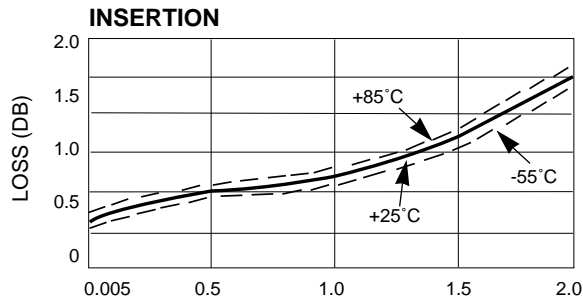

Specifications Subject to Change Without Notice.