




SP1213TC

**Tubular
Wrap and Fill**

**Snubber Capacitors
Metallized Polypropylene**

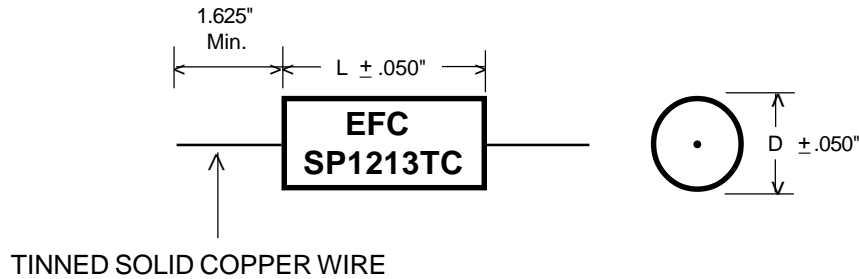

DIMENSIONS and RATINGS

Cap. μF	100 VDC					200 VDC					400 VDC				
	D	L	Lead Dia.	100 kHz ESR (mΩ)	I _{RMS} (Amps)	D	L	Lead Dia.	100 kHz ESR (mΩ)	I _{RMS} (Amps)	D	L	Lead Dia.	100 kHz ESR (mΩ)	I _{RMS} (Amps)
1.0	.580	.781	.032	15	9.0	.520	1.250	.032	20	7.5	.720	1.531	.032	19	9.5
2.0	.630	.906	.032	12	11.0	.700	1.250	.032	15	12.0	.900	1.781	.040	15	15.0
3.0	.750	.906	.040	11	12.0	.750	1.531	.040	13	15.0	1.090	1.781	.040	12	15.0
5.0	.780	1.250	.040	9	14.0	.870	1.781	.040	11	15.0	1.190	2.250	.040	10	15.0
10.0	.940	1.531	.040	8	15.0	1.030	2.250	.040	9	15.0	1.700	2.250	.040	7	15.0
20.0	1.050	2.250	.040	7	15.0	1.450	2.250	.040	6	15.0					
30.0	1.250	2.250	.040	6	15.0										

NOTE:

Maximum ripple current ratings, I_{RMS}, apply at 100 kHz at 25°C.

EFC will manufacture to any non-standard value and size. Please consult factory for special requirements.

Reidville Industrial Park * 41 Interstate Lane
WATERBURY, CONNECTICUT 06705

PHONE (203) 755-5629 FAX (203) 755-0659