

# 2.0mm DUAL ROW TRANSITION

## PLUG I.D.C. TYPE




### 200175MI Serie

Mates With SUYIN 1.0mm Pitch Flat Cable

#### Specifications:

- 8-60Circuits
- Insulator material : Black High Temp . Plastic
- Temp. Range : -40°C to +105°C
- Terminal Material : Pho. bronze
- Plating : Contact-Full Gold Plated
- Max. Current Rating : 1.5A
- Voltage Rating : 150V AC
- Dielectric Strength : 500V (Min. 60 seconds)

2.0  
mm

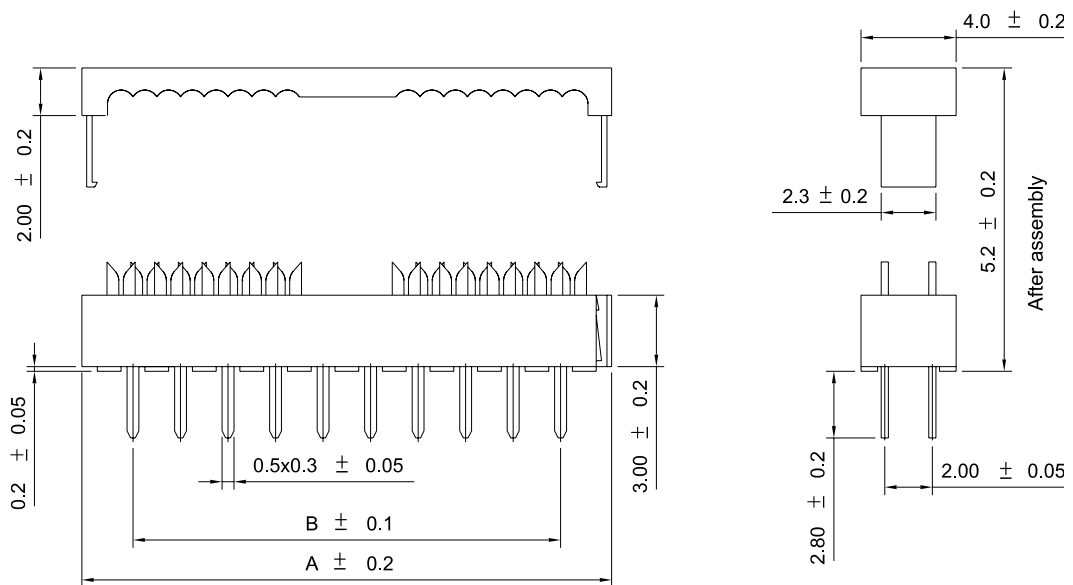


### Order Information

200175MI□□□□□00Z0  
1 2 3 4 5

1. 'I' : IDC Type
2. No. of Pins
3. Plating
4. Color 'Z' : Black
5. Package  
'O' : Slim Box Package Without CAP

Reference Page 11

### Recommended P.C.B Layout

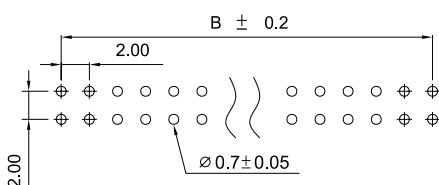

### Dimensional Information

SUYIN P/NO.	DIM.A	DIM.B	SUYIN P/NO.	DIM.A	DIM.B
200175MI008□□□00Z0	12.3	6.0	200175MI036□□□00Z0	40.3	34.0
200175MI010□□□00Z0	14.3	8.0	200175MI038□□□00Z0	42.3	36.0
200175MI012□□□00Z0	16.3	10.0	200175MI040□□□00Z0	44.3	38.0
200175MI014□□□00Z0	18.3	12.0	200175MI042□□□00Z0	46.3	40.0
200175MI016□□□00Z0	20.3	14.0	200175MI044□□□00Z0	48.3	42.0
200175MI018□□□00Z0	22.3	16.0	200175MI046□□□00Z0	50.3	44.0
200175MI020□□□00Z0	24.3	18.0	200175MI048□□□00Z0	52.3	46.0
200175MI022□□□00Z0	26.3	20.0	200175MI050□□□00Z0	54.3	48.0
200175MI024□□□00Z0	28.3	12.0	200175MI052□□□00Z0	56.3	50.0
200175MI026□□□00Z0	30.3	24.0	200175MI054□□□00Z0	58.3	52.0
200175MI028□□□00Z0	32.3	26.0	200175MI056□□□00Z0	60.3	54.0
200175MI030□□□00Z0	34.3	28.0	200175MI058□□□00Z0	62.3	56.0
200175MI032□□□00Z0	36.3	30.0	200175MI060□□□00Z0	64.3	58.0
200175MI034□□□00Z0	38.3	32.0			