General Specifications

Electrical Capacity (Resistive Load)

Power Level (silver): 1A @ 125/250V AC or 1A @ 30V DC
Logic Level (gold): 0.4VA maximum @ 28V AC/DC maximum (Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)
Note: Find additional explanation of operating range in Supplement section.

Other Ratings

Contact Resistance: 50 milliohms maximum
Insulation Resistance: 1,000 megohms minimum @ 500V DC
Dielectric Strength: For Silver: 1,000V AC minimum between contacts for 1 minute minimum & 1,500V AC minimum between contacts & case for 1 minute minimum;
For Gold: 750V AC minimum between contacts for 1 minute minimum & 1,500V AC minimum between contacts & case for 1 minute minimum
Mechanical Life: 100,000 operations minimum
Electrical Life: 50,000 operations minimum for silver; 100,000 operations minimum for gold
Nominal Operating Force: Single pole 0.98 ~ 2.45N for maintained & 0.98 ~ 1.96N for momentary;
Double pole 1.47 ~ 3.43N for maintained & 1.47 ~ 2.94N for momentary
Contact Timing: Nonshorting (break-before-make)
Travel: Pretravel .087" (2.2mm); Overtravel .031" (0.8mm); Total Travel .118" (3.0mm)

Materials & Finishes

Housing: Polyamide (UL94V-0)
Movable Contactor: Silver for power circuit; copper with gold plating for logic level circuit
Stationary Contacts: Silver for power circuit; copper with gold plating for logic level circuit
Housing Base: Polyamide (UL94V-0)
Terminal Base: Polyester
Common Terminals: Phosphor bronze with silver flash plating for power circuit;
Phosphor bronze with gold flash plating for logic level circuit
End Terminals: Brass with silver flash plating for power circuit;
Brass with gold flash plating for logic level circuit
Lamp Terminals: Phosphor bronze with nickel flash plating

Environmental Data

Operating Temperature Range: –25°C through +50°C (–13°F through +122°F) for Illuminated
–25°C through +70°C (–13°F through +158°F) for Nonilluminated
Humidity: 90 ~ 95% humidity for 96 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s^2) acceleration (tested in 6 right angled directions, with 3 shocks in each direction)

Installation

Mounting Torque: 0.78Nm (6.9 lb•in) maximum
Cap Installation Force: 4.51N (1.0 lbf) maximum downward force on cap
Soldering Time & Temperature: Manual Soldering: See Profile A in Supplement section.

Standards & Certifications

Flammability Standards: UL94V-0 housing & housing base
UL: File No. E44145
Single & double pole models recognized at 1A @ 125/250V AC, 1A @ 30V DC, & 0.4VA @ 28V DC.
Add "/U" to end of part number to order UL mark on switch.
Add "/CUL" to end of part number to order cULus mark on switch.
CSA: File No. 023535_0_000
Single & double pole models recognized at 1A @ 125/250V AC, 1A @ 30V DC, & 0.4VA @ 28V DC.
Add "/C" to end of part number to order CSA mark on switch.

Distinctive Characteristics

Bright illumination with numerous color variations. Spot illumination available. Square, rectangular, and round shaped caps.

Front panel relamping.

Choice of bright or super bright LEDs in red, amber, green, white, and blue.

Latchdown feature gives indication of circuit status. Audible and tactile feedback with smooth and responsive operation.

Snap-action mechanism for long life.

Stainless steel frame on snap-in models has a specially designed projection, which prevents rotation and correctly orients switch in panel.

12mm body diameter.

Molded-in terminals lock out flux, dust, and other contaminants.

8mm panel thickness capability. Rear panel bushing or snap-in mounting.

Optional PCB adaptors in straight and right angle types.

Matching indicators available.

Actual Size

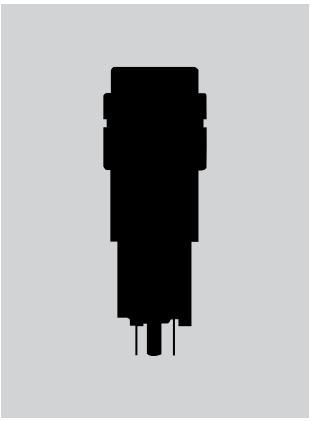

TYPICAL SWITCH ORDERING EXAMPLE

KB | 1 | 5 | C | K | W01 | ☐ — 12 — FF

Poles

1	SPDT
2	DPDT

Circuits

5	ON	(ON)
( ) = Momentary		
6	ON	ON
Alternate Action with Latchdown		

Shapes

Bushing Mounting	
S	Square
C	Round
R	Rectangular
Snap-in Mounting	
K	Square
M	Round
N	Rectangular

Housing

K	Black only

Contacts & Terminals

W01	Silver Contacts and Solder Lug Terminals* 1A @ 125/250V AC
G01	Gold Contacts and Solder Lug Terminals* 0.4VA @ 28V AC/DC

Barrier Type

No Code	No Barrier
B	With Barrier

Lamps

Incandescent Lamp Used with Solid Cap

05	5-volt
12	12-volt
No Code	Nonilluminated

Incandescent or Neon Used with Insert Cap

05	5-volt
12	12-volt
01	110-volt Neon
No Code	Nonilluminated

Bright LED Used with Cap for LED

Colors		Resistor	
5C	Red	No Code	No Resistor
5D	Amber	05	5-volt
5F	Green	12	12-volt
		24	24-volt

Super Bright LED Used with Cap for LED

6B	White
6F	Green
6G	Blue

Cap Types & Colors

Solid Cap: Lens/Filter Colors

A	Black/None (Nonilluminated Only. Available in Square and Round Only.)		
BB	White/White	FB	Green/White
CB	Red/White	FF	Green/Green
CC	Red/Red	GB	Blue/White
EB	Yellow/White	GG	Blue/Blue

Insert Cap: Lens/Filter Colors

JB	Clear/White
JC	Clear/Red
JE	Clear/Yellow
* JF	Clear/Green
*JG	Clear/Blue

* JF & JG not suitable with neon.

LED Cap: Lens/Diffuser Colors

AB	Square Spot Illuminated Black Cap/White Window
JB	Clear/White
JC	Clear/Red
JD	Clear/Amber
JF	Clear/Green

LED Cap: Lens/Diffuser Colors

JB	Clear/White

IMPORTANT:

Switches are supplied without UL, cULus, & CSA markings unless specified. Specific models & ratings noted on General Specifications page.

* Wire harness & cable assemblies offered only in Americas

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

KB15CKW01-12-FF

CONTACT MATERIALS, RATINGS & TERMINALS

W **Silver Contacts**

Power Level
1A @ 125V AC & 250V AC

G **Gold Contacts**

Logic Level
0.4VA maximum @ 28V AC/DC

Complete explanation of operating range in Supplement section.

01 **Solder Lug**



AT055 Crossover Guard

A partitioned plastic guard is supplied with each switch to provide insulation between terminals.

Installation steps:

1. Identify wire-to-terminal connections.
2. Thread wires through the guard.
3. Solder the connections.
4. Push the guard fully onto the switch body.



BARRIER TYPE

No Code **No Barrier**
Built-in bezel

B **With Barrier**
Built-in barrier only available for Square and Rectangular

LAMP COLORS & SPECIFICATIONS

The electrical specifications shown are determined at a basic temperature of 25°C.
LED circuit is isolated and requires external power source. Polarity marks are on the bottom of the switch.
If the source voltage exceeds the rated voltage, a ballast resistor is required.
The resistor value can be calculated by using the formula in the Supplement section.
Ambient Temperature Range for lamps below: −25°C ~ +50°C.

Incandescent & Neon Lamps

AT611 Incandescent
AT615 Neon

T-1 Bi-pin

		05	**12**	**01**
Voltage	V	5V AC	12V AC	110V AC
Current	I	115mA	60mA	1.5mA
Endurance	Hours	7,000 average		10,000

Recommended Resistors for Neon:
33K ohms for 110V AC;
100K ohms for 220V AC

No Code **No Lamp**

Bright LED with Resistor

AT634

LEDs are colored in OFF state.

T-1¼ Bi-pin

Color Codes:	Red **5C**	Amber **5D**	Green **5F**	Resistor Codes **05**	**12**	**24**
Forward Peak Current			I_{FM}	—	—	—
Continuous Forward Current			I_F	25mA	20mA	10mA
Forward Voltage			V_F	5V	12V	24V
Reverse Peak Voltage			V_{RM}	4V	8V	16V
Current Reduction Rate Above 25°C			ΔI_F	—	—	—

AT634
5-volt
2-element
with 1 Resistor



AT634
12-volt
4-element
with 2 Resistors



AT634
24-volt
4-element
with 2 Resistors



LAMP COLORS & SPECIFICATIONS

Bright LED without Resistor

AT635

LEDs are colored in OFF state.

T-1½ Bi-pin

Color Codes		Red 5C	Amber 5D	Green 5F	No Code: No Resistor
					Red / Amber / Green
Forward Peak Current	I_{FM}	30mA	30mA	30mA	
Continuous Forward Current	I_F	20mA	20mA	20mA	
Forward Voltage	V_F	1.9V	2.0V	2.1V	
Reverse Peak Voltage	V_{RM}	5V	5V	5V	
Current Reduction Rate Above 25°C	ΔI_F	0.42mA/°C			
Ambient Temperature Range		−25° ~ +50°C			

Super Bright Single Element LED

AT625G Blue

AT631B White

AT632F Green

T-1 Bi-pin

ATTENTION ELECTROSTATIC SENSITIVE DEVICES

Color		6B White	6F Green	6G Blue
Forward Peak Current	I_{FM}	30mA	30mA	30mA
Continuous Forward Current	I_F	20mA	20mA	20mA
Forward Voltage	V_F	3.6V	3.5V	3.6V
Reverse Peak Voltage	V_{RM}	5V	5V	5V
Current Reduction Rate Above 25°C	ΔI_F	0.50mA/°C	0.50mA/°C	0.50mA/°C
Ambient Temperature Range		−25° ~ +50°C		

CAP TYPES & COLOR COMBINATIONS

Color Codes: **A** Black **B** White **C** Red **E** Yellow **F** Green **G** Blue **J** Clear

Solid Cap for Incandescent Lamp & Nonilluminated

Lens/Filter Colors Available:

A Nonilluminated Only; Square & Round Only

BB **FB** **CB** **FF** **CC** **GB** **EB** **GG**

AT485 Square



AT486 Round



AT4021 Rectangular



Material: Polycarbonate Finish: Glossy



Translucent Colored Lens

Translucent Colored Filter

Lamp AT611

Insert Cap for Incandescent or Neon Lamp & Nonilluminated

Lens/Filter Colors Available:

JB **JF** **JC** **JG** **JE**

JF and JG not suitable with neon lamp.

AT487 Square



AT488 Round



AT4022 Rectangular



Material: Polycarbonate Finish: Glossy

Transparent Clear Lens

Translucent Colored Filter

Lamp AT611

Lamp AT615

CAP TYPES & COLOR COMBINATIONS

Color Codes: **A** Black **B** White **C** Red **D** Amber **E** Yellow **F** Green **G** Blue **J** Clear

Spot Illuminated Cap for Bright LED without Resistor or with Resistor

Cap/Window Colors Available:

AB **Opaque Black Cap with Translucent White Window for Spot Illumination**

AT4051
Square





Material: Polycarbonate Finish: Matte

Bright LED AT635 | Bright LED AT634

Cap for Bright LED without Resistor or LED with Resistor

Lens/Diffuser Colors Available: (AT4133, 4132, 4134 white diffusers; AT4158, 4160, 4159 colored diffusers)

JB **AT4133** **Square**

AT4132 **Round**

AT4134 **Rectangular**



Transparent Clear Lens

JC **AT4158**

AT4160

AT4159

JD

JF







Translucent Diffuser

Material: Polycarbonate Finish: Glossy

Bright LED AT635 | Bright LED AT634

Cap for Super Bright LED

Lens/Diffuser Colors Available:

JB **AT4133** **Square**

AT4132 **Round**

AT4134 **Rectangular**



Translucent Clear Lens







Translucent White Diffuser

Material: Polycarbonate Finish: Glossy

Super Bright LEDs
AT625
AT631 AT632

TYPICAL SWITCH DIMENSIONS

Square • Bushing Mount — Single & Double Pole



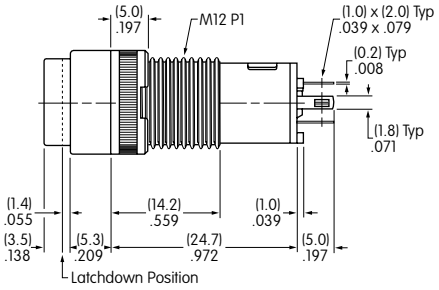



KB15SKW01-05-GG

Single pole models do not have terminals 4, 5, & 6.

Round • Bushing Mount — Single & Double Pole



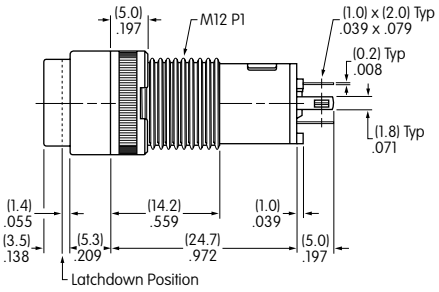



KB25CKW01-05-GG

Single pole models do not have terminals 4, 5, & 6.

Rectangular • Bushing Mount — Single & Double Pole



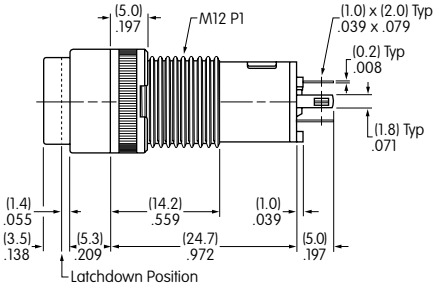



KB15RKW01-05-GG

Single pole models do not have terminals 4, 5, & 6.

TYPICAL SWITCH DIMENSIONS

Single & Double Pole — Square • Snap-in Mount

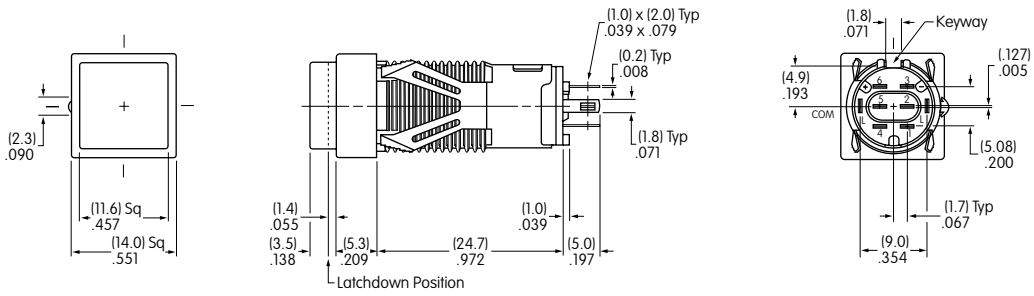

Single pole models do not have terminals 4, 5, & 6. **KB16KKW01-05-CB**

Single & Double Pole — Round • Snap-in Mount

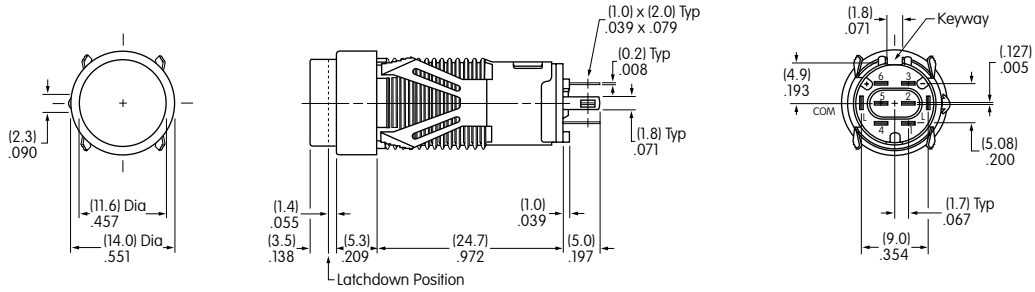

Single pole models do not have terminals 4, 5, & 6. **KB26MKW01-05-CB**

Single & Double Pole — Rectangular • Snap-in Mount

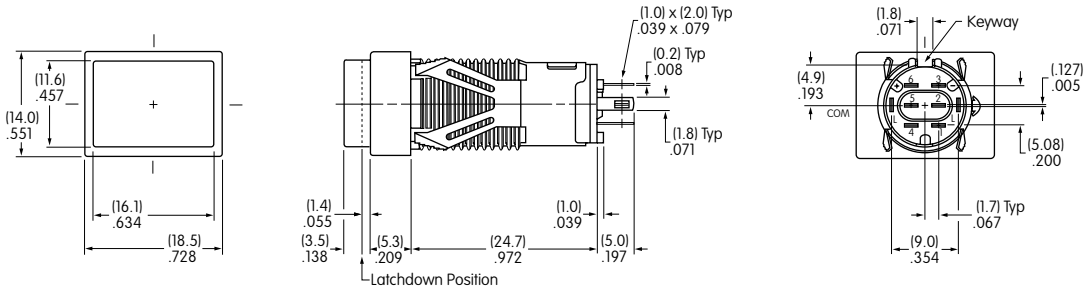

Single pole models do not have terminals 4, 5, & 6. **KB16NKW01-05-CB**

TYPICAL SWITCH DIMENSIONS

Square • Barrier • Bushing Mount — Single & Double Pole



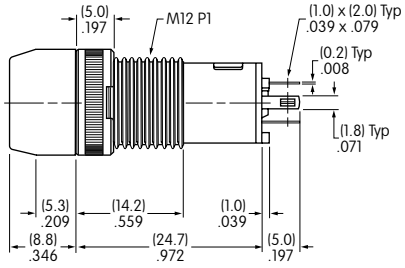



KB15SKW01B-6G-JB

Single pole models do not have terminals 4, 5, & 6.

Square • Barrier • Snap-in Mount — Single & Double Pole



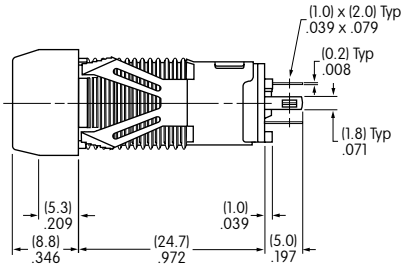



KB15KKW01B-5C-JC

Single pole models do not have terminals 4, 5, & 6.

Rectangular • Barrier • Bushing Mount — Single & Double Pole



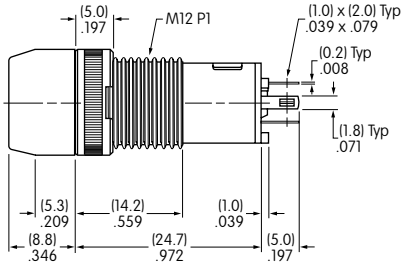



KB15RKW01B-5F-JF

Single pole models do not have terminals 4, 5, & 6.

Rectangular • Barrier • Snap-in Mount — Single & Double Pole



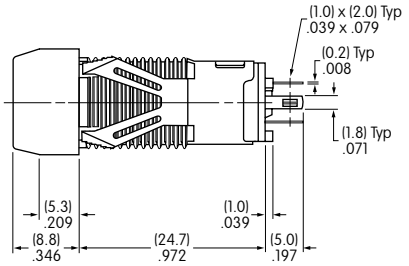



KB15NKW01B-5D-JD

Single pole models do not have terminals 4, 5, & 6.

OPTIONAL ACCESSORIES

PCB Adaptors

AT701
Single Pole
Straight PC
Terminals

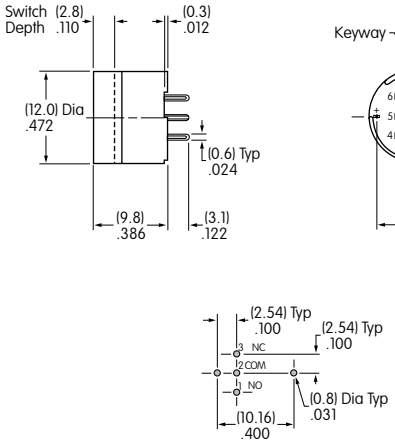

AT702
Double Pole
Straight PC
Terminals

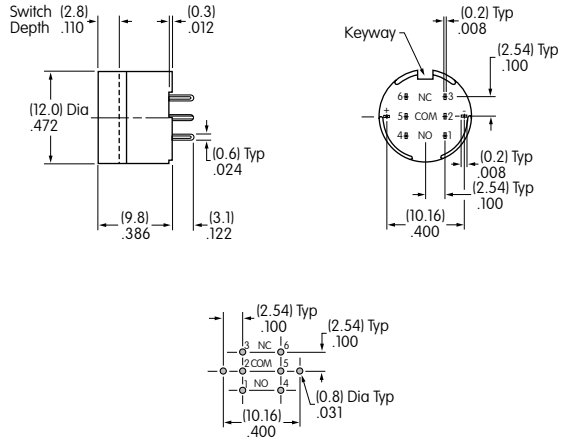

Material: Glass fiber reinforced polyamide Note: Order adaptors separately

Dust Covers

Panel Thickness Range: .020 ~ .268" (0.5 ~ 6.8mm) for Bushing Mounting; .020 ~ .079" (0.5 ~ 2.0mm) for Snap-in Mounting
Dust Covers reduce the depth of switch behind panel by .047" (1.2mm).

AT495
For Square & Round
(not for Barrier type)



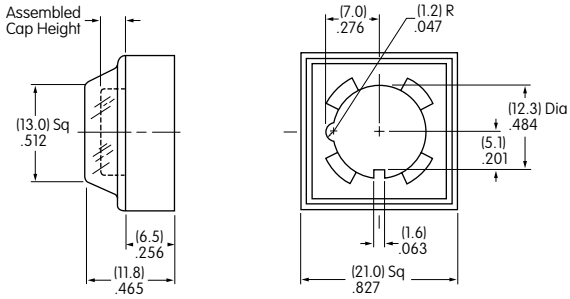

AT4025
For Rectangular
(not for Barrier type)

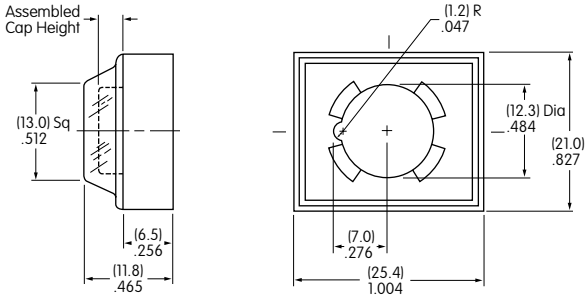

Material: Lid: PVC PVC loses pliability below 0°C (32°F). Base: Polyamide

OPTIONAL ACCESSORIES

Protective Guards

AT494
For Square & Round
(not for Barrier type)

AT4024
For Rectangular
(not for Barrier type)

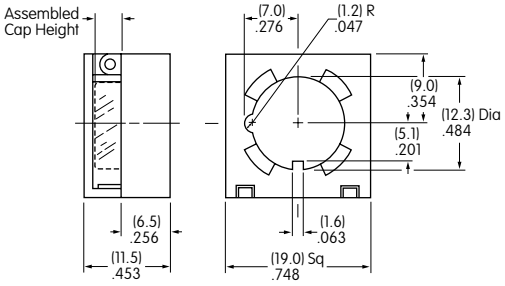

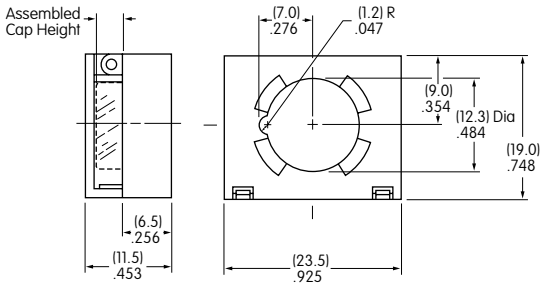

Panel Thickness Range:

.020″ ~ .268″
(0.5 ~ 6.8mm)
for Bushing Mounting

.020″ ~ .091″
(0.5 ~ 2.3mm)
for Snap-in Mounting

Protective Guards reduce the depth of switch behind panel by .047″ (1.2mm).

Material: Cover: Polycarbonate Base: Polyamide

ASSEMBLY INSTRUCTIONS

Cap Removal & Installation

For alternate action models cap must be in UP position for cap removal. Indentations on opposite sides of the cap provide an easy way to lift the cap out of the holder, using either the finger nails, or cap extractor AT109.



LED Polarity & Orientation in Lamp Socket

Super Bright LEDs AT625, AT631, & AT632 are electrostatic sensitive.

ATTENTION
ELECTROSTATIC SENSITIVE DEVICES

LED AT635

LED AT634

LEDs AT625 AT631 AT632



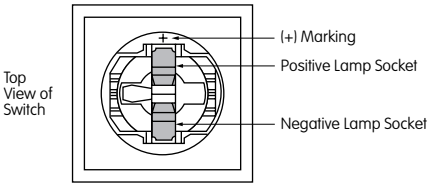

Cap Replacement

Note that the cap has a pair of round tabs and a pair of long tabs which should be used for correctly replacing the cap in its holder. Using the long tabs as guides, slide the cap with the long tabs moving into the slots on opposite sides of the cap holder. Then, the round tabs will snap into notches on the other two sides of the holder.

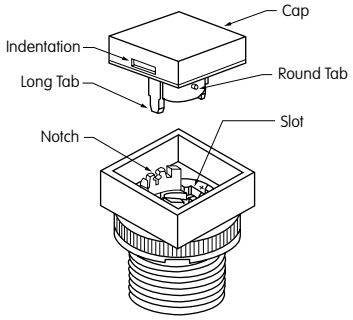

AT108 Socket Wrench for Bushing Mounting

Overtightening the mounting nut may damage the switch housing.

AT109 Cap Extractor

AT111 Lamping Tool



TYPICAL SWITCH ORDERING EXAMPLE

KB | 1 | 5 | C | K | W01 | ☐ — 12 — FF

Poles

1	SPDT
2	DPDT

Circuits

5	ON	(ON)
( ) = Momentary		
6	ON	ON
Alternate Action with Latchdown		

Shapes

Bushing Mounting	
S	Square
C	Round
R	Rectangular
Snap-in Mounting	
K	Square
M	Round
N	Rectangular

Housing

K	Black only

Contacts & Terminals

W01	Silver Contacts and Solder Lug Terminals* 1A @ 125/250V AC
G01	Gold Contacts and Solder Lug Terminals* 0.4VA @ 28V AC/DC

Barrier Type

No Code	No Barrier
B	With Barrier

Lamps

Incandescent Lamp Used with Solid Cap

05	5-volt
12	12-volt
No Code	Nonilluminated

Incandescent or Neon Used with Insert Cap

05	5-volt
12	12-volt
01	110-volt Neon
No Code	Nonilluminated

Bright LED Used with Cap for LED

Colors		Resistor	
5C	Red	No Code	No Resistor
5D	Amber	05	5-volt
5F	Green	12	12-volt
		24	24-volt

Super Bright LED Used with Cap for LED

6B	White
6F	Green
6G	Blue

Cap Types & Colors

Solid Cap: Lens/Filter Colors

A	Black/None (Nonilluminated Only. Available in Square and Round Only.)		
BB	White/White	FB	Green/White
CB	Red/White	FF	Green/Green
CC	Red/Red	GB	Blue/White
EB	Yellow/White	GG	Blue/Blue

Insert Cap: Lens/Filter Colors

JB	Clear/White
JC	Clear/Red
JE	Clear/Yellow
* JF	Clear/Green
*JG	Clear/Blue

* JF & JG not suitable with neon.

LED Cap: Lens/Diffuser Colors

AB	Square Spot Illuminated Black Cap/White Window
JB	Clear/White
JC	Clear/Red
JD	Clear/Amber
JF	Clear/Green

LED Cap: Lens/Diffuser Colors

JB	Clear/White

IMPORTANT:

Switches are supplied without UL, cULus, & CSA markings unless specified. Specific models & ratings noted on General Specifications page.

* Wire harness & cable assemblies offered only in Americas

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

KB15CKW01-12-FF