


Stainless Steel Sleeve (c)



(b) STRIPPING DIMENSIONS

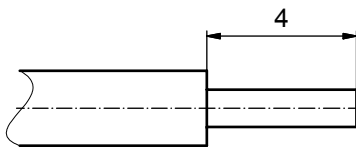

NOTES:

1. MATERIAL: COPPER ALLOY
2. PLATING: SEE TABLE
- (b) 3. CRIMPING: USE CRIMP TOOL 360X10329X WITH TOOL INSERT 360X20039X
SELECTOR SETTINGS: 7 FOR AWG 20
6 FOR AWG 22
5 FOR AWG 24

Plating	Part no.
min. 30µ" HARD GOLD over min. 50µ" NICKEL	132C15019X
min. 50µ" HARD GOLD over min. 50µ" NICKEL	132J15019X

Directive 2002/95/EC
„RoHS“
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name	finish:	tolerance	dim. in mm
				SEE NOTES	ISO 2768-m	
6 x d	Ä 2532	12.07.06	HS			
2 x c	Ä 2193	21.03.05	Lehmen			
2 x b	Ä 2177	02.03.05	Lehmen			
a	Origin					

scale:	10:1
material:	SEE NOTES
title:	SIGNAL CRIMP CONTACT SOCKET CONTACT Wire Size 20-24
dwg no:	Inventor 10 (d) DIN-A3
part no:	16K1A471A sh: 1
part no:	SEE TABLE

