



## FEATURES

- Low-cost holder for 16.3 mm MicroCan
- Printed circuit board mount
- Contacts are 302 spring stainless steel
- Flammability rating: UL94V-O
- Two versions:
  - DS9094F for F5 MicroCan (flanged rim, 5.8 mm high)
  - DS9094FS for surface mounting F5 MicroCan (flanged rim, 5.8 mm high)
- Printed circuit contacts are selectively tin-lead plated for improved solderability

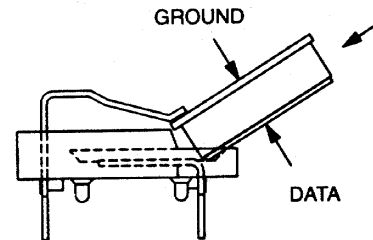


INSERTION OF iButton



## PC BOARD MOUNTING DETAILS



DS9094F

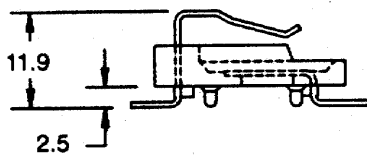

DS9094FS

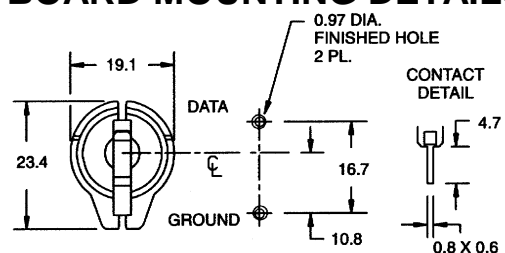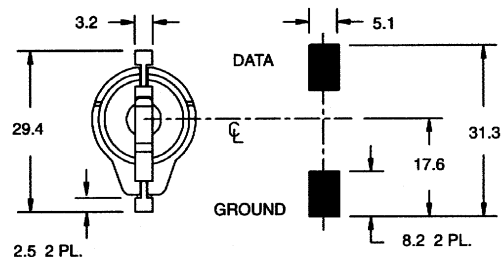
 DS9094F  
 RECOMMENDED HOLE SIZE

 DS9094FS  
 RECOMMENDED PAD SIZE

All dimensions are in millimeters.

## DESCRIPTION

The DS9094 iButton Clip holds an iButton and connects to a printed circuit board. By deflecting the spring clip in the molded housing, an iButton can be inserted and extracted without special tools. If reverse insertion is attempted, the beveled edge on the housing prevents contact.

## NOTE:

Due to the large variation of cycles and temperatures in reflow ovens, it is recommended to experiment with this clip first before using it in production. If guaranteed compliance with the reflow soldering process is required, the DS9098 iButton Retainer should be preferred.