

## Radiation Hardened CMOS Dual DPST Analog Switch

Intersil's Satellite Applications Flow™ (SAF) devices are fully tested and guaranteed to 100kRAD Total Dose. These QML Class T devices are processed to a standard flow intended to meet the cost and shorter lead-time needs of large volume satellite manufacturers, while maintaining a high level of reliability.

The HS-302RH-T analog switch is a monolithic device fabricated using Radiation Hardened CMOS technology and the Intersil dielectric isolation process for latch-up free operation. Improved total dose hardness is obtained by layout (thin oxide tabs extending to a channel stop) and processing (hardened gate oxide). These switches offer low-resistance switching performance for analog voltages up to the supply rails. "ON" resistance is low and stays reasonably constant over the full range of operating voltage and current. "ON" resistance also stays reasonably constant when exposed to radiation, being typically 30Ω pre-rad and 35Ω post 100kRAD(Si). This device provide break-before-make switching.

### Specifications

Specifications for Rad Hard QML devices are controlled by the Defense Supply Center in Columbus (DSCC). The SMD numbers listed below must be used when ordering.

**Detailed Electrical Specifications for the HS-302RH-T are contained in SMD 5962-95812.** A "hot-link" is provided from our website for downloading.

[www.intersil.com/spacedefense/newsafclasst.asp](http://www.intersil.com/spacedefense/newsafclasst.asp)

Intersil's Quality Management Plan (QM Plan), listing all Class T screening operations, is also available on our website.

[www.intersil.com/spacedefense/newsafclasst.asp](http://www.intersil.com/spacedefense/newsafclasst.asp)

### Ordering Information

ORDERING NUMBER	PART NUMBER	TEMP. RANGE (°C)
5962R9581201TCC	HS1-302RH-T	-55 to 125
5962R9581201TXC	HS9-302RH-T	-55 to 125


NOTE: **Minimum order quantity for -T is 150 units through distribution, or 450 units direct.**

### Features


- QML Class T, Per MIL-PRF-38535
- Radiation Performance
  - Gamma Dose ( $\gamma$ )  $1 \times 10^5$  RAD(Si)
- No Latch-Up, Dielectrically Isolated Device Islands
- Pin for Pin Compatible with Intersil HI-302 Series Analog Switches
- Analog Signal Range 15V
- Low Leakage . . . . . 100nA (Max, Post Rad)
- Low  $R_{ON}$  . . . . . 60Ω (Max, Post Rad)
- Low Operating Power. . . . . 100μA (Max, Post Rad)

### Pinouts


**HS1-302RH-T (SBDIP), CDIP2-T14**  
TOP VIEW



**HS9-302RH-T (FLATPACK), CDFP3-F14**  
TOP VIEW

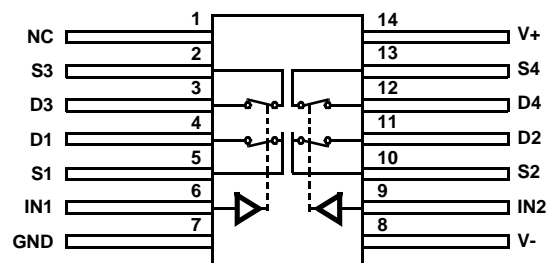

### Functional Diagram

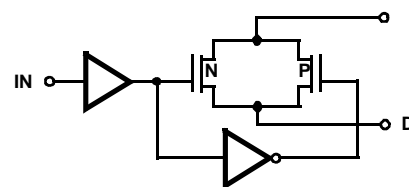

**TRUTH TABLE**

LOGIC	ALL SWITCHES
0	OFF
1	ON

**Die Characteristics**

**DIE DIMENSIONS:**

(2130µm x 1930µm x 279µm ±25.4µm)  
84 x 76 x 11mils ±1mil

**METALLIZATION:**

Type: Al  
Thickness: 12.5kÅ ±2kÅ

**SUBSTRATE POTENTIAL:**

Unbiased (DI)

**BACKSIDE FINISH:**

Gold

**PASSIVATION:**

Type: Silox (SiO<sub>2</sub>)  
Thickness: 8kÅ ±1kÅ

**WORST CASE CURRENT DENSITY:**

< 2.0e5 A/cm<sup>2</sup>


**TRANSISTOR COUNT:**

76

**PROCESS:**

Metal Gate CMOS, Dielectric Isolation

**Metallization Mask Layout**

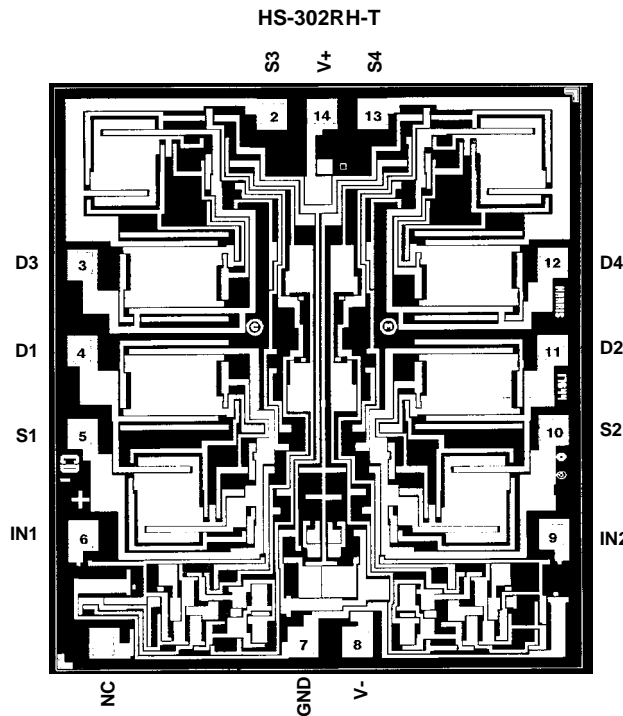

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems. Intersil Corporation's quality certifications can be viewed at [www.intersil.com/design/quality](http://www.intersil.com/design/quality)

*Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.*

For information regarding Intersil Corporation and its products, see [www.intersil.com](http://www.intersil.com)

**Sales Office Headquarters**

**NORTH AMERICA**  
Intersil Corporation  
7585 Irvine Center Drive  
Suite 100  
Irvine, CA 92618  
TEL: (949) 341-7000  
FAX: (949) 341-7123

Intersil Corporation  
2401 Palm Bay Rd.  
Palm Bay, FL 32905  
TEL: (321) 724-7000  
FAX: (321) 724-7946

**EUROPE**  
Intersil Europe Sarl  
Ave. William Graisse, 3  
1006 Lausanne  
Switzerland  
TEL: +41 21 6140560  
FAX: +41 21 6140579

**ASIA**  
Intersil Corporation  
Unit 1804 18/F Guangdong Water Building  
83 Austin Road  
TST, Kowloon Hong Kong  
TEL: +852 2723 6339  
FAX: +852 2730 1433