

GFCB3
East Europe Band

Inquiry

Application

for Spurious reduction

Characteristics


| | |
|----------------------|------------------------------|
| GFCB3(Bulk Type) | |
| GFCB3-T(Taping Type) | |
| Zin/Zout | 75 ohm Nominal |
| Pass Band | 65 up to 74MHz |
| Insertion Loss | 3dB max (65 up to 74MHz) |
| Attenuation | 20 dB min (0 up to 10MHz) |
| | 15 dB min (150 up to 250MHz) |

Number of ordered pieces


4000pcs/Box

Dimensions

Dimension (Unit : mm)

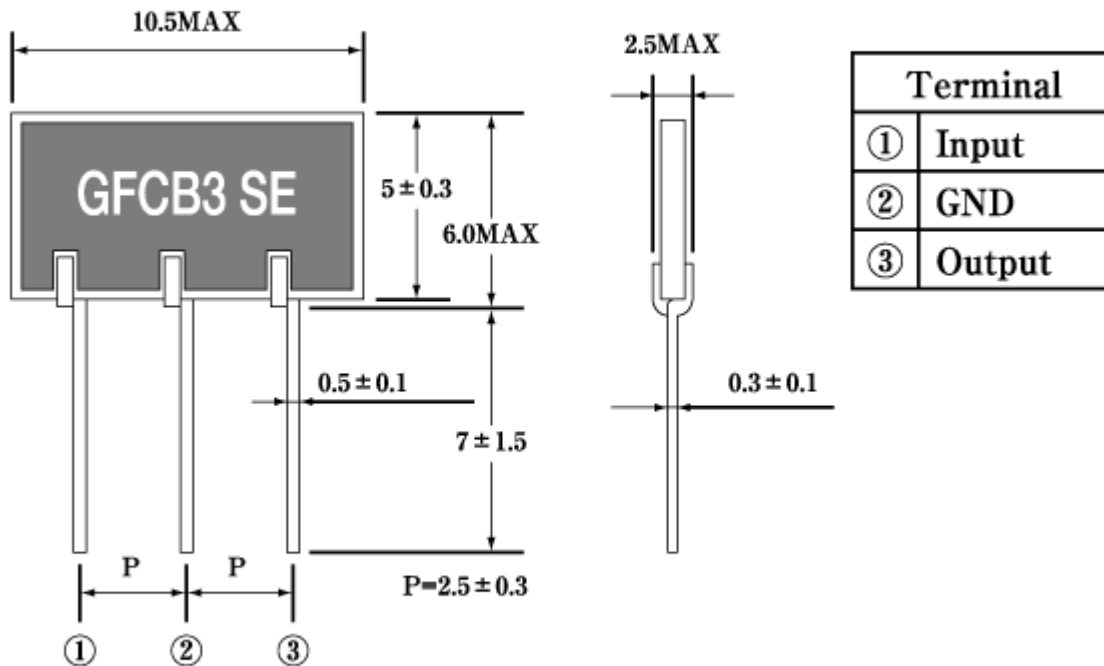

Frequency Data

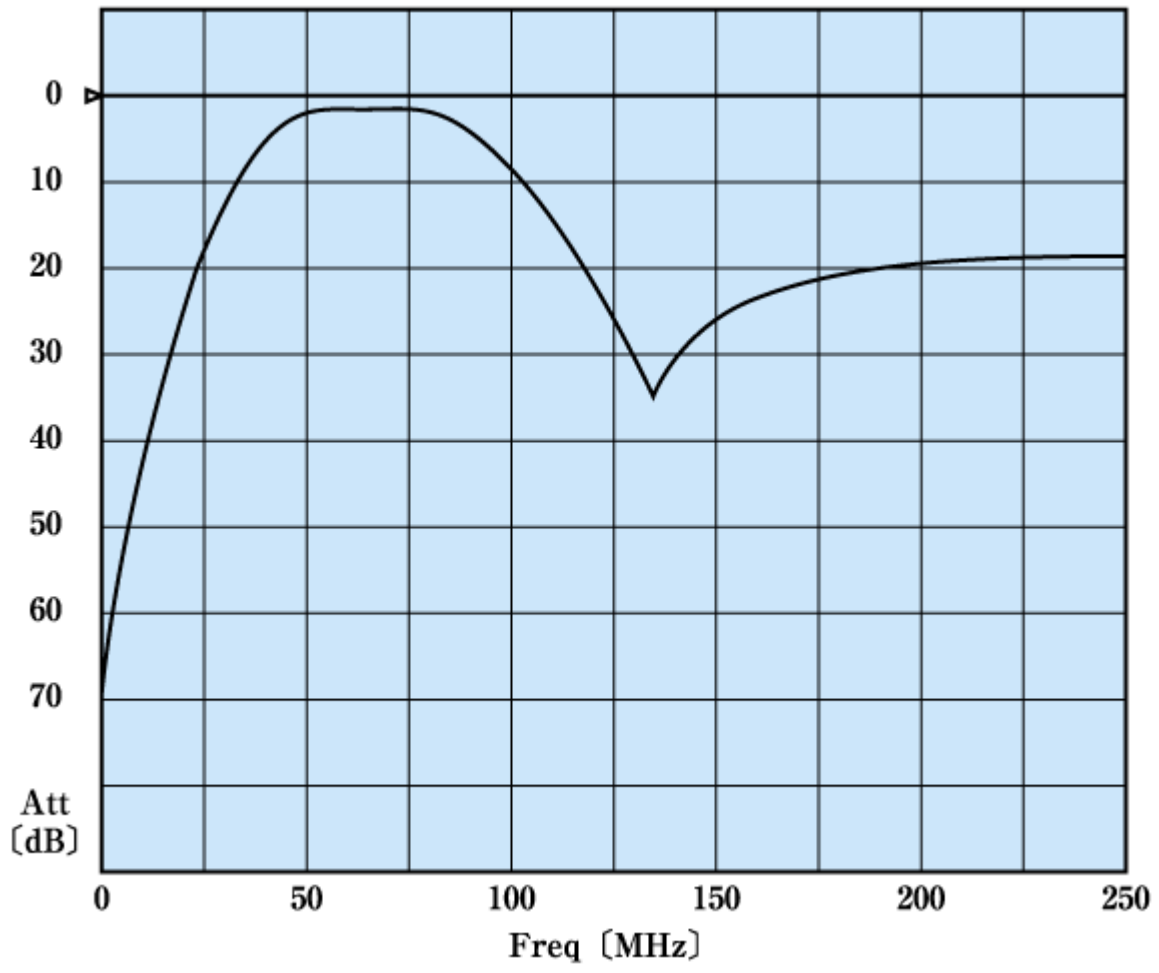

► Products li