


Shape

KC-1201
KC-1206



Model Number	KC-1201	KC-1206
Rated Voltage (Vo-p)	1.5	5.0
Operating Voltage Range (Vo-p)	1.0 ~ 1.7	4.0 ~ 8.0
Current Consumption (mA)	Max. 40	Max. 50
Coil Resistance (Ω)	16.0 ± 2.4	40.0 ± 6.0
Sound Pressure Level (dBA)	Min. 85dBA(Typical 91)@10cm	
Rated Frequency (Hz)	2800	2400
Operating Temperature (°C)	-30 ~ +70	
Storage Temperature (°C)	-40 ~ +85	
Weight (Gram)	2.0	
Material	PBT	

Dimension

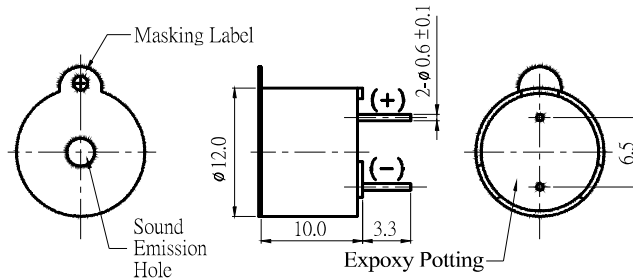


Tol : ±0.5 Unit : mm

Characteristic

KC-1201

A: Frequency Response, Magn dB re 20.00uPA

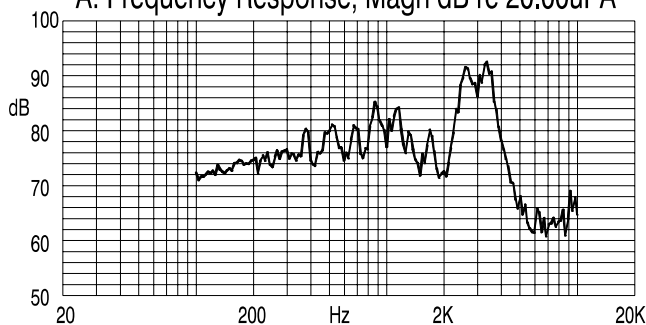

KC-1206

A: Frequency Response, Magn dB re 20.00uPA

