




**Snubber Capacitors
Polypropylene**

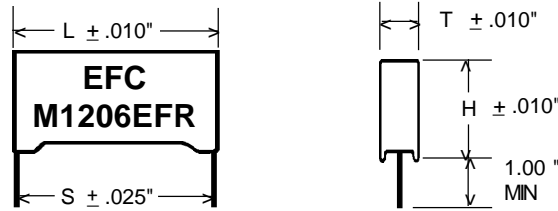

Lead Specs.
Tinned Copperweld

C through E cases: 22 AWG
F through Q cases: 20 AWG

DIMENSIONS and RATINGS

Cap. μ F	160/100 VDC/VAC	250/160 VDC/VAC	400/250 VDC/VAC	630/300 VDC/VAC	CASE SIZE	L $\frac{\text{mm}}{\text{in.}}$	T $\frac{\text{mm}}{\text{in.}}$	H $\frac{\text{mm}}{\text{in.}}$	S $\frac{\text{mm}}{\text{in.}}$
0.001	C	C	C	C	C	.13	.4	.9	.10
0.0012	C	C	C	C	C	.512	.157	.354	.394
0.0015	C	C	C	C	D	.13	.5	.11	.10
0.0022	C	C	C	C	D	.512	.197	.433	.394
0.0027	C	C	C	C	E	.13	.6	.12	.10
0.0033	C	C	C	C	E	.512	.236	.472	.394
0.0039	C	C	C	C	F	.18	.5	.11	.15
0.0047	C	C	C	C	F	.709	.197	.433	.591
0.0056	C	C	C	C	G	.18	.6	.12	.15
0.0068	C	C	C	C	G	.709	.236	.472	.591
0.0082	C	C	C	D	H	.18	.75	.13.5	.15
0.01	C	C	C	D	H	.709	.295	.531	.591
0.012	C	C	C	D	L	.26.5	.6	.15	.22.5
0.015	C	C	C	E	L	1.04	.236	.591	.886
0.018	C	C	D	E	M	.26.5	.7	.16	.22.5
0.022	C	C	D	F	M	1.04	.276	.630	.886
0.027	C	D	D	F	N	.26.5	.8.5	.16.3	.22.5
0.033	C	D	E	G	N	1.04	.335	.642	.886
0.039	D	D	F	H	O	.26.5	.10	.19	.22.5
0.047	D	E	G	H	O	1.04	.394	.748	.886
0.056	E	E	G	L	P	.32	.11	.20	.27.5
0.068	E	F	G	L	P	1.26	.433	.787	1.08
0.082	F	G	L	M	Q	.32	.13	.22	.27.5
0.1	F	G	L	N	Q	1.26	.512	.866	1.08
0.12	G	H	M	N					
0.15	G	L	M	O					
0.18	H	L	N	P					
0.22	L	L	N	P					
0.27	M	M	O	P					
0.33	N	N	P	Q					
0.39	N	O	P						
0.47	O	O	Q						
0.56	O	P	Q						
0.68	P	P							
0.82	P	Q							
1.00	Q								
1.20	Q								

EFC will manufacture to any non-standard value and size. Please consult factory for special requirements.

Reidville Industrial Park * 41 Interstate Lane
WATERBURY, CONNECTICUT 06705