


586 900

RED INSULATION

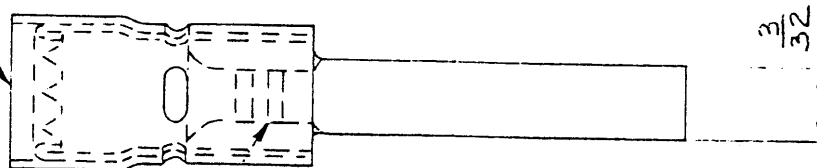

SERRATIONS

FOR INSULATION
DIA. .080-.125.

$$\frac{31}{64} \text{ (MIN)}$$

031

$$\frac{1}{32} \text{ MIN.}$$
$$\frac{7}{8} \text{ (MAX)}$$

MATERIAL COPPER	HEAT TREAT ANNEALED	COATING OR PLATING ELECTRO-TIN
--------------------	------------------------	-----------------------------------

UNLESS OTHERWISE SPECIFIED	REMOVE BURRS. BREAK SHARP EDGES 1/64 R. MAX
	FRACTIONS: $\pm 1/64$ DECIMALS: $.000 \pm .005$
	ANGLES: $\pm 0^\circ 30'$ $.0000 \pm .0005$

FIRST USED	WIRE RANGE	CLASS	TYPE	SCALE
	22-16	TAB	P.I.D.G.	4/1

P.P.P.	AREA		AIRCRAFT—MARINE PRODUCTS (GREAT BRITAIN) LTD. LONDON, E.C.1.
DR B. A. SMITH			

CHK	LOC	NO	REV
<i>[Signature]</i>	A	C.150730	

APP	5.6.63	NAME	WIRE TERMINAL
REL			

WIRE TERMINAL

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

נעמו, היפו

LTR

REVISION RECORD

FCA

DR
CHK

DATE _____

REL

MP 1254 7/80 GB

OZALID 1/63