
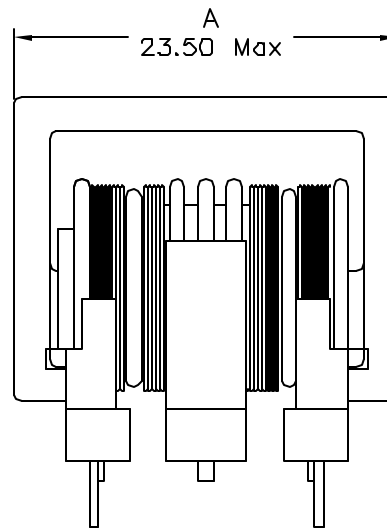
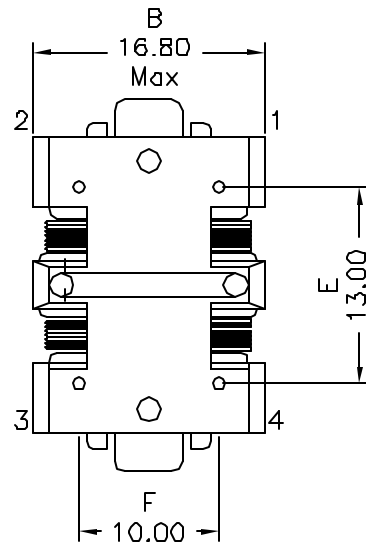



1. Mechanical Dimensions:

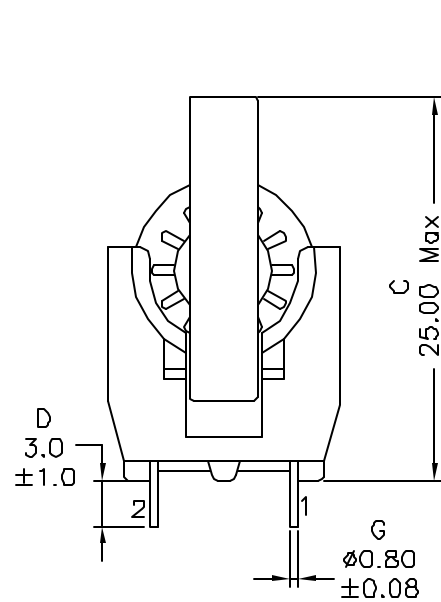

TOP Marking:

XF0103-ET20 YYWW

2. Schematic:

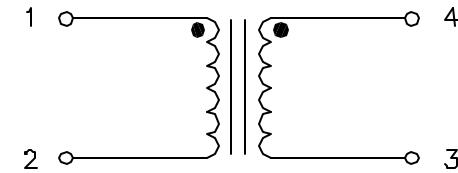

3. Electrical Specifications:

OCL: 10mH-30/+50% @10KHz 0.1V, Each Wdg

Q: Pins 1-2 15 Min @10KHz 0.1V

DCR: 0.300 Ohms Typ, Each Wdg

IDC: 1.4Arms Max

Rated Voltage: 250Vac/dc

Isolation Voltage: 1500Vac Wdg to Wdg

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index > 28%
4. Insulation System: Class F 155°C. UL file E151558
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/8

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc www.XFMRS.com		Title: LINE FILTER	
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.30 Dimensions in mm	P/N: XF0103-ET20		REV. A
	DWN.	Feng	Jan-15-11
	CHK.	YK Liao	Jan-15-11
	SHEET 1 OF 1	APP.	Joe Huff Jan-15-11