


## Shape

**KX-2506**  
**KX-2512**



Model Number	KX-2506	KX-2512
Rated Voltage (Vo-p)	6.0	12.0
Operating Voltage Range (Vo-p)	5.0 ~ 8.0	8.0 ~ 16.0
Current Consumption (mA)	Max. 80	
Coil Resistance ( $\Omega$ )	36.0 $\pm$ 5.4	115.0 $\pm$ 17.2
Sound Pressure Level (dBA)	Min. 85dBA(Typical 90)@10cm	
Rated Frequency (Hz)	1000	1000
Operating Temperature ( $^{\circ}$ C)	-20 ~ +60	
Storage Temperature ( $^{\circ}$ C)	-30 ~ +70	
Weight (Gram)	10.0	
Material	PPO (Black)	

## Dimension

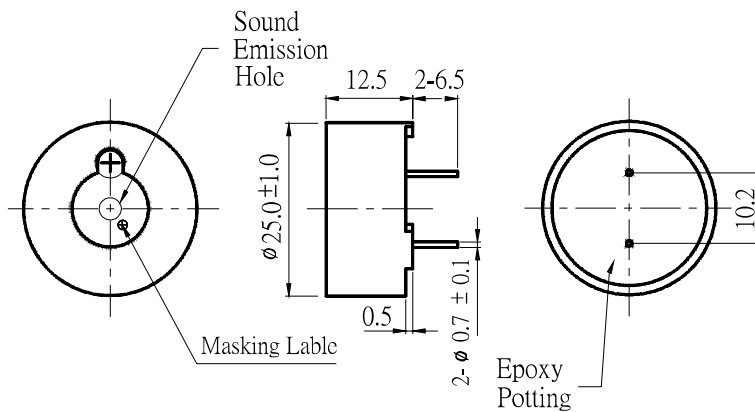


Tol:  $\pm$ 0.5 Unit: mm

## Characteristic

**KX-2506**

A: Frequency Response, Magn dB re 20.00uPA

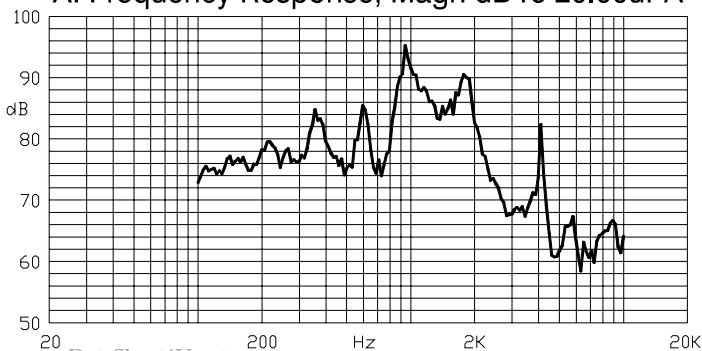

**KX-2512**

A: Frequency Response, Magn dB re 20.00uPA

