

Time-Delay Glass Fuses


5mm x 15mm

C519



C519 Time Delay Fuses

Dimensional Data

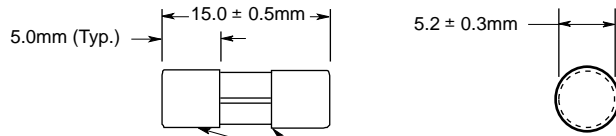

Dimensions are in Millimeters (mm)

Markings: Manufacturer's Symbol, Product Symbol, Voltage, Ampere, Testing Agency Mark (Optional)

Limits for Pre-arcing Time/UL Listed Fuses.

Amp Ratings	135%		200%	
	MAX	MIN	MAX	MIN
125mA - 5A	60 min.	3 sec.	2 min.	3 sec.

Limits for Pre-arcing Time/UL Recognized Fuses.

Amp Ratings	350mA	600mA	2A	6A
	MIN	MAX	MAX	MAX
350mA	240 min.	90 sec.	2 sec.	500 millisecc.



Agency File Numbers: UL Listing.
 Guide # JDYX, File E75865
 CSA Certification.
 Class 1422-01, File LR65063
 UL Recognized.
 Guide # JDYX2, File E75865d

Product Symbol: C519
Physical Fuse Size: 5 x 15mm

Mechanical Characteristics:
Materials: Endcaps are silver-plated brass; leads are tin-plated copper and tube is glass.
Temp. Range: -55°C to +85°C with proper derating.

CE logo denotes compliance with European Union Low Voltage Directive (50-1000V AC, 75-1500V DC). Refer to BIF document #8002 or contact Bussmann Application Engineering at 314-527-1270 for more information.

Time-Current Characteristic Curves—Average Melt (Full Size Curves Available)

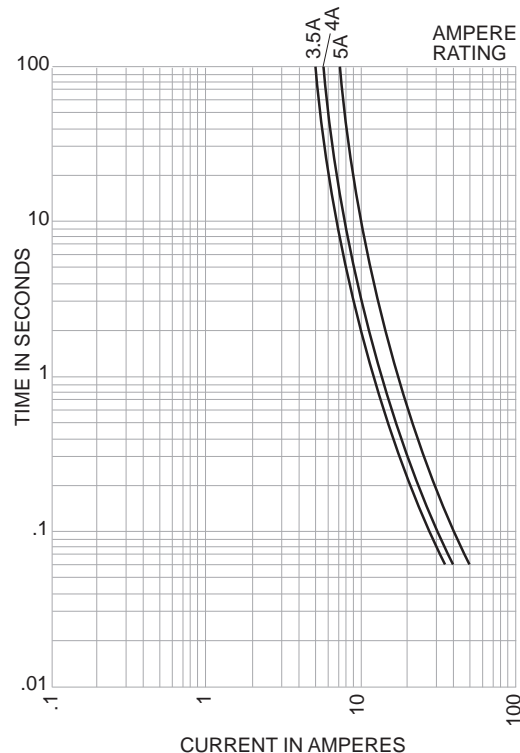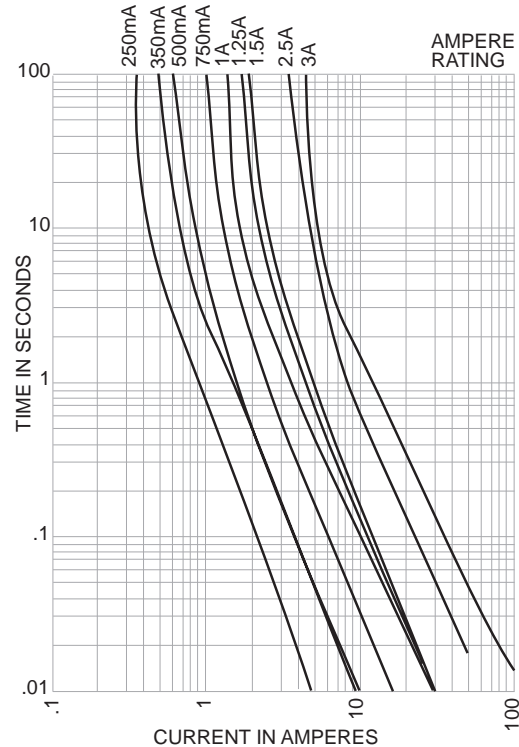

Time-Delay Glass Fuses

5mm x 15mm

C519



Electrical Characteristics:

Current Rating	Rated Voltage (V)AC	AIR	Voltage Drop (mV) max.	Pre-arcing Value (I ² t) (A ² s) typ.	U.L.	U.R.	CSA
125mA	250V	35A/250V 10kA/125V AC p.f. = 0.7 - 0.8	1200	0.039	•		•
250mA			630	0.18	•		•
350mA		35A/250V 10kA/125V AC 25A/600V p.f. = 0.7 - 0.8	520	0.9		•	
375mA			490	0.9	•		•
500mA		35A/250V AC 10kA/125V AC p.f. = 0.7 - 0.8	410	1.1	•		•
600mA			350	2.7	•		•
750mA			300	2.7	•		•
1A			250	6.4	•		•
1.25A			220	7.6	•		•
1.5A			200	13	•		•
1.6A		100A/250V AC 10ka/125V AC p.f. = 0.7 - 0.8	200	14	•		•
2A			200	27	•		•
2.25A			200	31	•		•
2.5A			190	42	•		•
3A	190		94	•		•	
3.5A	125V		400A/125V AC p.f. = 1.0	180	94		•
4A		150		145		•	
5A		150		230		•	

Telecommunication Capabilities:

UL 1459: Telephone Equipment

Fuses successfully opened:
 600 Volts (AC) 40 Amps
 600 Volts (AC) 7 Amps
 600 Volts (AC) 2.2 Amps

UL 497: Protectors for Paired Conductor Communication Circuits

Fuses successfully passed without opening:
 10 x 1000 microsecond waveform
 50 pulses/1 pulse every 8 seconds†
 @ 1000V

Fuse Rating	Peak Current (A)
250mA	12.5
350mA	19.5
375mA	20.0
500mA	28.5
600mA	36.5
750mA	49.0
1A	66.5
1.25A	100.0

† Fuse resistance was not allowed to vary by more than five percent after completion of the test.

Packaging & Ordering Information:

	C519			
	Product Symbol			Ampere Rating
			Blank - Standard S - Transparent Sleeve for sealed fuses.	125mA
				250mA
				350mA
				375mA
				500mA
				600mA
				750mA
				1A
				1.25A
				1.5A
				1.6A
				2A
				2.25A
				2.5A
				3A
				3.5A
				4A
				5A

Package Code
BK/ Bulk Package (100 pcs)
TR/ Tape & Reel (500 pcs)
TR1/ Tape & Reel (1,000 pcs)
TR2/ Tape & Reel (1,500 pcs)
NOTE: Tape & Reel Packaging per EIA 296-E (10.2mm Component Pitch and 52.4mm Tape-to-Tape Spacing)

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.