
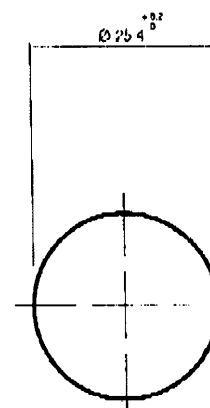


671 Series: | **Ø 25.4 mm Mounting Domed Lens (Six Chip LED)****NEW PRODUCT**

- Other DC and AC options available
- Bi-polar device
- RIA 12 approved versions available
- MLO 5
- Robust design for harsh environments
- Medium voltage options
- IP67 sealing
- MTBF 80,000 hrs

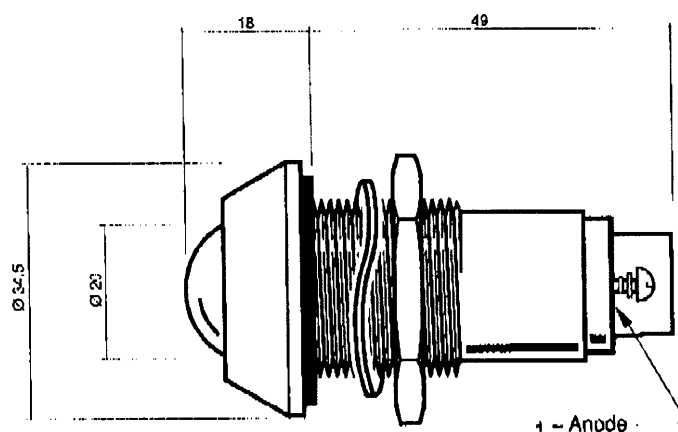

Mounting Hole

SCALE 1:1
DIMENSIONS IN MM (TYPICAL)

Ordering information and technical characteristics (Ta = 25°C)

Order code	Colour	Lens	Voltage AC/DC Vopr	Current AC/DC Iopr	Luminous Intensity lv @ Iopr	Wave Length λp	Viewing Angle (Inclusive)	Operating Temp Topr	Storage Temp Tstg
671 - 289 - 75	GaAlAs Red	Coloured Diffused	110	20	305	660	180	to +40	to +85
671 - 290 - 75	Red		110	20	180	635			
671 - 291 - 75	Yellow		110	20	160	585			
671 - 292 - 75	Green		110	20	155	565			
671 - 289 - 76	GaAlAs Red		240 VAC	25	305	660			
671 - 290 - 76	Red		240 VAC	25	180	635			
671 - 291 - 76	Yellow		240 VAC	25	160	585			
671 - 292 - 76	Green		240 VAC	25	155	565			
			V	mA	cd/m²	nm	deg	°C	°C