

E-Series Coupler

5 - 1000 MHz

ESDC-10-5-75

V3.00

Features

- Coupling: +10 dB Typical
- Surface Mount

Specifications @ 25°C

Frequency Range	5 - 1000 MHz	
Coupling	Nominal	Flatness
5 - 1000 MHz	10 ±1 dB	0.9 dB
Main Line Loss	Typical	Maximum
5 - 50 MHz	1.2 dB	1.4 dB
50 - 500 MHz	1.3 dB	1.5 dB
500 - 1000 MHz	1.4 dB	1.7 dB
Directivity	Typical	Minimum
5 - 50 MHz	22 dB	20 dB
50 - 500 MHz	20 dB	15 dB
500 - 1000 MHz	14 dB	8 dB
Return Loss	Typical	Minimum
	17 dB	14 dB

Operating Characteristics

Impedance	75 Ohms Nominal
-----------	-----------------


Ordering Information

Part No.	Packaging
ESDC-10-5-75	Tube
ESDC-10-5-75TR	Forward Tape & Reel

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating/Storage Temp.	-20°C to +85°C

SM-1

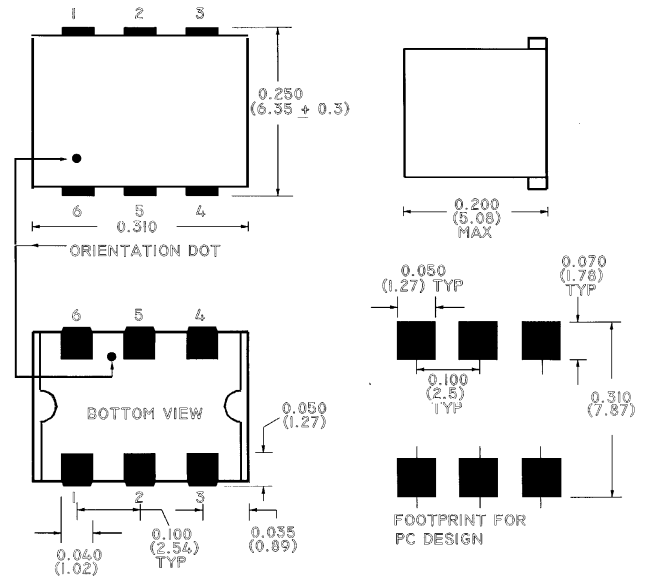

Dimensions in () are in mm.
 Unless Otherwise Noted: .x = ±0.04 (1.00)
 .xx = ±0.02 (0.50)
 .xxx = ±0.010 (0.250)

Pin Configuration

Function	Pin No.
Input	6
Output	1
Coupled	4
Ground	5
Case Ground	5
External 75 Ohms	3
Not Connected	2

S 0964 A

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266 ■ Asia/Pacific: Tel. +81 (03) 3226-1671 ■ Europe: Tel. +44 (1344) 869 595
 Fax (800) 618-8883 Fax +81 (03) 3226-1451 Fax +44 (1344) 300 020