



5-Tap Silicon Delay Line

MXD1005

General Description

The MXD1005 silicon delay line offers five equally spaced taps with delays ranging from 12ns to 250ns and a nominal accuracy of $\pm 2\text{ns}$ or $\pm 3\%$, whichever is greater. Relative to hybrid solutions, this device offers enhanced performance and higher reliability, and reduces overall cost. Each tap can drive up to ten 74LS loads.

The MXD1005 is available in multiple versions, each offering a different combination of delay times. It comes in the space-saving 8-pin μMAX package, as well as an 8-pin SO or DIP, allowing full compatibility with the DS1005 and other delay line products.

Features

- ◆ Improved Second Source to DS1005
- ◆ Available in Space-Saving 8-Pin μMAX Package
- ◆ 17mA Supply Current vs. Dallas' 40mA
- ◆ Low Cost
- ◆ Delay Tolerance of $\pm 2\text{ns}$ or $\pm 3\%$, whichever is Greater
- ◆ TTL/CMOS-Compatible Logic
- ◆ Leading- and Trailing-Edge Accuracy
- ◆ Custom Delays Available

Applications

- Clock Synchronization
- Digital Systems


Ordering Information

PART	TEMP. RANGE	PIN-PACKAGE
MXD1005C/D__	0°C to +70°C	Dice*
MXD1005PA__	-40°C to +85°C	8 Plastic DIP
MXD1005PD__	-40°C to +85°C	14 Plastic DIP
MXD1005SA__	-40°C to +85°C	8 SO
MXD1005SE__	-40°C to +85°C	16 Narrow SO
MXD1005UA__	-40°C to +85°C	8 μMAX

*Dice are tested at $T_A = +25^\circ\text{C}$.

Note: To complete the ordering information, fill in the blank with the part number extension from the Part Number and Delay Times table to indicate the desired delay per output.

Pin Configurations

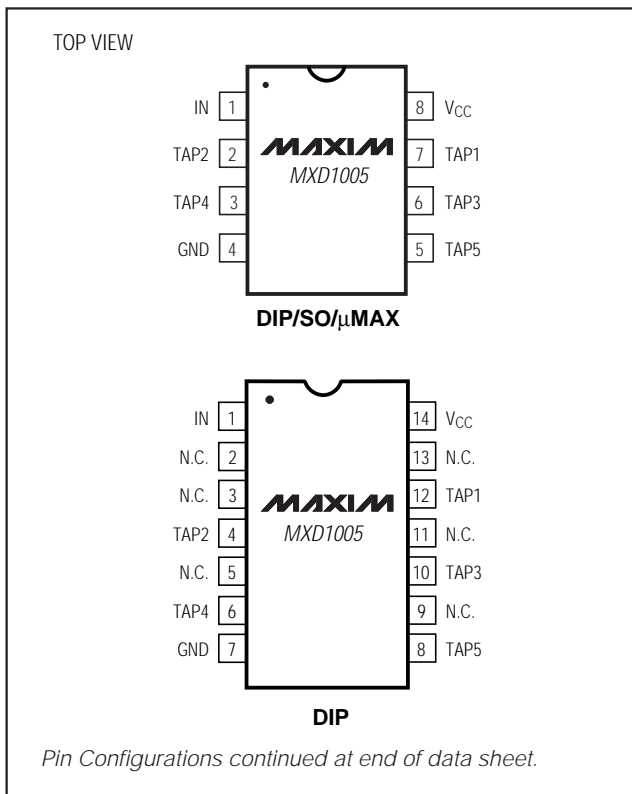

Part Number and Delay Times

PART NUMBER EXTENSION (MXD1005__ __)	DELAY (tPHL, tPLH) PER OUTPUT (ns)				
	TAP1	TAP2	TAP3	TAP4	TAP5
60	12	24	36	48	60
75	15	30	45	60	75
100	20	40	60	80	100
125	25	50	75	100	125
150	30	60	90	120	150
175	35	70	105	140	175
200	40	80	120	160	200
250	50	100	150	200	250

Note: Contact factory for characterization data.

Functional Diagram appears at end of data sheet.



5-Tap Silicon Delay Line

ABSOLUTE MAXIMUM RATINGS

V _{CC} to GND	-0.5V to +6V	8-Pin SO (derate 5.9mW/°C above +70°C).....	471mW
All Other Pins.....	-0.5V to (V _{CC} + 0.5V)	16-Pin Narrow SO (derate 8.7mW/°C above +70°C)	696mW
Short-Circuit Output Current (1sec)	50mA	8-Pin μMAX (derate 4.1mW/°C above +70°C)	330mW
Continuous Power Dissipation (T _A = +70°C)		Operating Temperature Range	-40°C to +85°C
8-Pin Plastic DIP (derate 9.1mW/°C above +70°C)	727mW	Storage Temperature Range	-65°C to +160°C
14-Pin Plastic DIP (derate 10.0mW/°C above +70°C) ..	800mW	Lead Temperature (soldering, 10sec)	+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V_{CC} = +5.0V ±5%, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Supply Voltage	V _{CC}	(Note 2)	4.75	5.00	5.25	V
Input Voltage High	V _{IH}	(Note 2)	2.2			V
Input Voltage Low	V _{IL}	(Note 2)			0.8	V
Input Leakage Current	I _L	0V ≤ V _{IN} ≤ V _{CC}	-1		1	μA
Active Current	I _{CC}	V _{CC} = 5.25V, period = minimum (Notes 3, 4)		17	70	mA
Output Current High	I _{OH}	V _{CC} = 4.75V, V _{OH} = 4.0V			-1	mA
Output Current Low	I _{OL}	V _{CC} = 4.75V, V _{OL} = 0.5V	12			mA
Input Capacitance	C _{IN}	T _A = +25°C (Note 5)		5	10	pF

TIMING CHARACTERISTICS

(V_{CC} = +5.0V ±5%, T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input Pulse Width	t _{WI}	(Note 6)	40% of TAP5 t _{PLH}			ns
Input-to-Tap Delay (leading edge)	t _{PLH}	(Notes 7–10)		See Part Number and Delay Times table		ns
Input-to-Tap Delay (trailing edge)	t _{PHL}	(Notes 7–10)		See Part Number and Delay Times table		ns
Power-Up Time	t _{PU}				100	ms
Period		(Note 6)	4(t _{WI})			ns

Note 1: Specifications to -40°C are guaranteed by design, not production tested.

Note 2: All voltages referenced to GND.

Note 3: Measured with outputs open.

Note 4: I_{CC} is a function of frequency and TAP5 delay. Only an MXD1005_60 operating with a 40ns period and V_{CC} = +5.25V will have a maximum I_{CC} of 70mA. For example, an MXD1005_100 will not exceed 30mA. See Supply Current vs. Input Frequency graph in *Typical Operating Characteristics*.

Note 5: Guaranteed by design.

Note 6: Pulse width and/or period specifications may be exceeded, but accuracy is application sensitive (i.e., layout, decoupling, etc.).

Note 7: V_{CC} = +5V at +25°C. Typical delays are accurate on both rising and falling edges within ±2ns or ±3%.

Note 8: See *Test Conditions* section.





Note 9: The combination of temperature variations from +25°C to 0°C or +25°C to +70°C and voltage variation from 5.0V to 4.75V or 5.0V to 5.25V may produce an additional typical input-to-tap delay shift of ±1.5ns or ±4%, whichever is greater.

Note 10: All taps and outputs delays tend to vary unilaterally with temperature or supply variations. For example, if TAP1 slows down, all other taps will also slow down; TAP3 cannot be faster than TAP2.

5-Tap Silicon Delay Line

Typical Operating Characteristics

(V_{CC} = +5V, T_A = +25°C, unless otherwise noted.)

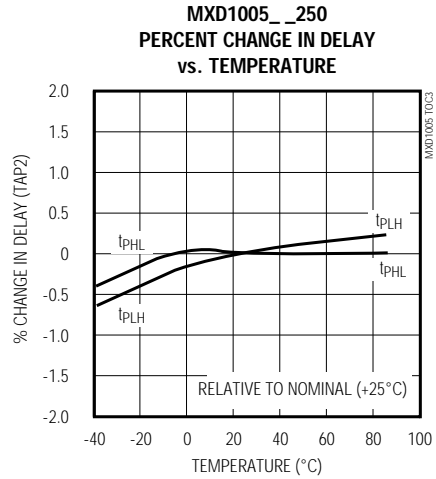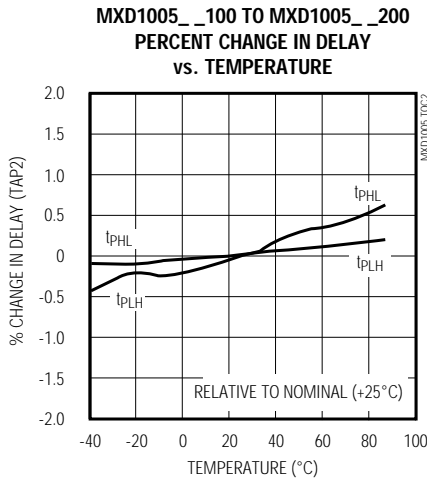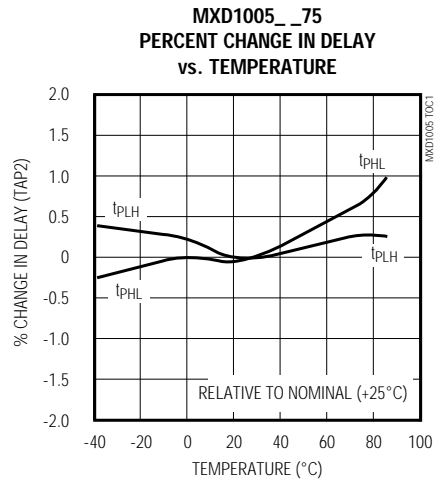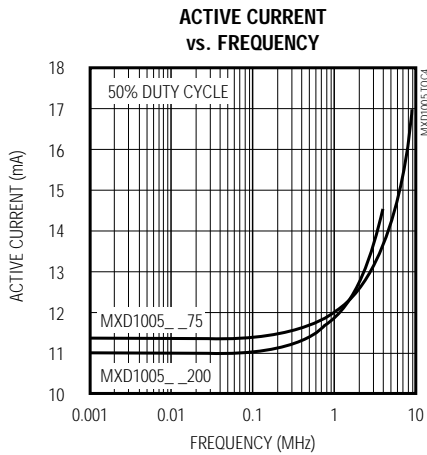

5-Tap Silicon Delay Line

Pin Description

PIN			NAME	FUNCTION
8-PIN DIP/SO/ μ MAX	14-PIN DIP	16-PIN SO		
1	1	1	IN	Signal Input
2	4	4	TAP2	40% of specified maximum delay
3	6	6	TAP4	80% of specified maximum delay
4	7	8	GND	Device Ground
5	8	9	TAP5	100% of maximum specified delay
6	10	11	TAP3	60% of specified maximum delay
7	12	13	TAP1	20% of specified maximum delay
8	14	16	VCC	Power-Supply Input
—	2, 3, 5, 9, 11, 13	2, 3, 5, 7, 10, 12, 14, 15	N.C.	No Connection. Not internally connected.

Note: Maximum delay is determined by the part number extension. See the Part Number and Delay Times table for more information.

Definitions of Terms

Period: The time elapsed between the first pulse's leading edge and the following pulse's leading edge.

Pulse Width (t_{WI}): The time elapsed on the pulse between the 1.5V level on the leading edge and the 1.5V level on the trailing edge, or vice-versa.

Input Rise Time (t_{RISE}): The time elapsed between the 20% and 80% points on the input pulse's leading edge.

Input Fall Time (t_{FALL}): The time elapsed between the 80% and 20% points on the input pulse's trailing edge.

Time Delay, Rising (t_{PLH}): The time elapsed between the 1.5V level on the input pulse's leading edge and the corresponding output pulse's leading edge.

Time Delay, Falling (t_{PHL}): The time elapsed between the 1.5V level on the input pulse's trailing edge and the corresponding output pulse's trailing edge.

Test Conditions

Ambient Temperature:	+25°C \pm 3°C
Supply Voltage (VCC):	+5V \pm 0.01V
Input Pulse:	High = 3.0V \pm 0.1V Low = 0.0V \pm 0.1V
Source Impedance:	50 Ω max
Rise and Fall Times:	3.0ns max
Pulse Width:	500ns max
Period:	1 μ s

Each output is loaded with a 74F04 input gate. Delay is measured at the 1.5V level on the rising and falling edges. The time delay due to the 74F04 is subtracted from the measured delay.

5-Tap Silicon Delay Line

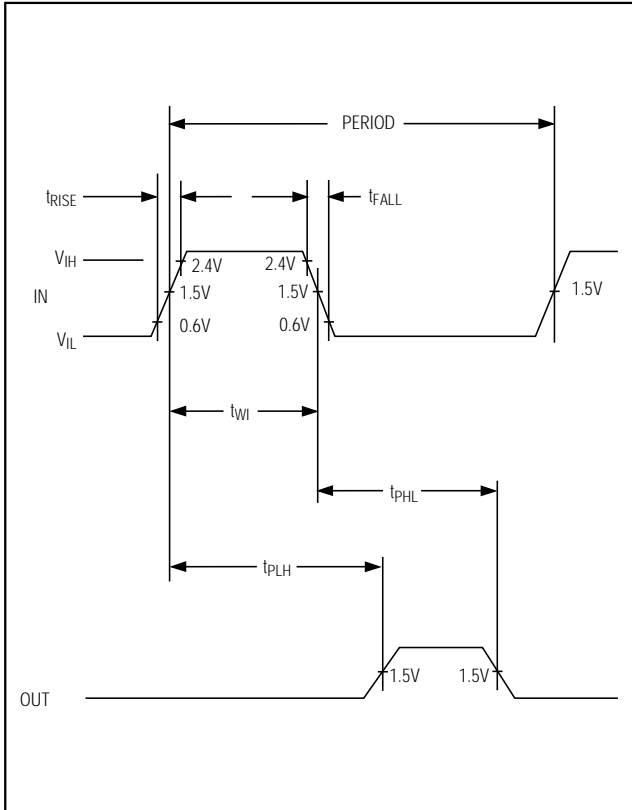


Figure 1. Timing Diagram

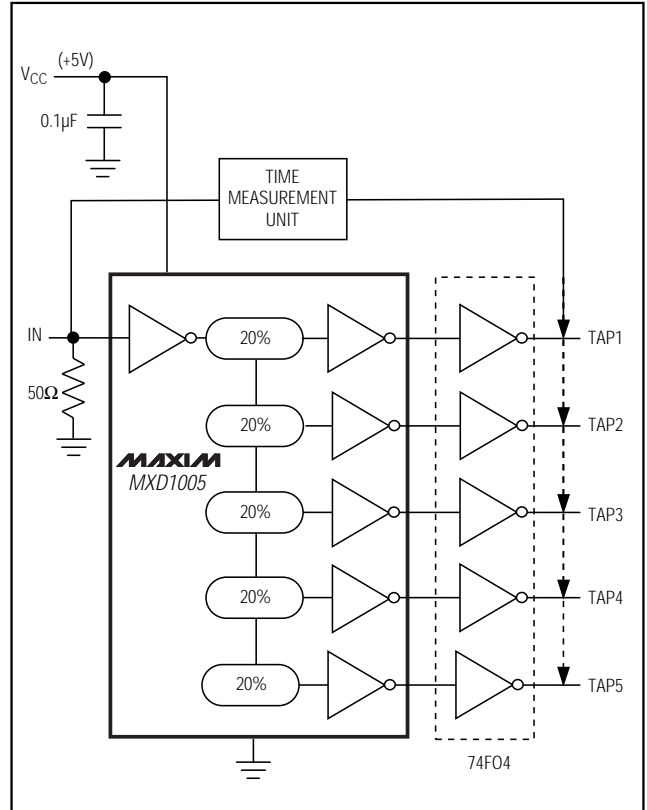


Figure 2. Test Circuit

Applications Information

Supply and Temperature Effects on Delay

Variations in supply voltage may affect the MXD1005's fixed tap delays. Supply voltages beyond the specified range may result with larger variations. The devices are internally compensated to reduce the effects of temperature variations. Although these devices might vary with supply and temperature, the delays vary unilaterally, which suggests that TAP3 can never be faster than TAP2.

Capacitance and Loading Effects on Delay


The output load can affect the tap delays. Larger capacitances tend to lengthen the rising and falling edges, thus increasing the tap delays. As the taps are loaded with other logic devices, the increased load will increase the tap delays.

Board Layout Considerations/Decoupling

The device should be driven with a source that can deliver the required current for proper operation. A 0.1μF ceramic bypassing capacitor could be used. The board should be designed to reduce stray capacitance.


5-Tap Silicon Delay Line

Functional Diagram

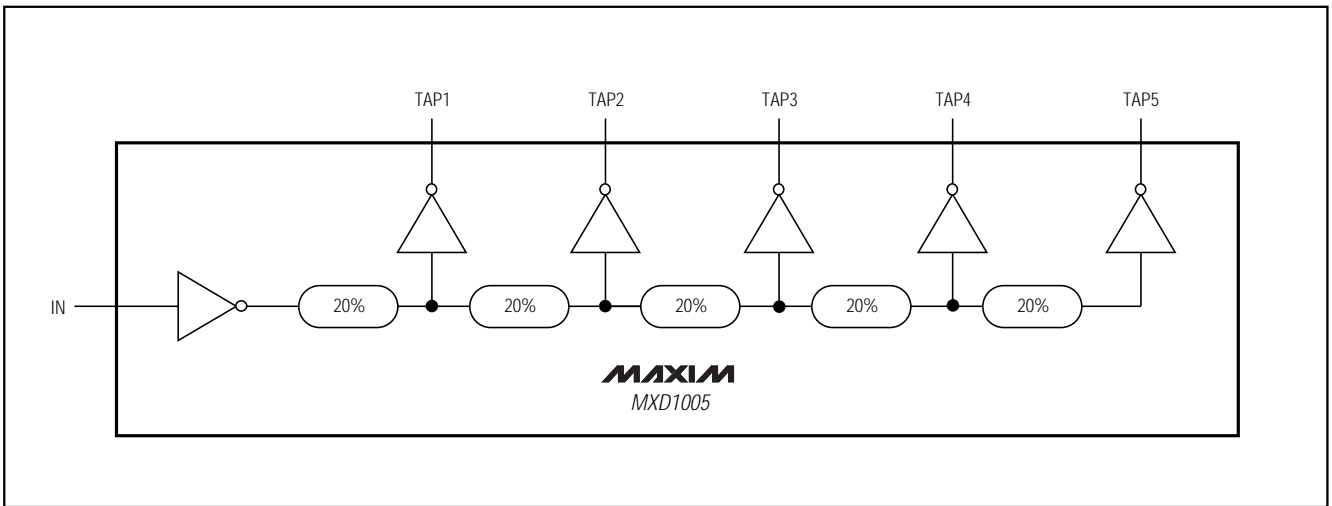

Pin Configurations (continued)

Chip Information

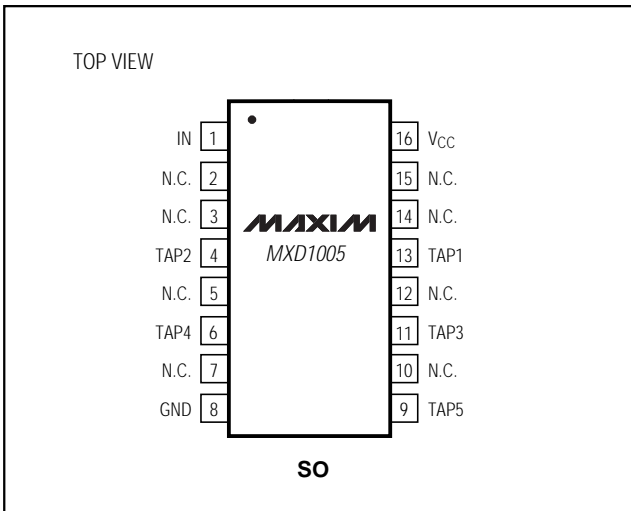


TRANSISTOR COUNT: 824

5-Tap Silicon Delay Line



Package Information

MXD1005

BILUMAND.EPS

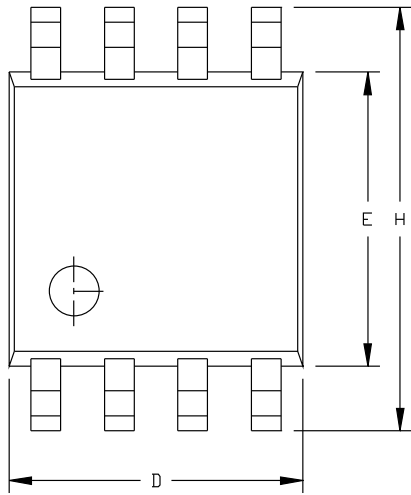

	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.036	0.044	0.91	1.11
A1	0.004	0.008	0.10	0.20
B	0.010	0.014	0.25	0.36
C	0.005	0.007	0.13	0.18
D	0.116	0.120	2.95	3.05
e	0.0256		0.65	
E	0.116	0.120	2.95	3.05
H	0.188	0.198	4.78	5.03
L	0.016	0.026	0.41	0.66
α	0°	6°	0°	6°

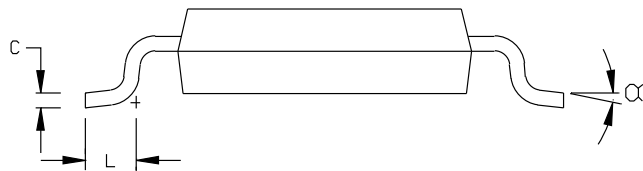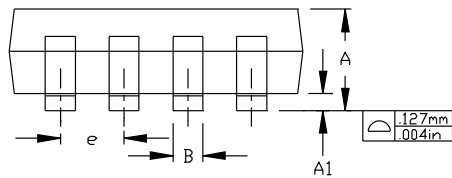

NOTES:

1. D&E DO NOT INCLUDE MOLD FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .15mm(.006").
3. CONTROLLING DIMENSION: INCHES

MAXIM		
<small>PROPRIETARY INFORMATION</small>		
<small>TITLE:</small>		
8LD μ MAX PACKAGE OUTLINE DWG.		
<small>APPROVAL</small>	<small>DOCUMENT CONTROL NO.</small>	<small>REV</small>
	21-0036	D 1/1

5-Tap Silicon Delay Line

Package Information (continued)

	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.053	0.069	1.35	1.75
A1	0.004	0.010	0.10	0.25
B	0.014	0.019	0.35	0.49
C	0.007	0.010	0.19	0.25
e	0.050		1.27	
E	0.150	0.157	3.80	4.00
H	0.228	0.244	5.80	6.20
h	0.010	0.020	0.25	0.50
L	0.016	0.050	0.40	1.27

	INCHES		MILLIMETERS		N	MS012
	MIN	MAX	MIN	MAX		
D	0.189	0.197	4.80	5.00	8	A
D	0.337	0.344	8.55	8.75	14	B
D	0.386	0.394	9.80	10.00	16	C

NOTES:
 1. D&E DO NOT INCLUDE MOLD FLASH
 2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .15mm (.006")
 3. LEADS TO BE COPLANAR WITHIN .102mm (.004")
 4. CONTROLLING DIMENSION: MILLIMETER
 5. MEETS JEDEC MS012-XX AS SHOWN IN ABOVE TABLE
 6. N = NUMBER OF PINS

MAXIM 120 SAN GABRIEL DR. SUNNYVALE CA 94086 FAX (408) 737 7154 PROPRIETARY INFORMATION
 PACKAGE FAMILY OUTLINE: SOIC .150"
 1/1 21-0041 A
 TITLE DOCUMENT CONTROL NUMBER REV

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

8 Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600