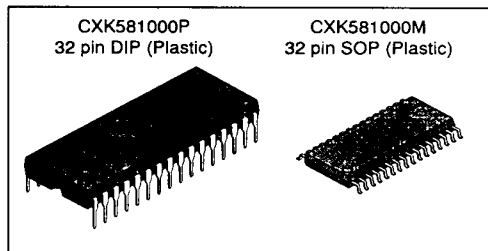


SONY**CXK581000P/M** -10L/12L/15L
-10LL/12LL/15LL**131072-word × 8-bit High Speed CMOS Static RAM****Description**

CXK581000P/M is a general purpose high speed CMOS static RAM organized as 131, 072 words by 8 bits. Operating on a single 5V supply, this asynchronous IC is suitable for high speed and low power consumption applications where battery back up for nonvolatility is required.

Features



- Fast access time : (Access time)
CXK581000P/M-10L/10LL 100ns (Max.)
CXK581000P/M-12L/12LL 120ns (Max.)
CXK581000P/M-15L/15LL 150ns (Max.)
- Low power consumption operation :
Standby /DC operation
CXK581000P/M-10L, 12L, 15L ; 10 μ W (Typ.) /35mW (Typ.)
10LL, 12LL, 15LL ; 3.5 μ W (Typ.) /35mW (Typ.)
- Single +5V supply : +5V $\pm$ 10%
- Fully static memory ... No clock or timing strobe required.
- Equal access and cycle time.
- Common data input and output:three state output.
- Directly TTL compatible : All inputs and outputs.
- Low voltage data retention : 2.0V (Min.)
- CXK581000P 600mil 32 pin DIP package
CXK581000M 525mil 32 pin SOP package

**Functions**

131,072 word × 8 bit static RAM

Structure

Silicon gate CMOS IC

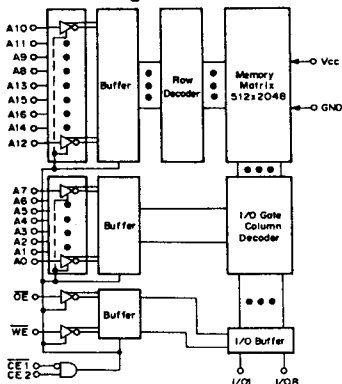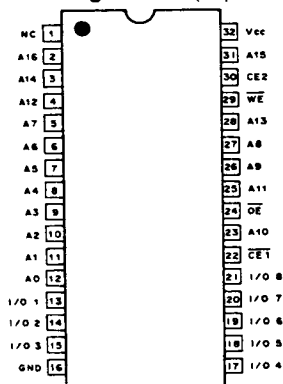Block Diagram**Pin Configuration (Top View)****Pin Description**

Symbol	Description
A0 to A16	Address input
I/O1 to I/O8	Data input output
$\overline{CE}1, CE2$	Chip enable 1, 2 input
$\overline{WE}$	Write enable input
$\overline{OE}$	Output enable input
Vcc	Power supply
GND	Ground
NC	No connection

252

SONY reserves the right to change products and specifications without notice.
This information does not convey any license under patent rights of SONY corporation or others.

E89322C06 - ST

Absolute Maximum Ratings

(Ta=25°C, GND=0V)

Item	Symbol	Rating	Unit
Supply voltage	V _{CC}	− 0.5 to +7.0	V
Input voltage	V _{IN}	− 0.5 * to V _{CC} +0.5	V
Input and output voltage	V _{IO}	− 0.5 * to V _{CC} +0.5	V
Allowable power dissipation	P _D	CXK581000P 1.0	W
		CXK581000M 0.7	
Operating temperature	T _{opr}	0 to +70	°C
Storage temperature	T _{stg}	− 55 to +150	°C
Soldering temperature	T _{solder}	260•10	°C • sec

* V_{IN}, V_{IO} = − 3.0V Min. for pulse width less than 50ns.

Truth Table

CE1	CE2	OE	WE	Mode	I/O pin	V _{CC} current
H	X	X	X	Not selected	High Z	I _{SB1} , I _{SB2}
X	L	X	X	Not selected	High Z	I _{SB1} , I _{SB2}
L	H	H	H	Output disable	High Z	I _{CC1} , I _{CC2} , I _{CC3}
L	H	L	H	Read	Data out	I _{CC1} , I _{CC2} , I _{CC3}
L	H	X	L	Write	Data in	I _{CC1} , I _{CC2} , I _{CC3}

X : "H" or "L"

DC Recommended Operating Conditions (Ta=0 to +70°C, GND=0V)

Item	Symbol	Min.	Typ.	Max.	Unit
Supply voltage	V _{CC}	4.5	5.0	5.5	V
Input high voltage	V _{IH}	2.2	—	V _{CC} +0.3	V
Input low voltage	V _{IL}	− 0.3 *	—	0.8	V

* V_{IL} = − 3.0V Min. for pulse width less than 50ns.

Electrical Characteristics

• DC characteristics

(V_{CC}=5V ± 10%, GND=0V, T_a=0 to +70 °C)

Item	Symbol	Test conditions		- 10L/12L/15L			- 10LL/12LL/15LL			Unit
				Min.	Typ. *	Max.	Min.	Typ. *	Max.	
Input leakage current	I _{LI}	V _{IN} =GND to V _{CC}		- 1	—	1	- 1	—	1	μA
Output leakage current	I _{LO}	CE1=V _{IH} or CE2=V _{IL} or OE=V _{IH} or WE=V _{IL} V _{I/O} =GND to V _{CC}		- 1	—	1	- 1	—	1	μA
Operating power supply current	I _{CC1}	CE1=V _{IL} , CE2=V _{IH} V _{IN} =V _{IH} or V _{IL} I _{OUT} =0mA		—	7	15	—	7	15	mA
Average operating current	I _{CC2}	Min. cycle Duty=100% I _{OUT} =0mA	Write cycle	—	35	60	—	35	60	mA
			Read cycle	—	25	40	—	25	40	
	I _{CC3}	Cycle time 1 μs Duty=100% I _{OUT} =0mA CE1 ≤ 0.2V, CE2 ≥ V _{CC} - 0.2V V _{IL} ≤ 0.2V, V _{IH} ≥ V _{CC} - 0.2V	Write cycle	—	10	20	—	10	20	mA
			Read cycle	—	5	10	—	5	10	
Standby current	I _{SB1}	CE2 ≤ 0.2V or CE1 ≥ V _{CC} - 0.2V CE2 ≥ V _{CC} - 0.2V	0 to 70 °C	—	—	100	—	—	20	μA
			0 to 40 °C	—	—	20	—	—	4	
			+25 °C	—	2	8	—	0.7	2	
	I _{SB2}	CE1=V _{IH} or CE2=V _{IL}	—	0.6	3	—	0.6	3	mA	
Output high voltage	V _{OH}	I _{OH} = - 1.0mA		2.4	—	—	2.4	—	—	V
Output low voltage	V _{OL}	I _{OL} =2.1mA		—	—	0.4	—	—	0.4	V

* V_{CC}=5V, T_a=25 °C

I/O capacitance

(T_a=25 °C, f=1MHz)


Item	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Input capacitance	C _{IN}	V _{IN} =0V	—	—	6	pF
I/O capacitance	C _{I/O}	V _{I/O} =0V	—	—	8	pF

Note) This parameter is sampled and is not 100% tested.

AC characteristics**• AC test conditions** ($V_{CC}=5V \pm 10\%$, $T_a=0$ to $+70^\circ\text{C}$)

Item	Conditions
Input pulse high level	$V_{IH}=2.2V$
Input pulse low level	$V_{IL}=0.8V$
Input rise time	$t_r=5ns$
Input fall time	$t_f=5ns$
Input and output reference level	1.5V
Output load conditions	$C_L^* = 100pF$, 1TTL

* C_L includes scope and jig capacitances.

• Test circuit

• Read cycle ($\overline{WE}$ ="H")

Item	Symbol	– 10L/10LL		– 12L/12LL		– 15L/15LL		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
Read cycle time	t _{RC}	100	—	120	—	150	—	ns
Address access time	t _{AA}	—	100	—	120	—	150	ns
Chip enable access time ($\overline{CE1}$)	t _{CO1}	—	100	—	120	—	150	ns
Chip enable access time (CE2)	t _{CO2}	—	100	—	120	—	150	ns
Output enable to output valid	t _{OE}	—	50	—	60	—	70	ns
Output hold from address change	t _{OH}	15	—	15	—	15	—	ns
Chip enable to output in low Z ($\overline{CE1}$, CE2)	t _{LZ1} , t _{LZ2}	10	—	10	—	10	—	ns
Output enable to output in low Z ($\overline{OE}$)	t _{OLZ}	5	—	5	—	5	—	ns
Chip disable to output in high Z ($\overline{CE1}$, CE2)	t _{HZ1} *, t _{HZ2} *	—	35	—	40	—	50	ns
Output disable to output in high Z ($\overline{OE}$)	t _{OHZ} *	—	35	—	40	—	50	ns

* t_{HZ1}, t_{HZ2} and t_{OHZ} are defined as the time required for outputs to turn to high impedance state and are not referred to as output voltage levels.


• Write cycle

Item	Symbol	– 10L/10LL		– 12L/12LL		– 15L/15LL		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
Write cycle time	t _{WC}	100	—	120	—	150	—	ns
Address valid to end of write	t _{AW}	70	—	85	—	100	—	ns
Chip enable to end of write	t _{CW}	70	—	85	—	100	—	ns
Data to write time overlap	t _{DW}	40	—	50	—	60	—	ns
Data hold from write time	t _{DH}	0	—	0	—	0	—	ns
Write pulse width	t _{WP}	70	—	80	—	90	—	ns
Address setup time	t _{AS}	0	—	0	—	0	—	ns
Write recovery time ($\overline{WE}$)	t _{WR}	0	—	0	—	0	—	ns
Write recovery time ($\overline{CE1}$, CE2)	t _{WR1}	0	—	0	—	0	—	ns
Output active from end of write	t _{OW}	10	—	10	—	10	—	ns
Write to output in high Z	t _{WHZ} *	—	30	—	30	—	30	ns


* t_{WHZ} is defined as the time required for outputs to turn to high impedance state and is not referred to as output voltage level.

Timing Waveform


- Read cycle (1) : $\overline{CE1}=\overline{OE}=V_{IL}$, $CE2=V_{IH}$, $\overline{WE}=V_{IH}$

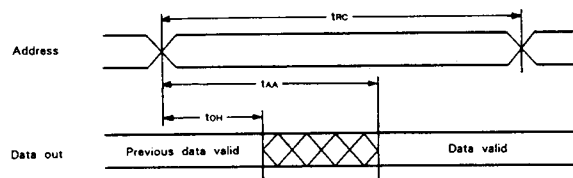


- Read cycle (2) : $\overline{WE}=V_{IH}$

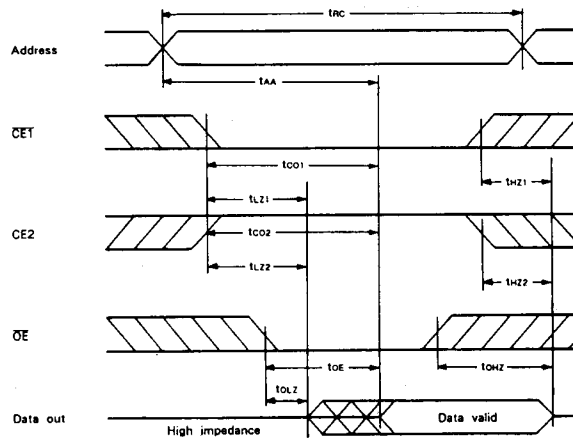


- Write cycle (1) : $\overline{WE}$ control

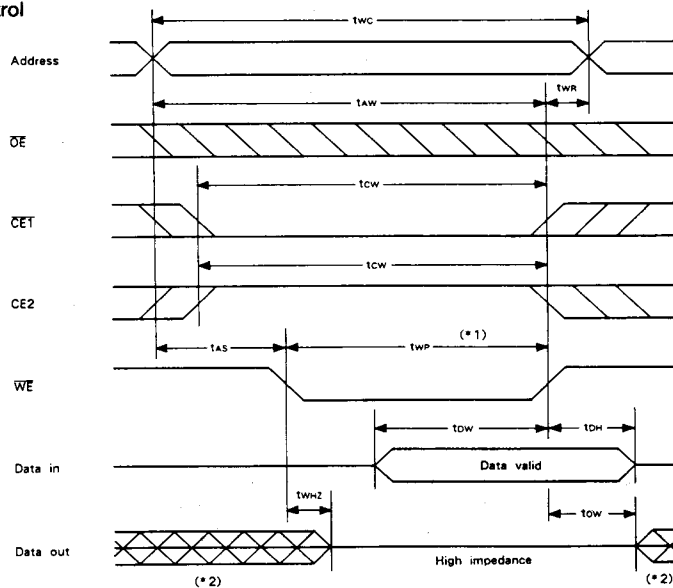

- Write cycle (2) : $\overline{CE1}$ control

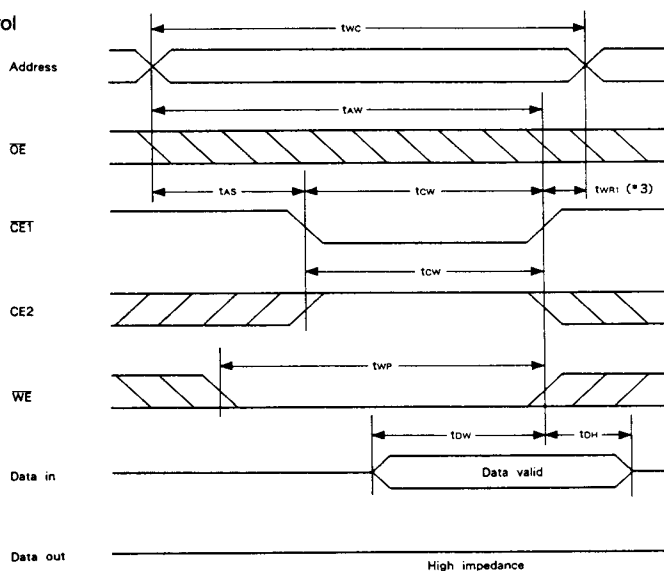

- **Write cycle (3) : CE2 control**

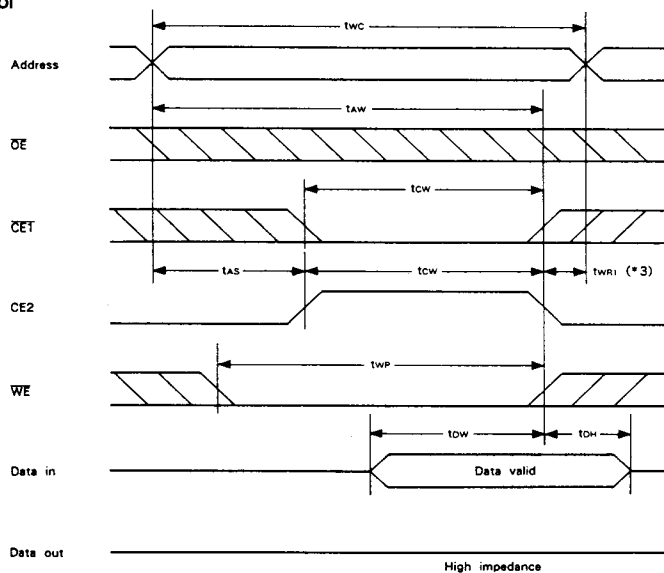

Note)

- *1. Write is executed when both $\overline{\text{CE1}}$ and $\overline{\text{WE}}$ are at low and CE2 is at high simultaneously.
- *2. Do not apply the data input voltage of the opposite phase to the output while I/O pin is in output condition.
- *3. t_{WR1} is tested from either the rising edge of $\overline{\text{CE1}}$ or the falling edge of CE2, whichever comes earlier, until the end of the write cycle.

Data Retention Characteristics


(Ta=0 to 70 °C)

Item	Symbol	Test conditions		- 10L/12L/15L			- 10LL/12LL/15LL			Unit
				Min.	Typ.	Max.	Min.	Typ.	Max.	
Data retention voltage	V _{DR}	* 1		2.0	—	5.5	2.0	—	5.5	V
Data retention current	I _{CCDR1}	V _{CC} =3.0V * 1	0 to 70 °C	—	—	50	—	—	12	μA
			0 to 40 °C	—	—	10	—	—	2.4	
			+25 °C	—	1	4	—	0.4	1.2	
	I _{CCDR2}	V _{CC} =2.0 to 5.5V * 1		—	2	100	—	0.7	20	mA
Data retention setup time	t _{CDRS}	Chip disable to data retention mode		0	—	—	0	—	—	ns
Recovery time	t _R			t _{RC} * 2	—	—	t _{RC} * 2	—	—	ns


- Note)
- * 1. $\overline{CE1} \geq V_{CC} - 0.2V$, $CE2 \geq V_{CC} - 0.2V$ ($\overline{CE1}$ control) or $CE2 \leq 0.2V$ ($CE2$ control)
 - * 2. t_{RC} : Read cycle time

Data retention waveform

- Low supply voltage data retention waveform (1) ($\overline{CE1}$ control)

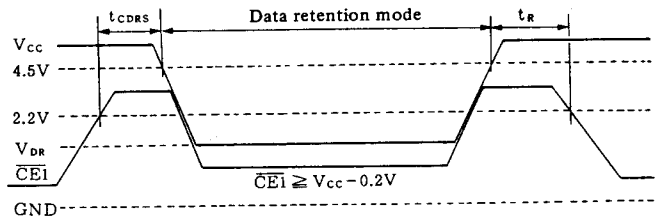


- Low supply voltage data retention waveform (2) ($CE2$ control)

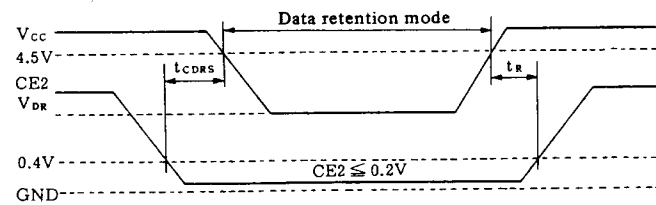


Example of Representative Characteristics


Supply current vs. Supply voltage

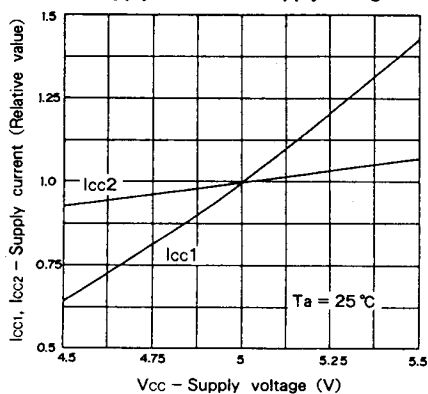


Supply current vs. Ambient temperature

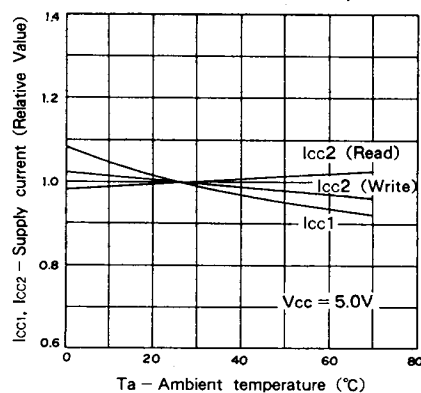


Supply current vs. Frequency

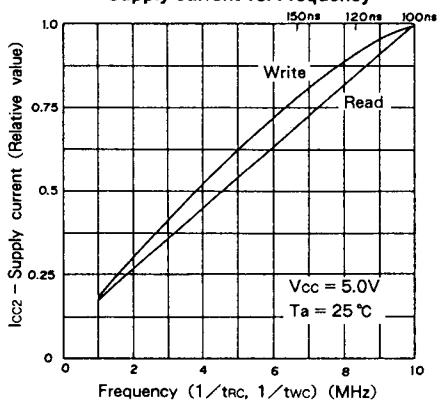


Access time vs. Load capacity

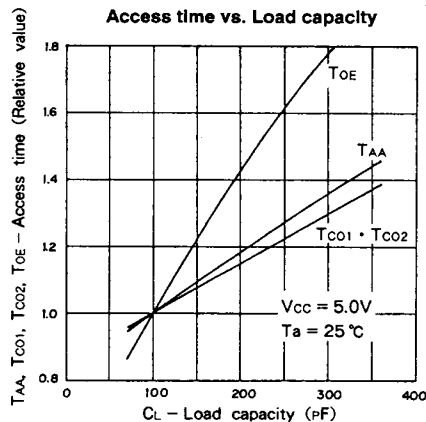


Access time vs. Supply voltage

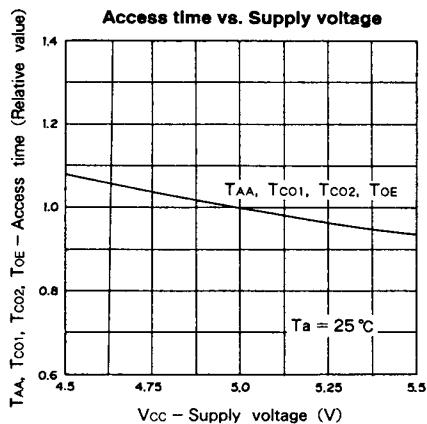


Access time vs. Ambient temperature

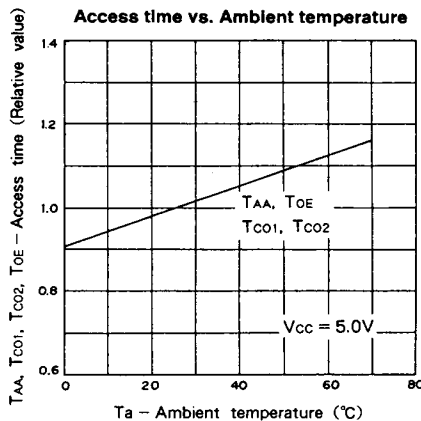


Standby current vs. Supply voltage

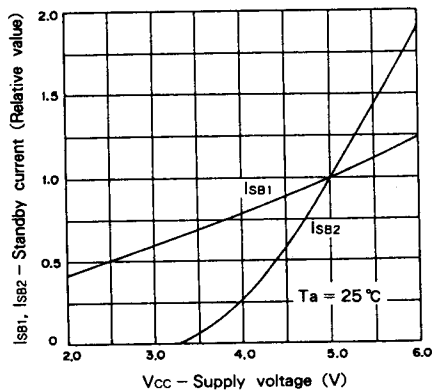


Standby current vs. Ambient temperature

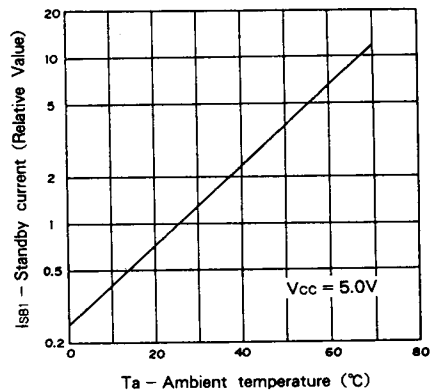


Input voltage level vs. Supply voltage

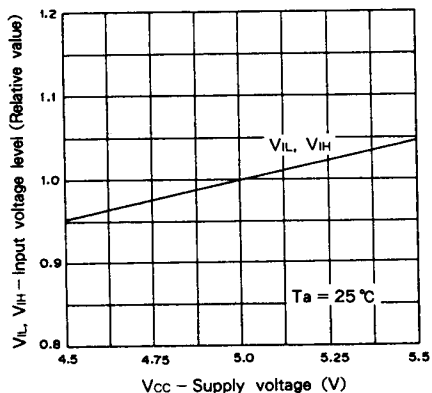


Standby current vs. Ambient temperature

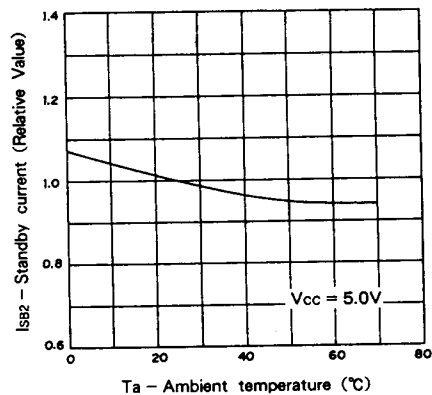

Output current vs. Output voltage

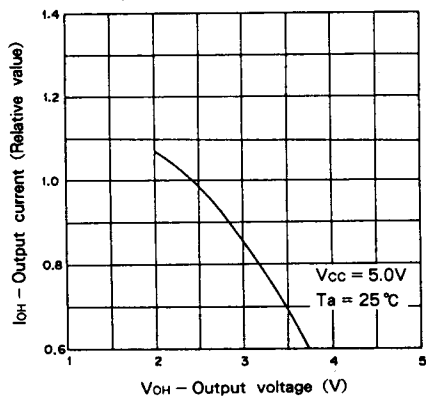


Output current vs. Output voltage

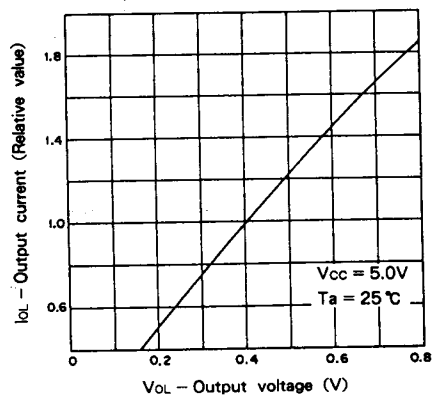

Package Outline Unit : mm

CXK581000P 32Pin DIP (Plastic) 600mil 4.5g

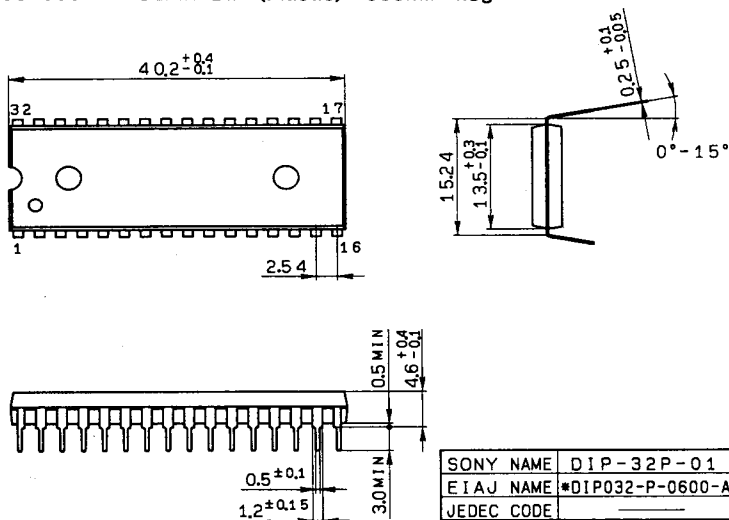

CXK581000M 32Pin SOP (Plastic) 525mil 1.2g

