

### FEATURES

- Planar Structure
- High Responsivity
- Low Dark Current
- Dielectric Passivation
- 100% Purge Burn-in

### APPLICATIONS

- 1.25Gb/s and 2.5Gb/s Optical Receivers
- Gigabit Ethernet and OC-48 / STM-16
- Test and Measurement
- Analog Communication Systems



PD070-003-0xx  
Ceramic Sub-Mount



PD070-003-1xx  
TO can Package



PD070-003-3xx  
SC/APC Pigtail



PD070-003-5xx  
FC Receptacle

### PRODUCT DESCRIPTION

The PD070 is an InGaAs photodiode with a photosensitive region 70 $\mu$ m in diameter. It is intended for use in high speed, low noise communication systems, such as 1.25Gb/s or 2.5Gb/s optical receivers and for use in optical test and measurement equipment. Planar semiconductor design and dielectric passivation provide low noise performance.

Reliability is assured by hermetic sealing and 100% purge burn-in (200 $^{\circ}$ C, 15 hours,  $V_r = 20V$ ). The device can be assembled on a ceramic sub-mount or in a TO can. It can be pigtailed with SC, FC or ST connectors (UPC or APC). It can also be mounted in an SC, ST or FC receptacle. Custom packages are an option.

### ELECTRICAL CHARACTERISTICS

Table 1: Electrical Specifications

PARAMETER	MIN	TYP	MAX	UNIT
Dark Current ( $I_D$ )	-	0.1	1.0	nA
Capacitance (Ceramic sub-mount) <sup>(1)</sup>	-	0.4	0.5	pF
Capacitance (Receptacle, Pigtail, TO can) <sup>(1)</sup>	-	0.6	0.7	pF
Responsivity at 1310nm (Ceramic sub-mount)	0.80	0.90	-	A/W
Responsivity at 1550nm (Ceramic sub-mount)	0.85	0.95	-	A/W
Responsivity at 1310nm (Receptacle, Pigtail, TO can)	0.80	0.85	-	A/W
Responsivity at 1550nm (Receptacle, Pigtail, TO can)	0.85	0.90	-	A/W
3dB bandwidth (50 $\Omega$ ) (Ceramic sub-mount) <sup>(1)</sup>	5300	6600	-	MHz
3dB bandwidth (50 $\Omega$ ) (Receptacle, Pigtail, TO can) <sup>(1)</sup>	3800	4400	-	MHz
Optical Return Loss (Pigtail using SMF-28)	50	55	-	dB
Optical Return Loss (Receptacle, APC connector)	40	45	-	dB
Operating voltage	-	5	20	V


(1) 5V bias voltage

**Table 2: Absolute Maximum Ratings**

PARAMETER	MIN	MAX	UNIT
Forward Current	-	5	mA
Reverse Current	-	250	μA
Reverse Voltage	-	30	V
Optical input power	-	5	mW
Operating Case Temperature	-40	+85	°C
Storage Temperature	-40	+85	°C
Soldering temperature (10 seconds)	-	+250	°C

Stresses in excess of the absolute ratings may cause permanent damage. Functional operation is not implied under these conditions. Exposure to absolute ratings for extended periods of time may adversely affect reliability.

**PACKAGE DIMENSIONS – PD070-003-100 and PD070-003-105**

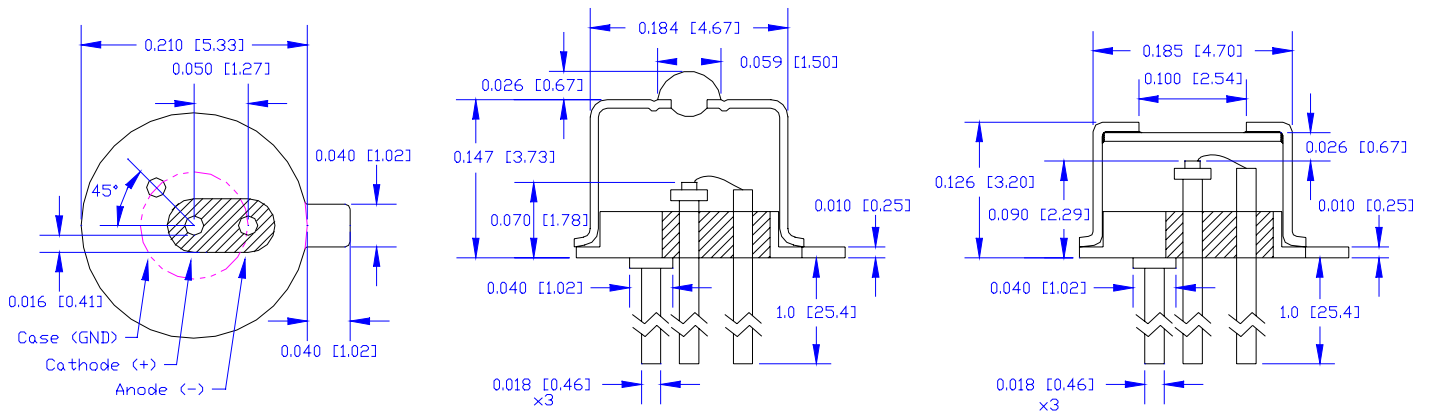

Dimensions: INCHES [mm]

**ORDERING INFORMATION**

**Table 3: Standard**

Part Number	Options
PD070-003-100	TO46, 3pin, non AR coated, gold plated lens cap
PD070-003-105	TO46, 3pin, non AR coated, gold plated flat window cap

**Table 4: Custom**

Part Number	Options
PD070-003-0xx	Custom defined size and electrical layout.
PD070-003-1xx	Package: TO46, TO56, 2 or 3 pin. Cap: Window or lens. AR or Non-AR coated. Gold or nickel plated.
PD070-003-3xx	Pigtailed: TO46, 2 or 3 pin. Fiber length, 0.5 meter, 1.0 meter Fiber type: Multimode, single mode (SMF-28) or custom supplied Connector Type: SC, ST or FC. APC or UPC
PD070-003-5xx	Receptacle, 2 or 3 pin. SC, ST or FC aligned

Please contact Anadigics for the specific part number and pinout that suits your needs

**ANADIGICS, Inc.**  
 829 Flynn Road  
 Camarillo, California 93012, U.S.A.  
 Tel: +1 (805) 445-4500  
 Fax: +1 (805) 445-4502  
 URL: <http://www.anadigics.com>  
 E-mail: [Mktg@anadigics.com](mailto:Mktg@anadigics.com)

**IMPORTANT NOTICE**

ANADIGICS, Inc. reserves the right to make changes to its products or discontinue any product at any time without notice. The product specifications contained in Advanced Product Information sheets and Preliminary Data sheets are subject to change prior to a product's formal introduction. Information in Data Sheets have been carefully checked and are assumed to be reliable; however, ANADIGICS assumes no responsibility for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

**WARNING**

ANADIGICS products are not intended for use in life support appliances, devices, or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.