

REVISIONS																				
LTR	DESCRIPTION										DATE (YR-MO-DA)					APPROVED				
A	Changes in accordance with NOR 5962-R098-96.										96-04-09					M. A. Frye				
B	Changes in accordance with NOR 5962-R127-97.										96-11-19					M. A. Frye				
C	Add device type 03. Update boilerplate. Editorial changes throughout.										97-03-26					R. Monnin				

REV	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C					
SHEET	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49					
REV	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
SHEET	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34

REV STATUS OF SHEETS	REV			C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C
	SHEET			1	2	3	4	5	6	7	8	9	10	11	12	13	14			

PMIC N/A	PREPARED BY Jeff Bowling	DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316			
STANDARD MICROCIRCUIT DRAWING THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE AMSC N/A	CHECKED BY Jeff Bowling			MICROCIRCUIT, MEMORY, DIGITAL, CMOS, 256K X 16 MULTIPORT VIDEO RAM, MONOLITHIC SILICON	
	APPROVED BY Michael A. Frye	SIZE A CAGE CODE 67268 5962-95643			
	DRAWING APPROVAL DATE 96-02-22				
	REVISION LEVEL C				

DSCC FORM 2233

APR 97

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


5962-E089-97

9004708 0028561 551

1. SCOPE

1.1 Scope. This drawing documents two product assurance class levels consisting of high reliability (device classes Q and M) and space application (device class V). A choice of case outlines and lead finishes are available and are reflected in the Part or Identifying Number (PIN). When available, a choice of Radiation Hardness Assurance (RHA) levels are reflected in the PIN.

1.2 PIN. The PIN is as shown in the following example:

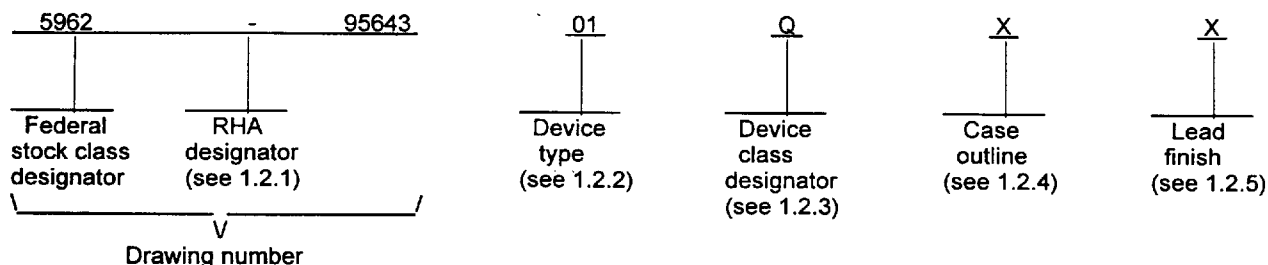

1.2.1 RHA designator. Device classes Q and V RHA marked devices meet the MIL-PRF-38535 specified RHA levels and are marked with the appropriate RHA designator. Device class M RHA marked devices meet the MIL-PRF-38535, appendix A specified RHA levels and are marked with the appropriate RHA designator. A dash (-) indicates a non-RHA device.

1.2.2 Device types. The device types identify the circuit function as follows:

Device type	Generic number 1/	Circuit function	Access time
01	55161	256K x 16-bit multiport video RAM	80 ns
02	55161	256K x 16-bit multiport video RAM	70 ns
03	55161	256K x 16-bit multiport video RAM	75 ns

1.2.3 Device class designator. The device class designator is a single letter identifying the product assurance level as follows:

Device class	Device requirements documentation
M	Vendor self-certification to the requirements for MIL-STD-883 compliant, non-JAN class level B microcircuits in accordance with MIL-PRF-38535, appendix A
Q or V	Certification and qualification to MIL-PRF-38535

1.2.4 Case outlines. The case outlines are as designated in MIL-STD-1835 and as follows:

Outline letter	Descriptive designator	Terminals	Package style
X	CMGA1-68	68	Pin grid array
Y	See figure 1	64	Flatpack with tie bar

1.2.5 Lead finish. The lead finish is as specified in MIL-PRF-38535 for device classes Q and V or MIL-PRF-38535, appendix A for device class M.

1/ Generic numbers are listed on the Standard Microcircuit Drawing Source Approval Bulletin at the end of this document and will also be listed in QML-38535 (see 6.6.1 herein).

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 2

1.3 Absolute maximum ratings. 2/ 3/

Supply voltage range (V_{CC})	-1.0 V dc to +7.0 V dc
Input voltage range	-1.0 V dc to +7.0 V dc
DC short circuit output current	50 mA
Storage temperature range	-65°C to +150°C
Maximum power dissipation (P_D)	1.1 W
Lead temperature (soldering, 10 seconds)	+260°C
Thermal resistance, junction-to-case (θ_{JC}):	
Case X	See MIL-STD-1835
Case Y	15°C/W
Junction temperature (T_J)	+175°C

1.4 Recommended operating conditions.

Supply voltage (V_{CC})	4.5 V dc to 5.5 V dc
Supply voltage (V_{SS})	0 V
Input high voltage (V_{IH})	2.4 V dc minimum to 6.5 V dc maximum
Input low voltage (V_{IL})	-1 V dc minimum to 0.8 V dc maximum
Case operating temperature range (T_C)	-55°C to +125°C

1.5 Digital logic testing for device classes Q and V.

Fault coverage measurement of manufacturing logic tests (MIL-STD-883, test method 5012)	4/ percent
---	------------

2. APPLICABLE DOCUMENTS

2.1 **Government specification, standards, and handbooks.** The following specification, standards, and handbooks form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATION

MILITARY

MIL-PRF-38535 - Integrated Circuits, Manufacturing, General Specification for.

STANDARDS

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.
MIL-STD-973 - Configuration Management.
MIL-STD-1835 - Microcircuit Case Outlines.

HANDBOOKS

MILITARY

MIL-HDBK-103 - List of Standard Microcircuit Drawings (SMD's).
MIL-HDBK-780 - Standard Microcircuit Drawings.

(Unless otherwise indicated, copies of the specification, standards, and handbooks are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

- 2/ Stresses above the absolute maximum rating may cause permanent damage to the device. Extended operation at the maximum levels may degrade performance and affect reliability.
3/ All voltage values in this specification are with respect to V_{SS} .
4/ Values will be added when they become available.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 3

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM Standard F1192-88 - Standard Guide for the Measurement of Single Event Phenomena from Heavy Ion Irradiation of Semiconductor Devices.

(Applications for copies of ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

ELECTRONICS INDUSTRIES ASSOCIATION (EIA)

JEDEC Standard No. 17 - A Standardized Test Procedure for the Characterization of Latch-up in CMOS Integrated Circuits.

(Applications for copies should be addressed to the Electronics Industries Association, 2500 Wilson Boulevard, Arlington, VA 22201.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Item requirements. The individual item requirements for device classes Q and V shall be in accordance with MIL-PRF-38535 and as specified herein or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein. The individual item requirements for device class M shall be in accordance with MIL-PRF-38535, appendix A for non-JAN class level B devices and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535 and herein for device classes Q and V or MIL-PRF-38535, appendix A and herein for device class M.

3.2.1 Case outlines. The case outlines shall be in accordance with 1.2.4 herein and figure 1.

3.2.2 Terminal connections. The terminal connections shall be as specified on figure 2.

3.2.3 Truth table. The truth table shall be as specified on figure 3.

3.3 Electrical performance characteristics and postirradiation parameter limits. Unless otherwise specified herein, the electrical performance characteristics and postirradiation parameter limits are as specified in table I and shall apply over the full case operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table IIA. The electrical tests for each subgroup are defined in table I.

3.5 Marking. The part shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's PIN may also be marked as listed in MIL-HDBK-103. For packages where marking of the entire SMD PIN number is not feasible due to space limitations, the manufacturer has the option of not marking the "5962-" on the device. For RHA product using this option, the RHA designator shall still be marked. Marking for device classes Q and V shall be in accordance with MIL-PRF-38535. Marking for device class M shall be in accordance with MIL-PRF-38535, appendix A.

3.5.1 Certification/compliance mark. The certification mark for device classes Q and V shall be a "QML" or "Q" as required in MIL-PRF-38535. The compliance mark for device class M shall be a "C" as required in MIL-PRF-38535, appendix A.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 4

3.6 Certificate of compliance. For device classes Q and V, a certificate of compliance shall be required from a QML-38535 listed manufacturer in order to supply to the requirements of this drawing (see 6.6.1 herein). For device class M, a certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-HDBK-103 (see 6.6.2 herein). The certificate of compliance submitted to DSCC-VA prior to listing as an approved source of supply for this drawing shall affirm that the manufacturer's product meets, for device classes Q and V, the requirements of MIL-PRF-38535 and herein or for device class M, the requirements of MIL-PRF-38535, appendix A and herein.

3.7 Certificate of conformance. A certificate of conformance as required for device classes Q and V in MIL-PRF-38535 or for device class M in MIL-PRF-38535, appendix A shall be provided with each lot of microcircuits delivered to this drawing.

3.8 Notification of change for device class M. For device class M, notification to DSCC-VA of change of product (see 6.2 herein) involving devices acquired to this drawing is required for any change as defined in MIL-STD-973.

3.9 Verification and review for device class M. For device class M, DSCC, DSCC's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

3.10 Microcircuit group assignment for device class M. Device class M devices covered by this drawing shall be in microcircuit group number 41 (see MIL-PRF-38535, appendix A).

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. For device classes Q and V, sampling and inspection procedures shall be in accordance with MIL-PRF-38535 or as modified in the device manufacturer's Quality Management (QM) plan. The modification in the QM plan shall not affect the form, fit, or function as described herein. For device class M, sampling and inspection procedures shall be in accordance with MIL-PRF-38535, appendix A.

4.2 Screening. For device classes Q and V, screening shall be in accordance with MIL-PRF-38535, and shall be conducted on all devices prior to qualification and technology conformance inspection. For device class M, screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection.

4.2.1 Additional criteria for device class M.

- a. Delete the sequence specified as initial (preburn-in) electrical parameters through interim (postburn-in) electrical parameters of method 5004 and substitute lines 1 through 6 of table IIA herein.
- b. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015.

(1) Dynamic burn-in (method 1015 of MIL-STD-883, test condition D; for circuit, see 4.2.1b herein).

- c. Interim and final electrical parameters shall be as specified in table IIA herein.

4.2.2 Additional criteria for device classes Q and V.

- a. The burn-in test duration, test condition and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The burn-in test circuit shall be maintained under document revision level control of the device manufacturer's Technology Review Board (TRB) in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1015 of MIL-STD-883.
- b. Interim and final electrical test parameters shall be as specified in table IIA herein.
- c. Additional screening for device class V beyond the requirements of device class Q shall be as specified in MIL-PRF-38535, appendix B.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 5

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions 1/ -55°C ≤ T _C ≤ +125°C 4.5 V ≤ V _{CC} ≤ 5.5 V unless otherwise specified		Group A subgroups	Device type	Limit		Unit
						Min	Max	
Input leakage current	I _{LI}	0.0 V ≤ V _{IN} ≤ 5.8 V, All other pins at 0 V to V _{CC} , V _{CC} = 5.5 V		1,2,3	All	-10	+10	μA
Output leakage current 2/	I _{LO}	OE ≥ V _{IH} , 0.0 ≤ V _{OUT} ≤ V _{CC} V _{CC} = 5.5 V		1,2,3	All	-10	+10	μA
Output high voltage	V _{OH}	I _{OH} = -1 mA		1,2,3	All	2.4		V
Output low voltage	V _{OL}	I _{OL} = 2 mA		1,2,3	All		0.4	V
Operating supply current 4/	I _{CC1}	3/	SAM port standby	1,2,3	01		160	mA
					02,03		165	
	I _{CC1A}	t _c (SC) = Min	SAM port active		01		195	
					02,03		210	
Standby supply current	I _{CC2}	All clocks = V _{CC}	SAM port standby	1,2,3	All		12	mA
	I _{CC2A}	t _c (SC) = Min	SAM port active		01		65	
					02,03		70	
RAS-only refresh supply current	I _{CC3}	3/	SAM port standby	1,2,3	01		160	mA
					02,03		165	
	I _{CC3A}	t _c (SC) = Min 3/	SAM port active		01		195	
					02,03		215	
Page-mode supply current 4/	I _{CC4}	t _c (P) = Min 5/	SAM port standby	1,2,3	01		95	mA
					02,03		100	
	I _{CC4A}	t _c (SC) = Min 5/	SAM port active		01		130	
					02,03		145	
CAS-before-RAS supply current	I _{CC5}	3/	SAM port standby	1,2,3	01		160	mA
					02,03		165	
	I _{CC5A}	t _c (SC) = Min 3/	SAM port active		01		195	
					02,03		210	

See footnotes at end of table.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000

SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
6

TABLE I. Electrical performance characteristics - continued.

Test	Symbol/ altern. symbol	Conditions 1/ -55°C ≤ T _C ≤ +125°C 4.5 V ≤ V _{CC} ≤ 5.5 V unless otherwise specified		Group A subgroups	Device type	Limit		Unit
						Min	Max	
Data-transfer supply current	I _{CC6}	3/	SAM port standby	1,2,3	01		170	mA
					02,03		180	
	I _{CC6A}	t _{c(SC)} = Min	SAM port active		01		200	
					02,03		225	
Input capacitance 8/	C _{IN}	f = 1.0 MHz, T _A = +25°C, see 4.4.1e		4	All		10	pF
Output capacitance, SQ and DQ 8/	C _{OUT1}	f = 1.0 MHz, T _A = +25°C, see 4.4.1e		4	All		15	pF
Output capacitance, QSF 8/	C _{OUT2}	f = 1.0 MHz, T _A = +25°C, see 4.4.1e		4	All		12	pF
Functional tests		See 4.4.1c		7,8A,8B	All			
Access time from CAS	t _{a(C)} t _{CAC}	t _{d(RLCL)} = Max, See figure 4 7/		9,10,11	All		20	ns
Access time from column address	t _{a(CA)} t _{AA}	t _{d(RLCL)} = Max See figure 4 7/		9,10,11	01		40	ns
					02		35	
					03		38	
Access time from CAS high	t _{a(CP)} t _{CPA}	t _{d(RLCL)} = Max See figure 4 7/		9,10,11	01		45	ns
					02		40	
					03		43	
Access time from RAS	t _{a(R)} t _{RAC}	t _{d(RLCL)} = Max See figure 4 7/		9,10,11	01		80	ns
					02		70	
					03		75	
Access time of DQ from TRG low	t _{a(G)} t _{OEA}	See figure 4 7/		9,10,11	All		20	ns
Access time of SQ from SC high	t _{a(SQ)} t _{SCA}	See figure 4 C _L = 30 pF 7/		9,10,11	01		25	ns
					02		20	
					03		23	
Access time of SQ from SE low	t _{a(SE)} t _{SEA}	See figure 4 C _L = 30 pF 7/		9,10,11	01		20	ns
					02		15	
					03		18	
Disable time, random output from CAS high 8/	t _{dis(CH)} t _{OFF}	See figure 4, C _L = 50 pF 7/		9,10,11	All	0	20	ns
Disable time, random output from RAS high 8/	t _{dis(RH)}	See figure 4, C _L = 50 pF 7/		9,10,11	All	0	20	ns

See footnotes at end of table.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000

SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
7

TABLE I. Electrical performance characteristics - continued.

Test	Symbol/ altern. symbol	Conditions -55°C ≤ T _C ≤ +125°C 4.5 V ≤ V _{CC} ≤ 5.5 V unless otherwise specified	Group A subgroups	Device type	Limit		Unit
					Min	Max	
Disable time, random output from TRG high 8/	t _{dis(G)} t _{OEZ}	See figure 4, C _L = 50 pF 7/	9,10,11	All	0	20	ns
Disable time, random output from WEX low 8/	t _{dis(WL)} t _{WEZ}	See figure 4, C _L = 50 pF 7/	9,10,11	All	0	25	ns
Disable time, serial output from SE high 8/	t _{dis(SE)} t _{SEZ}	See figure 4 C _L = 30 pF 7/	9,10,11	01	0	20	ns
				02	0	15	
				03	0	18	
Cycle time, read	t _{c(RD)} t _{RC}	Timing measurements are referenced to V _{IL} max and V _{IH} min. See figure 4 7/	9,10,11	01	150		ns
				02	130		
				03	140		
Cycle time, write	t _{c(W)} t _{WC}		9,10,11	01	150		ns
				02	130		
				03	140		
Cycle time, read-modify-write	t _{c(rdW)} t _{RMW}		9,10,11	01	200		ns
				02	175		
				03	188		
Cycle time, page-mode read, write	t _{c(P)} t _{PC}		9,10,11	01	50		ns
				02	45		
				03	48		
Cycle time, page-mode read- modify-write	t _{c(RDWP)} t _{PRMW}		9,10,11	01	90		ns
				02	85		
				03	88		
Cycle time, transfer read	t _{c(TRD)} t _{RC}		9,10,11	01	150		ns
				02	130		
				03	140		
Cycle time, serial clock 9/	t _{c(SC)} t _{SCC}		9,10,11	01	30		ns
				02	22		
				03	24		
Pulse duration, CAS high	t _{w(CH)} t _{CPN}		9,10,11	All	10		ns
Pulse duration, CAS low 10/	t _{w(CL)} t _{CAS}		9,10,11	All	20		ns
						10	μs
Pulse duration, RAS high	t _{w(RH)} t _{RP}		9,10,11	01	60		ns
				02	50		
				03	55		

See footnotes at end of table.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000

SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
8

TABLE I. Electrical performance characteristics - continued.

Test	Symbol/ altern. symbol	Conditions -55°C ≤ T _C ≤ +125°C 4.5 V ≤ V _{CC} ≤ 5.5 V unless otherwise specified	Group A subgroups	Device type	Limit		Unit
					Min	Max	
Pulse duration, RAS low 11/	t _{w(RL)} t _{RAS}	Timing measurements are referenced to V _{IL} max and V _{IH} min. See figure 4 7/	9,10,11,	01	80		ns
				02	70		
				03	75		
				All		10	
Pulse duration, WEX low	t _{w(WL)} t _{WP}		9,10,11	01	15		ns
				02	10		
				03	13		
Pulse duration, TRG low	t _{w(TRG)}		9,10,11	All	20		ns
Pulse duration, SC high	t _{w(SCH)} t _{SC}		9,10,11	01	10		ns
				02	8		
				03	9		
Pulse duration, SC low	t _{w(SCL)} t _{SCP}		9,10,11	01	10		ns
				02	8		
				03	9		
Pulse duration, TRG high	t _{w(GH)} t _{TP}		9,10,11	All	20		ns
Pulse duration, RAS low (page mode)	t _{w(RL)P} t _{RASP}		9,10,11	01	80		ns
				02	70		
				03	75		
				All		100	
Setup time, column address before CAS low	t _{su(CA)} t _{ASC}		9,10,11	All	0		ns
Setup time, DSF before CAS low	t _{su(SFC)} t _{FSC}		9,10,11	All	0		ns
Setup time, row address before RAS low	t _{su(RA)} t _{ASR}		9,10,11	All	0		ns
Setup time, WEX before RAS low	t _{su(WMR)} t _{WSR}		9,10,11	All	0		ns
Setup time, DQ before RAS low	t _{su(DQR)} t _{MS}		9,10,11	All	0		ns
Setup time, TRG high before RAS low	t _{su(TRG)} t _{THS}		9,10,11	All	0		ns
Setup time, DSF low before RAS low	t _{su(SFR)} t _{FSR}		9,10,11	All	0		ns
Setup time, data valid before CAS low	t _{su(DCL)} t _{DSC}		9,10,11	All	0		ns
Setup time, data valid before WEX low	t _{su(DWL)} t _{DSW}		9,10,11	All	0		ns

See footnotes at end of table.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000

SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
9

TABLE I. Electrical performance characteristics - continued.

Test	Symbol/ altern. symbol	Conditions -55°C ≤ T _C ≤ +125°C 4.5 V ≤ V _{CC} ≤ 5.5 V unless otherwise specified	Group A subgroups	Device type	Limit		Unit
					Min	Max	
Setup time, read command, WEX high before CAS low	t _{su(rd)} t _{RCS}	Timing measurements are referenced to V _{IL} max and V _{IH} min. See figure 4 7/	9,10,11	All	0		ns
Setup time, early write command, WEX low before CAS low	t _{su(WCL)} t _{WCS}		9,10,11	All	0		ns
Setup time, WEX low before CAS high, write	t _{su(WCH)} t _{CWL}		9,10,11	01	20		ns
				02	15		
				03	18		
Setup time, WEX low before RAS high, write	t _{su(WRH)} t _{RWL}		9,10,11	All	20		ns
Hold time, column address after CAS low	t _{h(CLCA)} t _{CAH}		9,10,11	01	15		ns
				02	10		
				03	13		
Hold time, DSF after CAS low	t _{h(SFC)} t _{CFH}		9,10,11	All	15		ns
Hold time, row address after RAS low	t _{h(RA)} t _{RAH}		9,10,11	All	10		ns
Hold time, TRG after RAS low	t _{h(TRG)} t _{THH}		9,10,11	All	15		ns
Hold time, write mask after RAS low	t _{h(RWM)} t _{RWH}		9,10,11	All	15		ns
Hold time, DQ after RAS low (write-mask operation)	t _{h(RDQ)} t _{MH}		9,10,11	All	15		ns
Hold time, DSF after RAS low	t _{h(SFR)} t _{RFH}		9,10,11	All	10		ns
Hold time, column address valid after RAS low 12/	t _{h(RLCA)} t _{AR}		9,10,11	01	35		ns
				02	30		
				03	33		
Hold time, data valid after CAS low	t _{h(CLD)} t _{DH}		9,10,11	All	15		ns
Hold time, data valid after RAS low 12/	t _{h(RLD)} t _{DHR}		9,10,11	All	35		ns
Hold time, data valid after WEX low	t _{h(WLD)} t _{DH}		9,10,11	All	15		ns
Hold time, read, WEX high after CAS high 13/	t _{h(CHrd)} t _{RCH}		9,10,11	All	0		ns

See footnotes at end of table.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000

SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
10

TABLE I. Electrical performance characteristics - continued.

Test	Symbol/ altern. symbol	Conditions -55° C ≤ T _C ≤ +125° C 4.5 V ≤ V _{CC} ≤ 5.5 V unless otherwise specified	Group A subgroups	Device type	Limit		Unit
					Min	Max	
Hold time, read, $\overline{WE}x$ high after $\overline{RAS}$ high 13/	t _h (RHrd) t _{RRH}	Timing measurements are referenced to V _{IL} max and V _{IH} min. See figure 4	9,10,11	All	0		ns
Hold time, write, $\overline{WE}x$ low after $\overline{CAS}$ low	t _h (CLW) t _{WCH}		9,10,11	All	15		ns
Hold time, write, $\overline{WE}x$ low after $\overline{RAS}$ low 12/	t _h (RLW) t _{WCR}		9,10,11	All	35		ns
Hold time, TRG high after $\overline{WE}x$ low 14/	t _h (WLG) t _{OEH}		9,10,11	All	10		ns
Hold time, SQ valid after SC high	t _h (SHSQ) t _{SOH}		9,10,11	All	2		ns
Hold time, DSF after $\overline{RAS}$ low	t _h (RSF) t _{FHR}		9,10,11	All	35		ns
Hold time, output valid after $\overline{CAS}$ low	t _h (CLQ) t _{DHC}		9,10,11	All	0		ns
Delay time, $\overline{RAS}$ low to $\overline{CAS}$ high	t _d (RLCH) t _{CSH}		9,10,11	01	80		ns
				02	70		
				03	75		
Delay time, $\overline{RAS}$ low to $\overline{CAS}$ high 15/	t _d (RLCH) t _{CHR}		9,10,11	01	15		ns
				02	10		
				03	13		
Delay time, $\overline{CAS}$ high to $\overline{RAS}$ low	t _d (CHRL) t _{CRP}		9,10,11	All	0		ns
Delay time, $\overline{CAS}$ low to $\overline{RAS}$ high	t _d (CLRH) t _{RSH}		9,10,11	All	20		ns
Delay time, $\overline{CAS}$ low to $\overline{WE}x$ low 16/ 17/	t _d (CLWL) t _{CWD}		9,10,11	01	50		ns
				02	45		
				03	48		
Delay time, $\overline{RAS}$ low to $\overline{CAS}$ low 18/	t _d (RLCL) t _{RCD}		9,10,11	01	20	60	ns
				02,03	20	50	
Delay time, column address valid to $\overline{RAS}$ high	t _d (CARH) t _{RAL}		9,10,11	01	40		ns
				02	35		
				03	38		
Delay time, column address valid to $\overline{CAS}$ high	t _d (CACH) t _{CAL}		9,10,11	01	40		ns
				02	35		
				03	38		

See footnotes at end of table.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000

SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
11

TABLE I. Electrical performance characteristics - continued.

Test	Symbol/ altern. symbol	Conditions -55°C ≤ T _C ≤ +125°C 4.5 V ≤ V _{CC} ≤ 5.5 V unless otherwise specified	Group A subgroups	Device type	Limit		Unit
					Min	Max	
Delay time, RAS low to WEX low <u>16/</u>	t _d (RLWL) t _{RWD}	Timing measurements are referenced to V _{IL} max and V _{IH} min. See figure 4 7/	9,10,11	01	105		ns
				02,03	95		
Delay time, column address valid to WEX low <u>16/</u>	t _d (CAWL) t _{AWD}		9,10,11	01	65		ns
				02	60		
				03	63		
Delay time, CAS low to RAS low <u>15/</u>	t _d (CLRL) t _{CSR}		9,10,11	All	0		ns
Delay time, RAS high to CAS low <u>15/</u>	t _d (RHCL) t _{RPC}		9,10,11	All	0		ns
Delay time, CAS low to TRG high for DRAM read cycles	t _d (CLGH)		9,10,11	All	20		ns
Delay time, TRG high before data applied at DQ	t _d (GHD) t _{OED}		9,10,11	All	15		ns
Delay time, RAS low to TRG high <u>19/</u>	t _d (RLTH) t _{RTH}		9,10,11	01	60		ns
				02	55		
				03	58		
Delay time, RAS low to first SC high after TRG high <u>20/</u>	t _d (RLSH) t _{RSD}		9,10,11	01	80		ns
				02	70		
				03	75		
Delay time, RAS low to column address valid	t _d (RLCA) t _{RAD}		9,10,11	01	15	40	ns
				02,03	15	35	
Delay time, TRG low to RAS high	t _d (GLRH) t _{ROH}		9,10,11	All	20		ns
Delay time, CAS low to first SC high after TRG high <u>20/</u>	t _d (CLSH) t _{CSD}		9,10,11	01	25		ns
				02	20		
				03	23		
Delay time, SC high to TRG high <u>19/ 20/</u>	t _d (SCTR) t _{TSL}		9,10,11	All	5		ns
Delay time, TRG high to RAS high <u>19/</u>	t _d (THRH) t _{TRD}		9,10,11	All	-10		ns
Delay time, TRG high to RAS low <u>21/</u>	t _d (THRL) t _{TRP}		9,10,11	01	60		ns
				02	50		
				03	55		

See footnotes at end of table.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000

SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
12

TABLE I. Electrical performance characteristics - continued.

Test	Symbol/ altern. symbol	Conditions -55°C ≤ T _C ≤ +125°C 4.5 V ≤ V _{CC} ≤ 5.5 V unless otherwise specified	Group A subgroups	Device type	Limit		Unit
					Min	Max	
Delay time, TRG high to SC high 19/	t _d (THSC) t _{TSD}	Timing measurements are referenced to V _{IL} max and V _{IH} min. See figure 4 7/	9,10,11	01	20		ns
				02	15		
				03	18		
Delay time, RAS high to last (most significant) rising edge of SC before boundary switch during split-register transfer read cycles	t _d (RHMS)		9,10,11	All	20		ns
Delay time, CAS low to TRG high in real-time transfer read cycles	t _d (CLTH) t _{CTH}		9,10,11	All	15		ns
Delay time, column address to first SC in early-load transfer read cycles	t _d (CASH) t _{ASD}		9,10,11	01	30		ns
				02	25		
				03	28		
Delay time, column address to TRG high in real-time transfer read cycles	t _d (CAGH) t _{ATH}		9,10,11	All	20		ns
Delay time, data to CAS low	t _d (DCL) t _{DZC}		9,10,11	All	0		ns
Delay time, data to TRG low	t _d (DGL) t _{DZO}		9,10,11	All	0		ns
Delay time, last (most significant) rising edge of SC to RAS low before boundary switch during split-register transfer read cycles	t _d (MSRL)		9,10,11	All	20		ns
Delay time, last (127 or 255) rising edge of SC to QSF switching at the boundary during split-register transfer read cycles 22/	t _d (SC QSF) t _{SQD}		9,10,11	01		30	ns
				02		25	
				03		28	
Delay time, CAS low to QSF switching in transfer read cycles 22/	t _d (CLQSF) t _{CQD}	9,10,11	01		35	ns	
			02		30		
			03		33		
Delay time, TRG high to QSF switching in transfer read cycles 22/	t _d (GHQSF) t _{CQD}	9,10,11	01		30	ns	
			02		25		
			03		28		

See footnotes at end of table.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000

SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
13

TABLE I. Electrical performance characteristics - continued.

Test	Symbol/ altern. symbol	Conditions -55°C ≤ T _C ≤ +125°C 4.5 V ≤ V _{CC} ≤ 5.5 V unless otherwise specified	Group A subgroups	Device type	Limit		Unit
					Min	Max	
Delay time, RAS low to QSF switching in transfer read cycles 22/	t _d (RLQSF) t _{RQD}	Timing measurements are referenced to V _{IL} max and V _{IH} min. See figure 4 7/	9,10,11	01		75	ns
				02		70	
				03		73	
Refresh time interval, memory	t _{RF} (MA) t _{REF}		9,10,11	All		8	ms
Transition time	t _t t _T		9,10,11	All	3	50	ns

1/ For conditions shown as Min/Max, use the appropriate value specified in the timing requirements.

2/ SE is disabled for SQ output leakage tests.

3/ Measured with one address change while RAS = V_{IL}. t_c(rd), t_c(W), t_c(TRD) = Min.

4/ Measured with output open.

5/ Measured with one address change while CAS = V_{IH}.

6/ V_{CC} = 5 V ± 0.5 V, and the bias on pins under test is 0 V.

7/ Switching times for RAM port output are measured with a load equivalent to 1 TTL load and 50 pF. Data-out reference level: V_{OH} / V_{OL} = 2 V / 0.8 V. Switching times for SAM port output are measured with a load equivalent to 1 TTL load and 30 pF. Serial data-out reference level: V_{OH} / V_{OL} = 2 V / 0.8 V.

8/ t_{dis}(CH), t_{dis}(RH), t_{dis}(G), t_{dis}(WL) and t_{dis}(SE) are specified when the output is no longer driven.

9/ Cycle time assumes t_t = 3 ns.

10/ In a read-modify-write cycle, t_d(CLWL) and t_{su}(WCH) must be observed. Depending on the users's transition times, this may require additional CAS low time [t_w(CL)].

11/ In a read-modify-write cycle, t_d(RLWL) and t_{su}(WRH) must be observed. Depending on the users's transition times, this may require additional RAS low time [t_w(RL)].

12/ The minimum value is measured when t_d(RLCL) is set to t_d(RLCL) min as a reference.

13/ Either t_h(RHrd) or t_d(CHrd) must be satisfied for a read cycle.

14/ Output-enable-controlled write. Output remains in the high-impedance state for the entire cycle.

15/ CAS-before-RAS refresh operation only.

16/ Read-modify-write operation only.

17/ TRG must disable the output buffers prior to applying data to the DQ pins.

18/ The maximum value is specified only to assure RAS access time.

19/ Real-time load transfer read or late-load transfer read cycle only.

20/ Early-load transfer read cycle only.

21/ Full-register (read) transfer cycles only.

22/ Switching times for QSF output are measured with a load equivalent to 1 TTL load and 30 pF, and output reference level is V_{OH} / V_{OL} = 2 V / 0.8 V.


STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000

SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
14

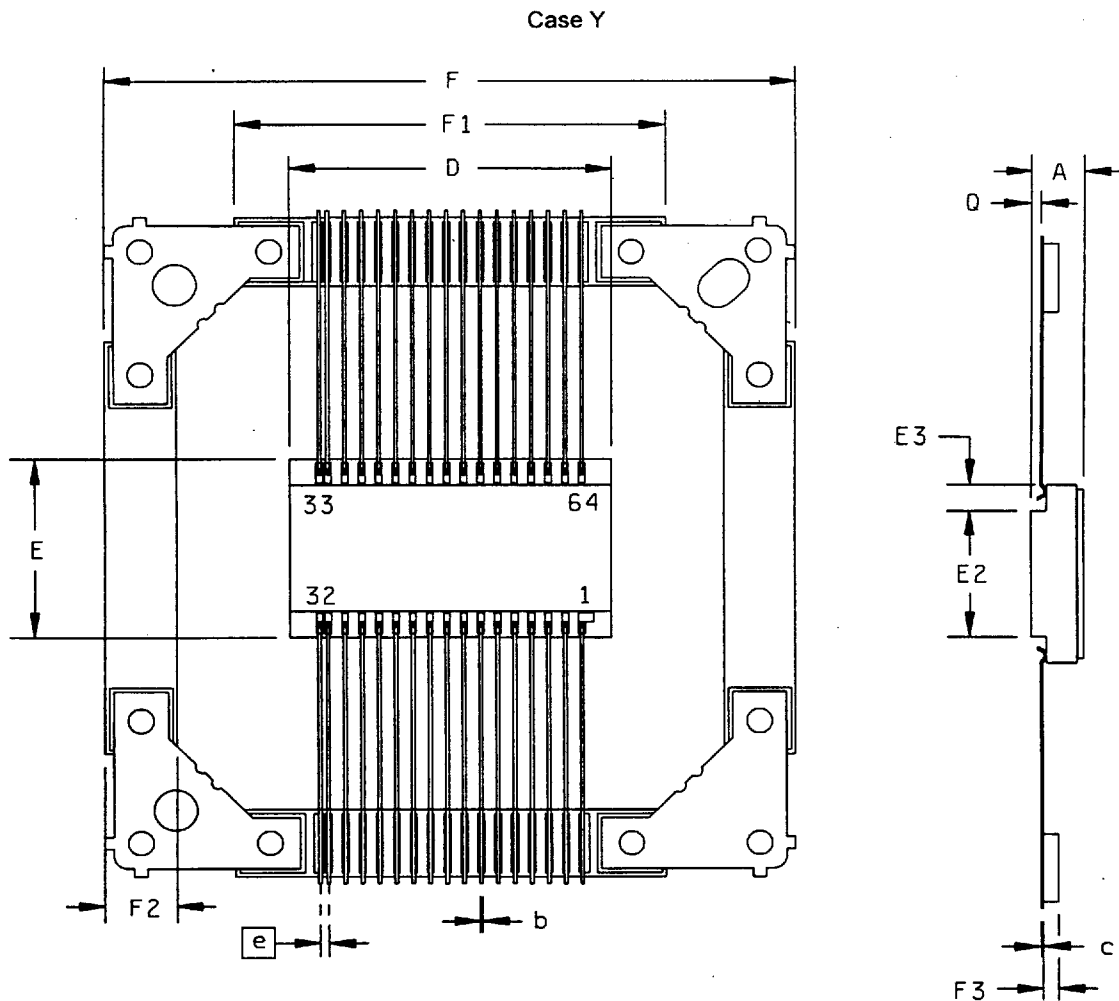

Symbol	Millimeters	
	Min	Max
A	2.54	3.81
b	0.15	0.25
c	0.11	0.20
D	18.54	19.43
E	10.67	11.30
E2	7.49	8.13
E3	1.40	1.78
e	0.50 BSC	
F	40.13	41.14
F1	24.89	25.91
F2	3.68	4.70
F3	0.76	1.02
Q	0.66	—

FIGURE 1. Case outline.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000

SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
15

Device types: All																
Case outline: X (Bottom view)																
PIN NO.	PIN NAME	PIN NO.	PIN NAME	PIN NO.	PIN NAME	PIN NO.	PIN NAME	PIN NO.	PIN NAME	PIN NO.	PIN NAME	PIN NO.	PIN NAME	PIN NO.	PIN NAME	
J1	DQ ₁	J2	SQ ₃	J3	DQ ₃	J4	DQ ₄	J5	DQ ₅	J6	DQ ₆	J7	SQ ₇	J8	WEL	
H1	DQ ₀	H2	SQ ₂	H3	DQ ₂	H4	SQ ₄	H5	SQ ₅	H6	SQ ₆	H7	DQ ₇	H8	WEU	
G1	SQ ₀	G2	SQ ₁	G3	V _{DD2}	G4	V _{SS2}			G6	V _{DD2}	G7	V _{SS2}	G8	RAS	
F1	TRG	F2	V _{SS1}	F3	V _{DD1}							F7	V _{DD1}	F8	V _{DD1}	
E1	SC	E2	V _{DD1}										E8	V _{SS1}	E9	A ₄
D1	SE	D2	V _{SS1}	D3	V _{DD1}							D7	V _{SS1}	D8	A ₃	
C1	SQ ₁₅	C2	V _{SS1}	C3	V _{DD2}	C4	V _{SS2}			C6	V _{DD2}	C7	V _{SS2}	C8	CAS	
B1	DQ ₁₅	B2	DQ ₁₄	B3	DQ ₁₃	B4	DQ ₁₂	B5	DQ ₁₁	B6	DQ ₁₀	B7	SQ ₈	B8	DSF	
A1	SQ ₁₄	A2	SQ ₁₃	A3	SQ ₁₂	A4	SQ ₁₁	A5	SQ ₁₀	A6	SQ ₉	A7	DQ ₉	A8	DQ ₈	
														A9	QSF	

Device types	All	Device types	All
Case outline	Y	Case outline	Y
Terminal number	Terminal symbol	Terminal number	Terminal symbol
1	VCC	33	VSS
2	TRG	34	A ₃
3	VSS	35	A ₂
4	SQ ₀	36	A ₁
5	DQ ₀	37	A ₀
6	SQ ₁	38	QSF
7	DQ ₁	39	CAS
8	VCC	40	NC / GND
9	SQ ₂	41	DSF
10	DQ ₂	42	VSS
11	SQ ₃	43	DQ ₈
12	DQ ₃	44	SQ ₈
13	VSS	45	DQ ₉
14	SQ ₄	46	SQ ₉
15	DQ ₄	47	VCC
16	SQ ₅	48	DQ ₁₀
17	DQ ₅	49	SQ ₁₀
18	VCC	50	DQ ₁₁
19	SQ ₆	51	SQ ₁₁
20	DQ ₆	52	VSS
21	SQ ₇	53	DQ ₁₂
22	DQ ₇	54	SQ ₁₂
23	VSS	55	DQ ₁₃
24	WEL	56	SQ ₁₃
25	WEU	57	VCC
26	RAS	58	DQ ₁₄
27	A ₈	59	SQ ₁₄
28	A ₇	60	DQ ₁₅
29	A ₆	61	SQ ₁₅
30	A ₅	62	VSS
31	A ₄	63	SE
32	VCC	64	SC

FIGURE 2. Terminal connections.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 16

DSCC FORM 2234
APR 97

9004708 0028576 T82

FUNCTION	RAS FALL				CAS FALL	ADDRESS		DQ0-DQ15 1/		MNE CODE
	CAS	TRG	WEX 2/	DSF	DSF	RAS	CAS 3/	RAS	WEL WEU CAS	
Reserved (do not use)	L	L	L	L	X	X	X	X	X	--
CAS-before-RAS-refresh (no reset) and stop point set 4/	L	X	L	H	X	Stop point 5/	X	X	X	CBRS
CAS-before-RAS-refresh (option reset) 6/	L	X	H	L	X	X	X	X	X	CBR
CAS-before-RAS-refresh (no reset) 7/	L	X	H	H	X	X	X	X	X	CBRN
Full-register transfer read	H	L	H	L	X	Row Addr	Tap Point	X	X	RT
Split-register transfer read	H	L	H	H	X	Row Addr	Tap Point	X	X	SRT
DRAM write (nonpersistent write-per-bit)	H	H	L	L	L	Row Addr	Col Addr	Write Mask	Valid Data	RWM
DRAM block write (nonpersistent write-per-bit)	H	H	L	L	H	Row Addr	Block Addr A2-A8	Write Mask	Col Mask	BWM
DRAM write (persistent write-per-bit)	H	H	L	L	L	Row Addr	Col Addr	X	Valid Data	RWM
DRAM block write (persistent write-per-bit)	H	H	L	L	H	Row Addr	Block Addr A2-A8	X	Col Mask	BWM
DRAM write (nonmasked)	H	H	H	L	L	Row Addr	Col Addr	X	Valid Data	RW
DRAM block write (nonmasked)	H	H	H	L	H	Row Addr	Block Addr A2-A8	X	Col Mask	BW
Load write-mask register 8/	H	H	H	H	L	Refresh Addr	X	X	Write Mask	LMR
Load color register	H	H	H	H	H	Refresh Addr	X	X	Color Data	LCR

X = Don't care

Col Mask = H: Write to address/column enabled

Write Mask = H: Write to I/O enabled

1/ DQ0-DQ15 are latched on either the first falling edge of WEX or the falling edge of CAS, whichever occurs later.

2/ Logic L is selected when either or both WEL and WEU are low.

3/ The column address and block address are latched on the first falling edge of CAS.

4/ CBRS cycle should be performed immediately after the power-up initialization cycle.

5/ A0-A3, A8: don't care; A4-A7: stop-point code.

6/ CAS-before-RAS-refresh (option reset) mode will end persistent write-per-bit mode and stop-point mode.

7/ CAS-before-RAS-refresh (no reset) mode will not end persistent write-per-bit mode or stop-point mode.

8/ Load-write-mask-register cycle will set the persistent write-per-bit mode. The persistent write-per-bit mode is reset only by the CAS-before-RAS-refresh (option reset) cycle.

FIGURE 3. Truth tables.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 17

FUNCTION	RAS FALL				CAS FALL	ADDRESS		DQ0-DQ15 1/		MNE CODE
	CAS	TRG	WEX 2/	DSF	DSF	RAS	CAS 3/	RAS	WEL WEU CAS	
Reserved (do not use)	L	L	L	L	X	X	X	X	X	--
CAS-before-RAS-refresh (no reset) and stop point set 4/	L	X	L	H	X	Stop point 5/	X	X	X	CBRS
CAS-before-RAS-refresh (option reset) 6/	L	X	H	L	X	X	X	X	X	CBR
CAS-before-RAS-refresh (no reset) 7/	L	X	H	H	X	X	X	X	X	CBRN
DRAM write (nonpersistent write-per-bit)	H	H	L	L	L	Row Addr	Col Addr	Write Mask	Valid Data	RWM
DRAM block write (nonpersistent write-per-bit)	H	H	L	L	H	Row Addr	Block Addr A2-A8	Write Mask	Col Mask	BWM
DRAM write (persistent write-per-bit)	H	H	L	L	L	Row Addr	Col Addr	X	Valid Data	RWM
DRAM block write (persistent write-per-bit)	H	H	L	L	H	Row Addr	Block Addr A2-A8	X	Col Mask	BWM
DRAM write (nonmasked)	H	H	H	L	L	Row Addr	Col Addr	X	Valid Data	RW
DRAM block write (nonmasked)	H	H	H	L	H	Row Addr	Block Addr A2-A8	X	Col Mask	BW
Load write-mask register 8/	H	H	H	H	L	Refresh Addr	X	X	Write Mask	LMR
Load color register	H	H	H	H	H	Refresh Addr	X	X	Color Data	LCR

X = Don't care

Col Mask = H: Write to address/column enabled

Write Mask = H: Write to I/O enabled

1/ DQ0-DQ15 are latched on either the first falling edge of WEX or the falling edge of CAS, whichever occurs later.

2/ Logic L is selected when either or both WEL and WEU are low.

3/ The column address and block address are latched on the first falling edge of CAS.

4/ CBRS cycle should be performed immediately after the power-up initialization cycle.

5/ A0-A3, A8: don't care; A4-A7: stop-point code.

6/ CAS-before-RAS-refresh (option reset) mode will end persistent write-per-bit mode and stop-point mode.

7/ CAS-before-RAS-refresh (no reset) mode will not end persistent write-per-bit mode or stop-point mode.

8/ Load-write-mask-register cycle will set the persistent write-per-bit mode. The persistent write-per-bit mode is reset only by the CAS-before-RAS-refresh (option reset) cycle.

FIGURE 3. Truth tables - continued.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 18

DSCC FORM 2234
APR 97

9004708 0028578 855

READ-CYCLE TIMING WITH $\overline{\text{CAS}}$ -CONTROLLED OUTPUT

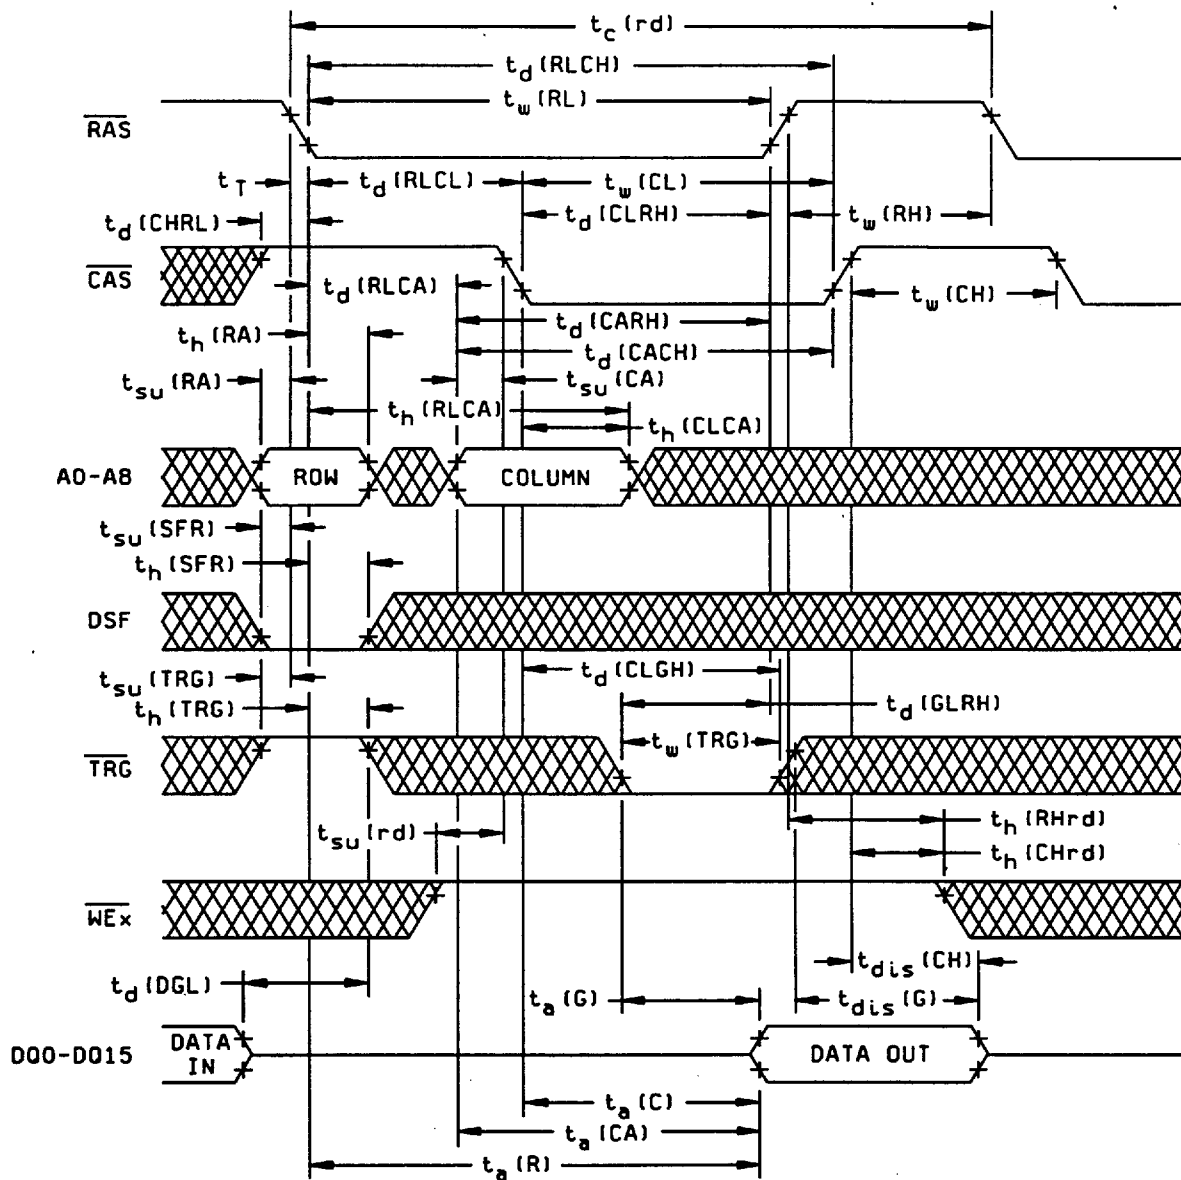


FIGURE 4. Timing waveforms.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000

SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
19

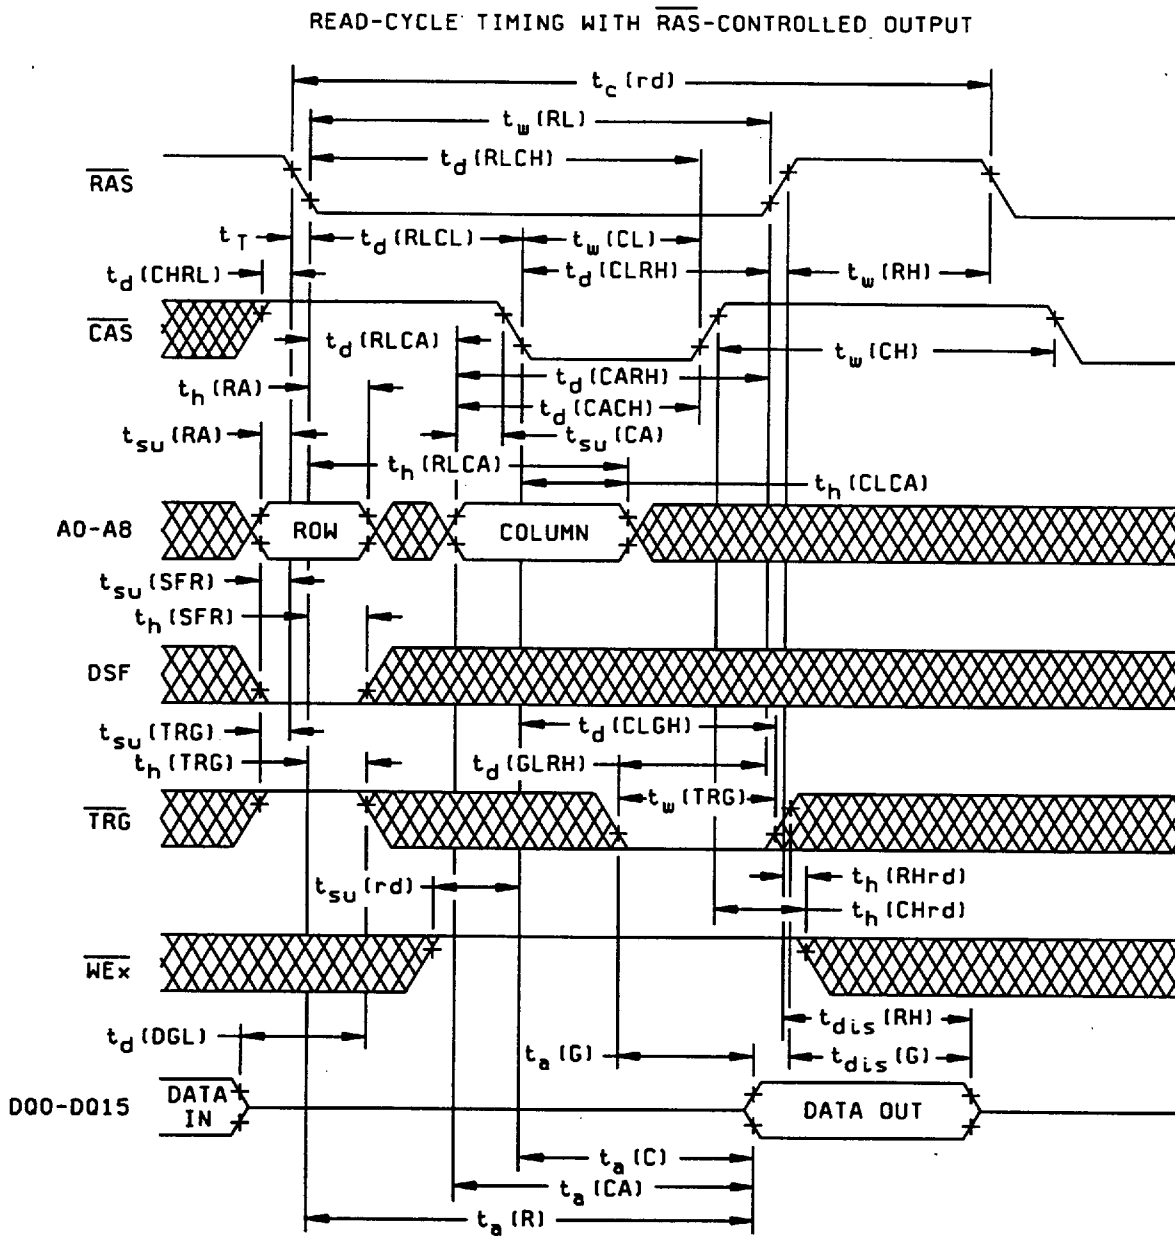


FIGURE 4. Timing waveforms - continued.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 20


DSCC FORM 2234
APR 97

9004708 0028580 403

[illegible]

Cycle	State		
	1	2	3
Write operation (nonmasked)	H	Don't care	Valid data
Write operation with nonpersistent w/B	L	Write mask	Valid data
Write operation with persistent w/B	L	Don't care	Valid data

FIGURE 4. Timing waveforms - continued.

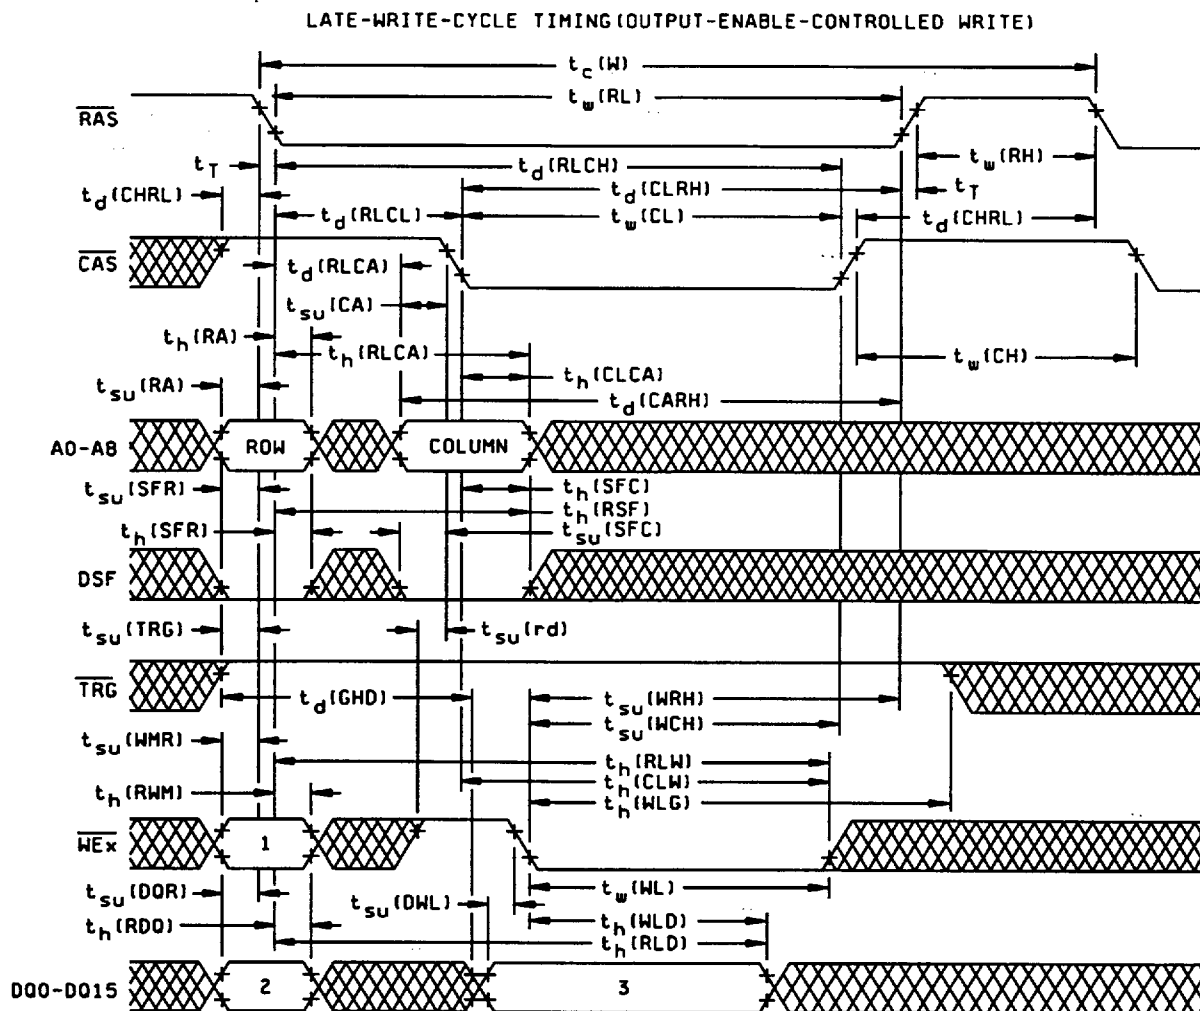

Cycle	State		
	1	2	3
Write operation (nonmasked)	H	Don't care	Valid data
Write operation with nonpersistent w/B	L	Write mask	Valid data
Write operation with persistent w/B	L	Don't care	Valid data

FIGURE 4. Timing waveforms - continued.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000

SIZE
A

5962-95643


REVISION LEVEL
C

SHEET
22

FIGURE 4. Timing waveforms - continued.

Powered by ICminer.com Electronic-Library Service CopyRight 2003

LOAD-WRITE-MASK-REGISTER-CYCLE TIMING (LATE-WRITE LOAD)

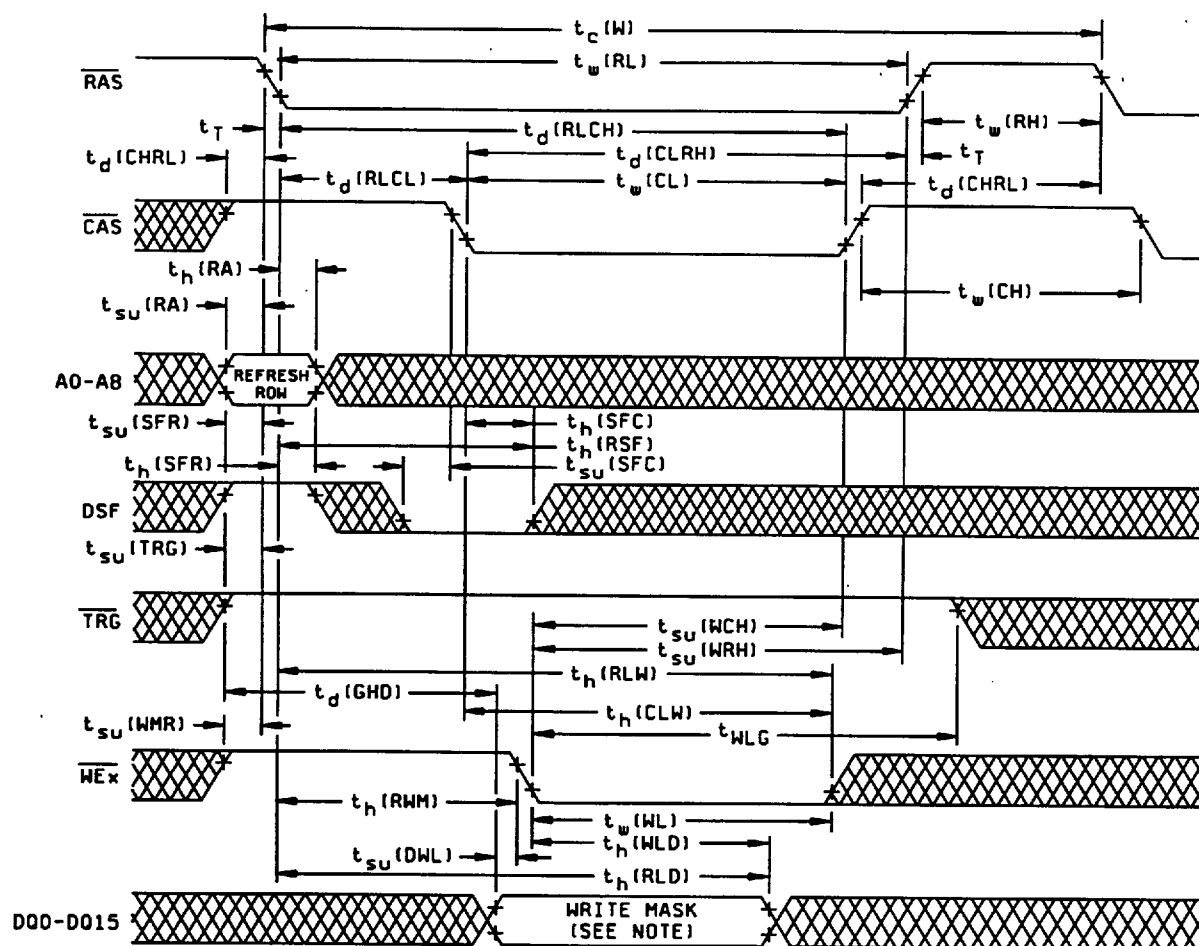

NOTE: Load-write-mask-register cycle will put the device into the persistent write-per-bit mode.

FIGURE 4. Timing waveforms - continued.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000


SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
24

READ-WRITE/READ-MODIFY-WRITE-CYCLE TIMING

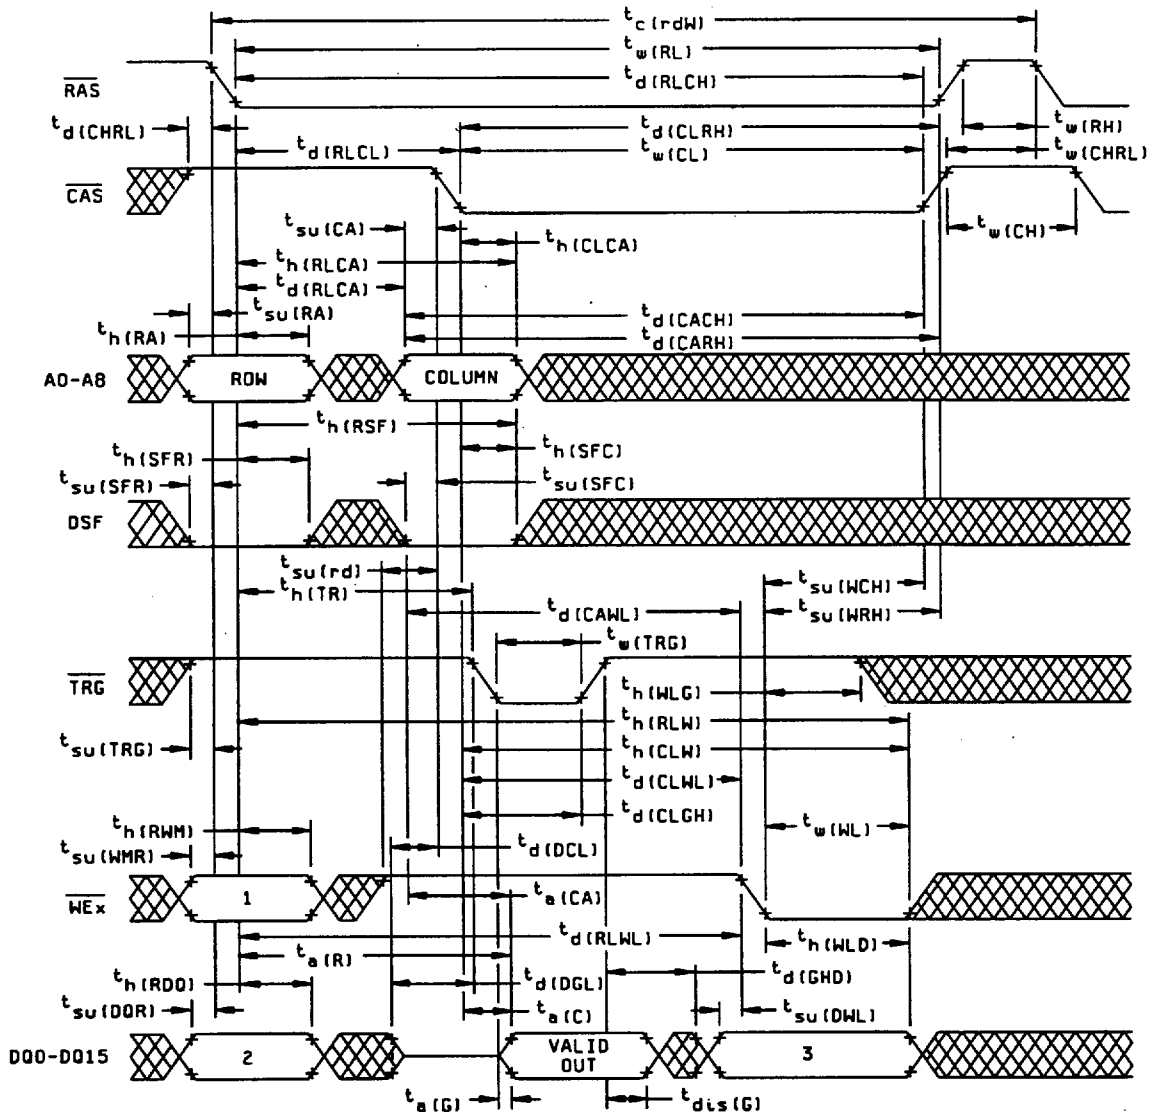

Cycle	State		
	1	2	3
Write operation (nonmasked)	H	Don't care	Valid data
Write operation with nonpersistent w/B	L	Write mask	Valid data
Write operation with persistent w/B	L	Don't care	Valid data

FIGURE 4. Timing waveforms - continued.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000


SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
25

ENHANCED PAGE-MODE READ CYCLE TIMING
SEE NOTE 1

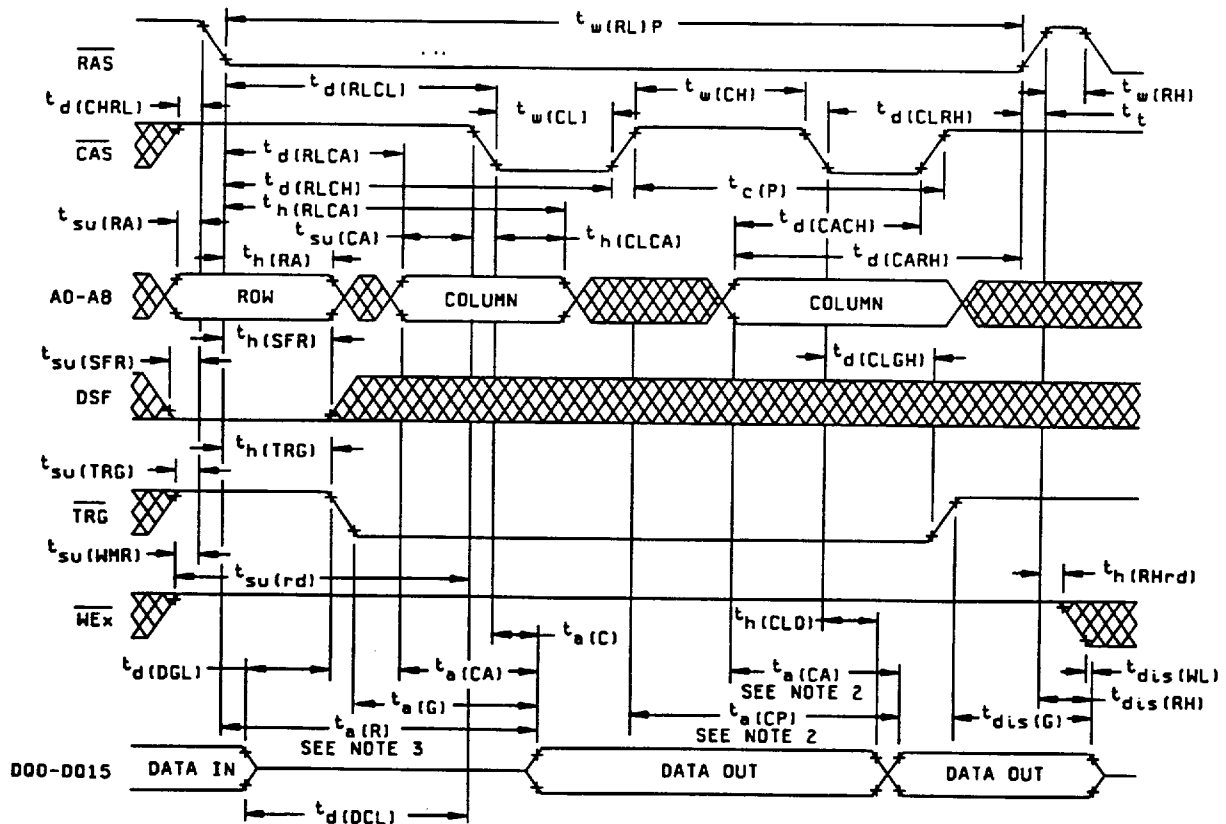

NOTES:

1. A write cycle or a read-modify-write cycle can be mixed with the read cycles as long as the write and read-modify-write timing specifications are not violated and the proper polarity of DSF is selected on the falling edge of RAS and CAS to select the desired write mode (normal, block write, etc.).
2. Access time is $t_a(CP)$ or $t_a(CA)$ dependent.
3. Output can go from the high-impedance state to an invalid data state prior to the specified access time.

FIGURE 4. Timing waveforms - continued.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000

SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
26

[illegible]


Cycle	State				
	1	2	3	4	5
Write operation (nonmasked)	L	L	H	Don't care	Valid data
Write operation with nonpersistent w/B	L	L	L	Write mask	Valid data
Write operation with persistent w/B	L	L	L	Don't care	Valid data
Load write mask on first falling edge of $CAS\bar{x}$ or the falling edge of WE , whichever occurs later	H	L	H	Don't care	Write mask

1. Referenced to the first falling edge of $\overline{WEX}$ or the falling edge of $\overline{CAS}$, whichever occurs later.
2. A read cycle or a read-modify-write cycle can be intermixed with write cycles, observing read and read-modify-write timing specifications. To assure page-mode cycle time, $\overline{TRG}$ must remain high throughout the entire page-mode operation if the late write feature is used. If the early write-cycle timing is used, the state of $\overline{TRG}$ is a don't care after the minimum period $t_{h(\overline{TRG})}$ from the falling edge of $\overline{RAS}$.

FIGURE 4. Timing waveforms - continued.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 27

ENHANCED-PAGE-MODE READ-MODIFY-WRITE-CYCLE TIMING (SEE NOTE 1)

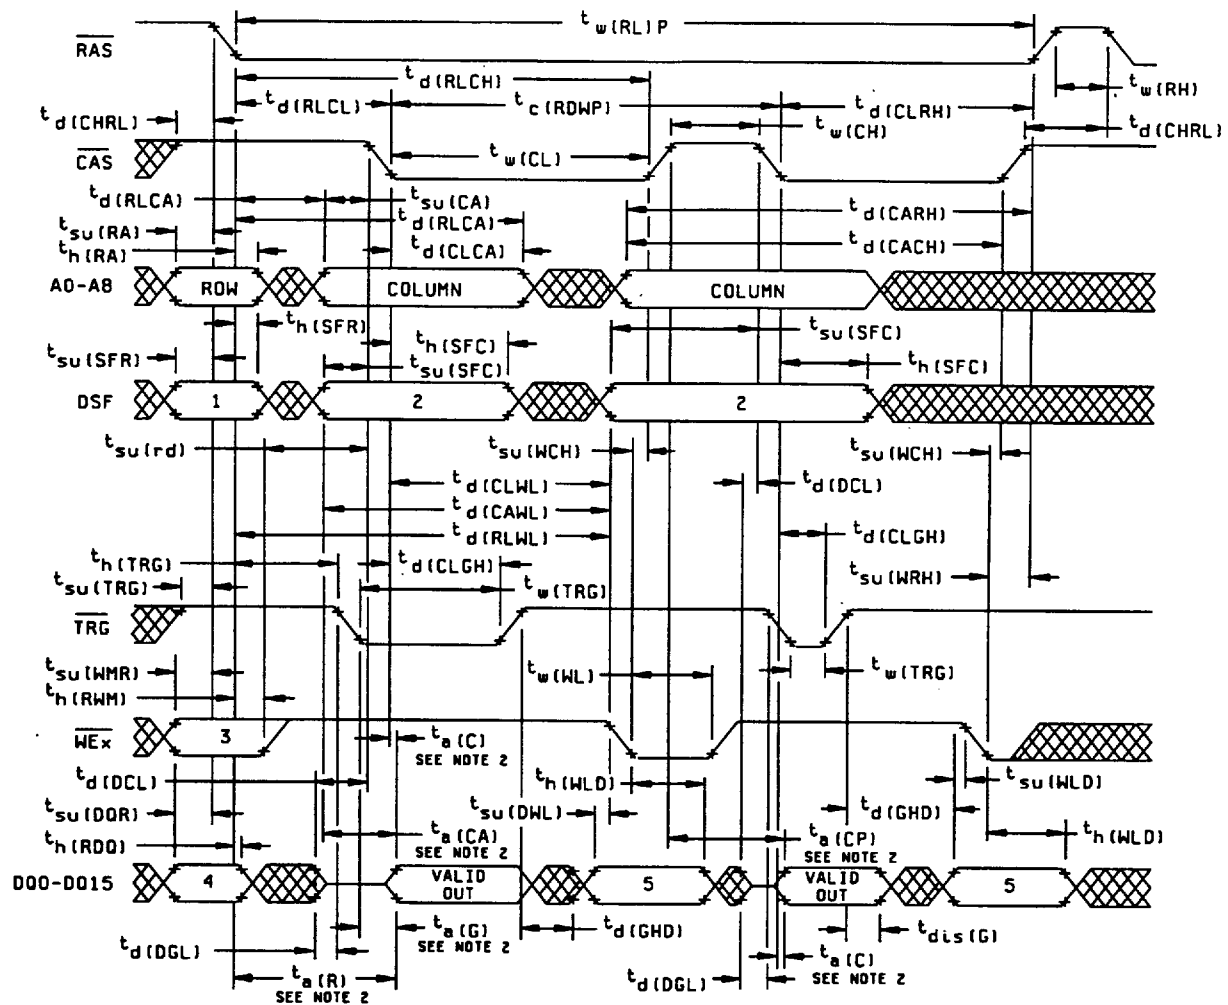

Cycle	State				
	1	2	3	4	5
Write operation (nonmasked)	L	L	H	Don't care	Valid data
Write operation with nonpersistent w/B	L	L	L	Write mask	Valid data
Write operation with persistent w/B	L	L	L	Don't care	Valid data
Load write mask on first falling edge of CAS or or the falling edge of $\overline{WE}_x$, whichever occurs later	H	L	H	Don't care	Write mask


NOTES:

1. A read or a write cycle can be intermixed with read-modify-write cycles as long as the read and write timing specifications are not violated.
2. Output can go from the high-impedance state to an invalid data state prior to the specified access time.

FIGURE 4. Timing waveforms - continued.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 28

ENHANCED-PAGE-MODE READ/WRITE-CYCLE TIMING (SEE NOTE 1)

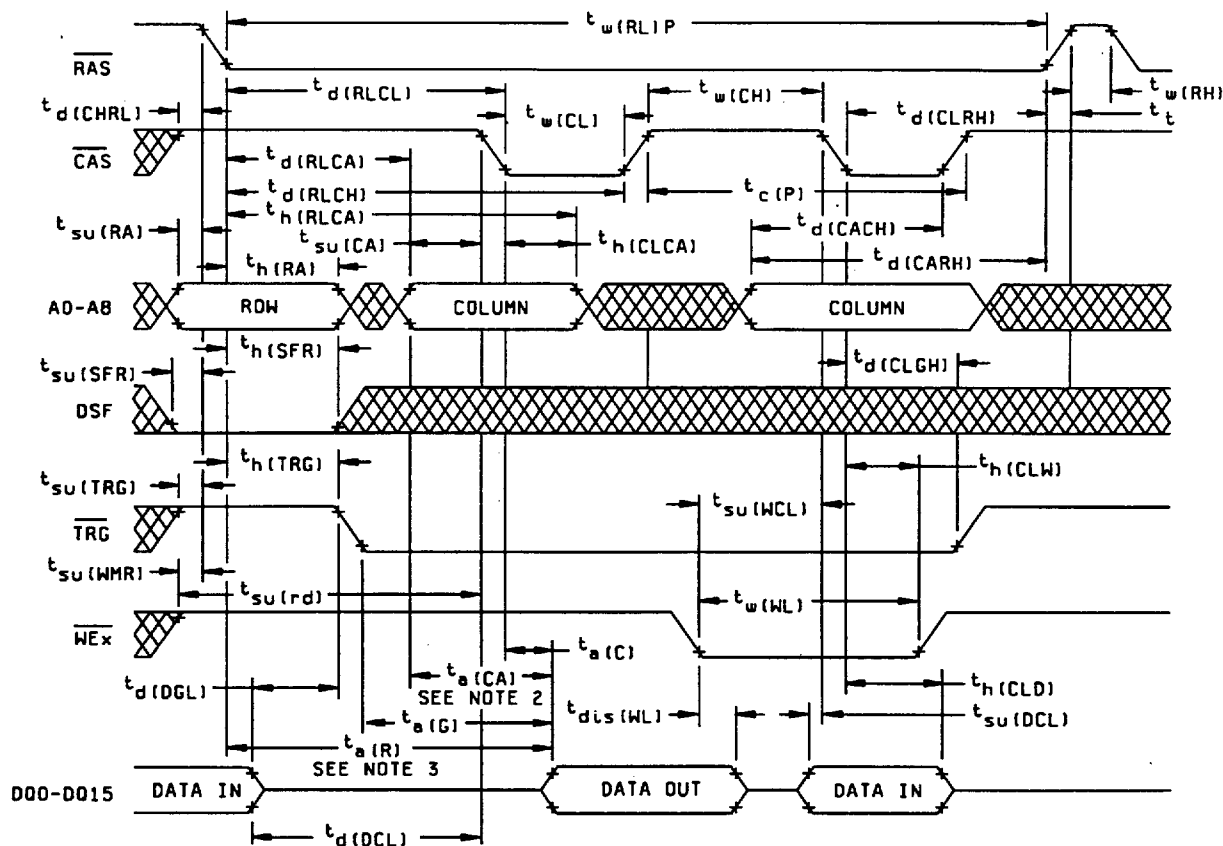

NOTES:

1. A write cycle or a read-modify-write cycle can be mixed with the read cycles as long as the write and read-modify-write timing specification are not violated and the proper polarity of DSF is selected on the falling edge of RAS and CAS to select the desired write mode (normal, block write, etc.).
2. Access time is $t_a(CP)$ or $t_a(CA)$ dependent.
3. Output can go from the high-impedance state to an invalid data state prior to the specified access time.

FIGURE 4. Timing waveforms - continued.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 29

DSCC FORM 2234
APR 97

9004708 0028589 630

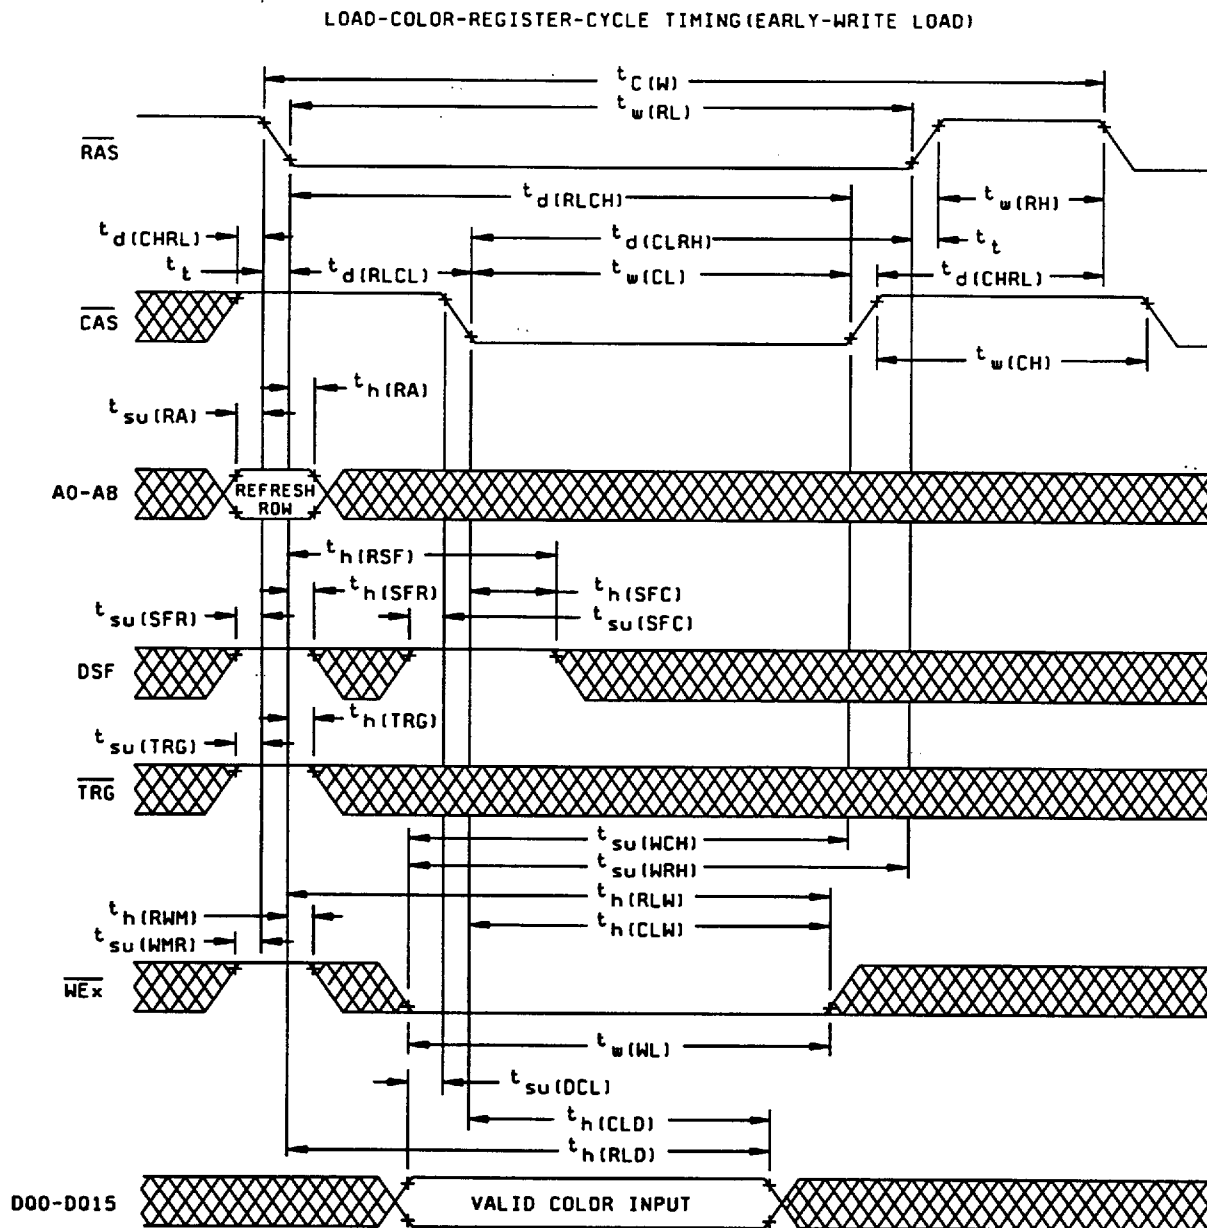


FIGURE 4. Timing waveforms - continued.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000

SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
30

LOAD-COLOR-REGISTER-CYCLE TIMING (LATE-WRITE LOAD)


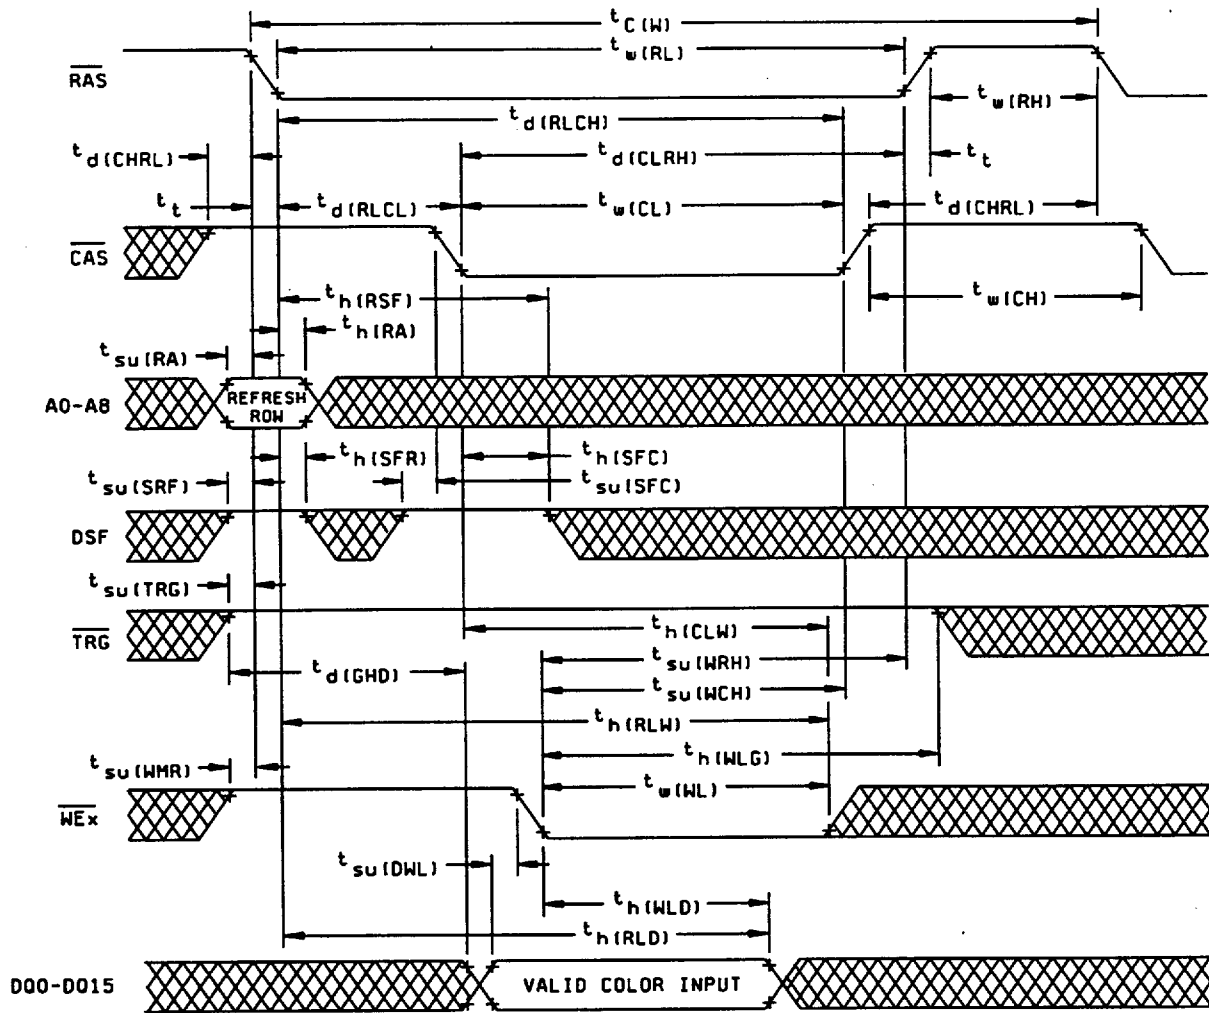


FIGURE 4. Timing waveforms - continued.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 31

BLOCK-WRITE-CYCLE TIMING (EARLY-WRITE)

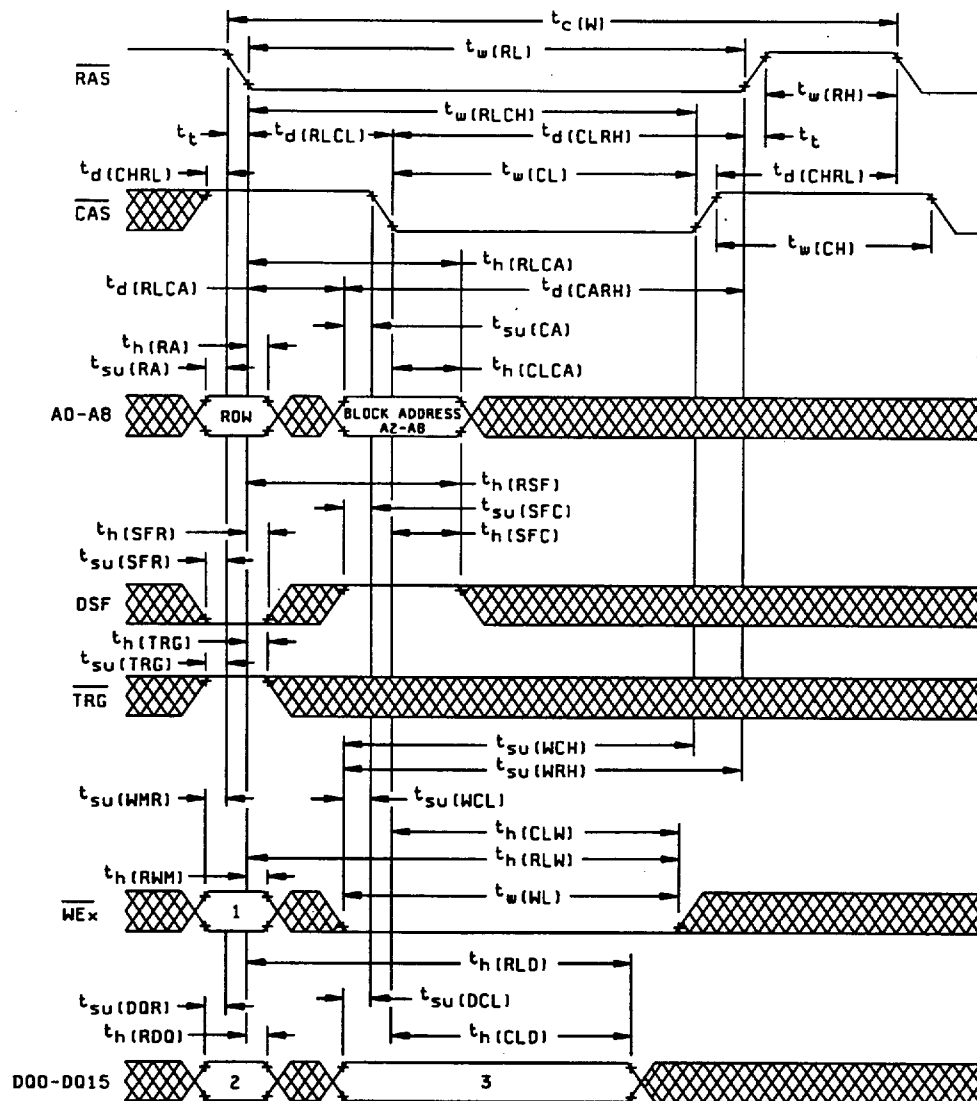

Cycle	State		
	1	2	3
Block-write operation (nonmasked)	H	Don't care	Column mask
Block-write operation with nonpersistent w/B	L	Write mask	Column mask
Block-write operation with persistent w/B	L	Don't care	Column mask

For write-mask data, 0 = I/O write disable, 1 = I/O write enable.

For column-mask data (DQI to DQI + 3; I = 0, 4, 8, 12), 0 = column write disable, 1 = column write enable.

FIGURE 4. Timing waveforms - continued.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000

SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
32

The diagram illustrates the timing relationships for the 68000 microprocessor. It shows the following signals and their associated timing parameters:

- RAS**: Read Address Strobe. Timing parameters include $t_c(W)$ (RAS to $\overline{CAS}$), $t_w(RL)$ (RAS to $\overline{CAS}$), $t_w(RH)$ (RAS to $\overline{CAS}$), t_t (RAS to $\overline{CAS}$), $t_d(CHRL)$ (RAS to $\overline{CAS}$), $t_d(RLCL)$ (RAS to $\overline{CAS}$), $t_d(RLCH)$ (RAS to $\overline{CAS}$), $t_d(CLRH)$ (RAS to $\overline{CAS}$), $t_w(CL)$ (RAS to $\overline{CAS}$), $t_d(CHRL)$ (RAS to $\overline{CAS}$).
- CAS**: Column Address Strobe. Timing parameters include $t_w(CH)$ (CAS to $\overline{CAS}$), $t_h(RLCA)$ (CAS to $\overline{CAS}$), $t_d(RLCA)$ (CAS to $\overline{CAS}$), $t_d(CARH)$ (CAS to $\overline{CAS}$), $t_d(CACH)$ (CAS to $\overline{CAS}$), $t_{su}(CA)$ (CAS to $\overline{CAS}$), $t_h(CLCA)$ (CAS to $\overline{CAS}$).
- AO-AB**: Address Output. Timing parameters include $t_{su}(RA)$ (AO-AB to $\overline{CAS}$), $t_h(RA)$ (AO-AB to $\overline{CAS}$), $t_{su}(SFR)$ (AO-AB to $\overline{CAS}$), $t_h(SFR)$ (AO-AB to $\overline{CAS}$), $t_{su}(SFC)$ (AO-AB to $\overline{CAS}$), $t_h(SFC)$ (AO-AB to $\overline{CAS}$), $t_{su}(TRG)$ (AO-AB to $\overline{CAS}$).
- DSF**: Data Strobe. Timing parameters include $t_{su}(TRG)$ (DSF to $\overline{CAS}$).
- TRG**: Transfer Gate. Timing parameters include $t_d(GHD)$ (TRG to $\overline{CAS}$), $t_h(CLW)$ (TRG to $\overline{CAS}$), $t_{su}(WCH)$ (TRG to $\overline{CAS}$), $t_h(RLW)$ (TRG to $\overline{CAS}$), $t_{su}(WRH)$ (TRG to $\overline{CAS}$), $t_h(WLG)$ (TRG to $\overline{CAS}$), $t_w(WL)$ (TRG to $\overline{CAS}$).
- WE**: Write Enable. Timing parameters include $t_{su}(WMR)$ (WE to $\overline{CAS}$), $t_h(RWM)$ (WE to $\overline{CAS}$), $t_{su}(DOR)$ (WE to $\overline{CAS}$), $t_h(RDO)$ (WE to $\overline{CAS}$), $t_{su}(DWL)$ (WE to $\overline{CAS}$), $t_h(WLD)$ (WE to $\overline{CAS}$), $t_h(RLD)$ (WE to $\overline{CAS}$).
- D00-D015**: Data Bus. Timing parameters include $t_{su}(DOR)$ (D00-D015 to $\overline{CAS}$), $t_h(RDO)$ (D00-D015 to $\overline{CAS}$), $t_{su}(DWL)$ (D00-D015 to $\overline{CAS}$), $t_h(WLD)$ (D00-D015 to $\overline{CAS}$), $t_h(RLD)$ (D00-D015 to $\overline{CAS}$).

Cycle	State		
	1	2	3
Block-write operation (nonmasked)	H	Don't care	Column mask
Block-write operation with nonpersistent w/B	L	Write mask	Column mask
Block-write operation with persistent w/B	L	Don't care	Column mask

For column-mask data (DQI to DQI + 3; I = 0, 4, 8, 12), 0 = column write disable, 1 = column write enable.

FIGURE 4. Timing waveforms - continued.

**STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000**


SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
33

ENHANCED-PAGE-MODE BLOCK-WRITE-CYCLE TIMING

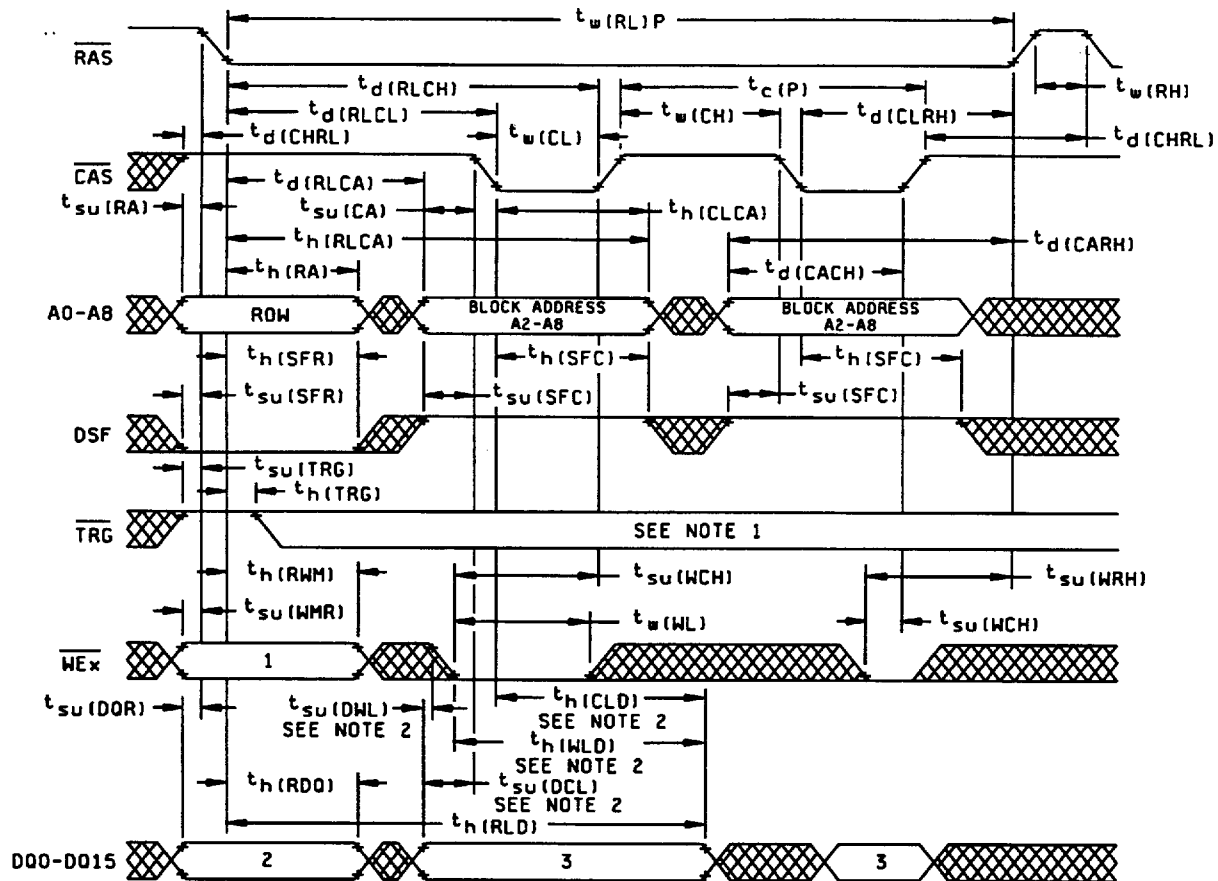

Cycle	State		
	1	2	3
Block-write operation (nonmasked)	H	Don't care	Column mask
Block-write operation with nonpersistent w/B	L	Write mask	Column mask
Block-write operation with persistent w/B	L	Don't care	Column mask

For write-mask data, 0 = I/O write disable, 1 = I/O write enable.

For column-mask data (DQ1 to DQ1 + 3; 1 = 0, 4, 8, 12), 0 = column write disable, 1 = column write enable.

NOTES:

1. To assure page-mode cycle time, TRG must remain high throughout the entire page-mode operation if the late-write feature is used. If the early-write cycle timing is used, the state of TRG is a don't care after the minimum period $t_h(TRG)$ from the falling edge of RAS.
2. Referenced to the first falling edge of CAS or the falling edge or WEx, whichever occurs later.

FIGURE 4. Timing waveforms - continued.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 34

DSCC FORM 2234
APR 97

9004708 0028594 TT8

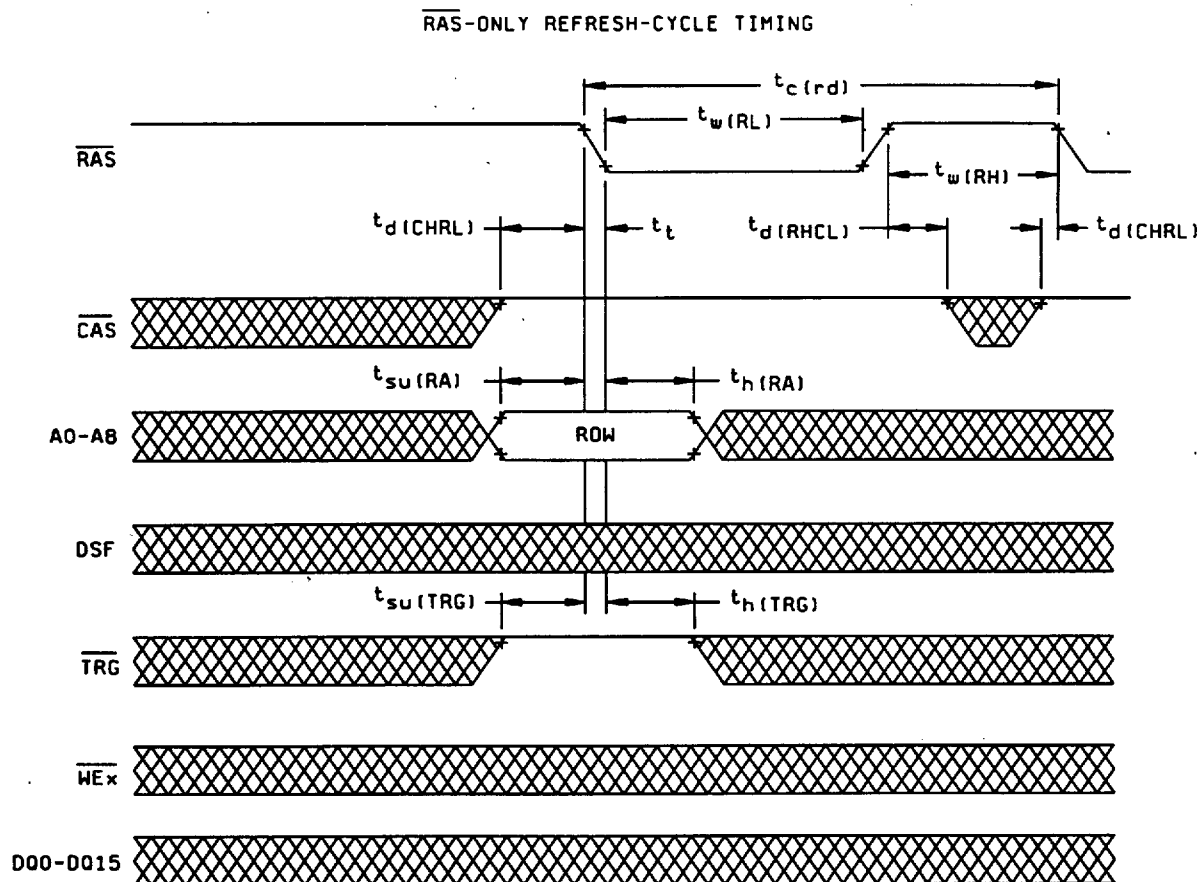


FIGURE 4. Timing waveforms - continued.


STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000

SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
35

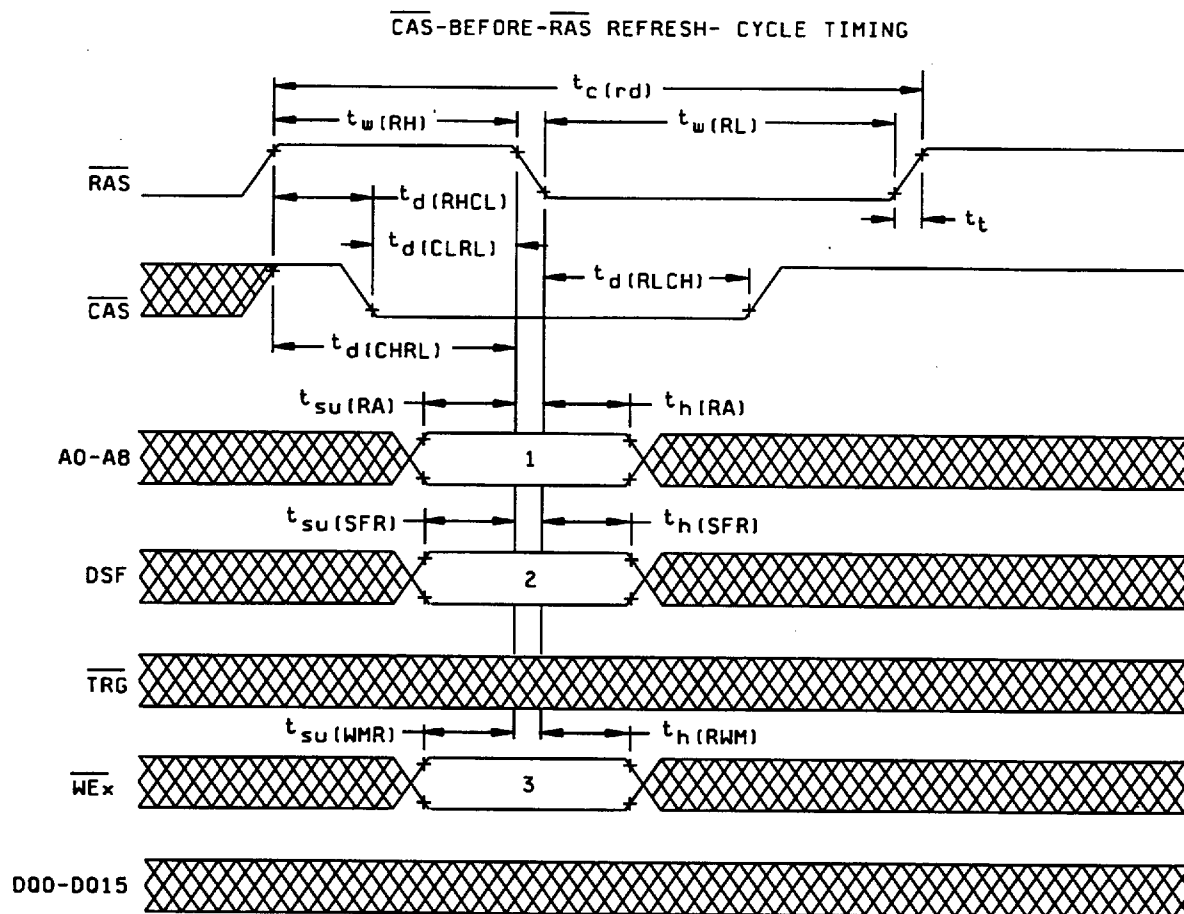

Cycle	State		
	1	2	3
CAS-before-RAS refresh with option reset	Don't care	L	H
CAS-before-RAS refresh with no reset	Don't care	H	H
CAS-before-RAS refresh with stop-point set and no reset	Stop address	H	L

FIGURE 4. Timing waveforms - continued.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000


SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
36

HIDDEN-REFRESH-CYCLE TIMING

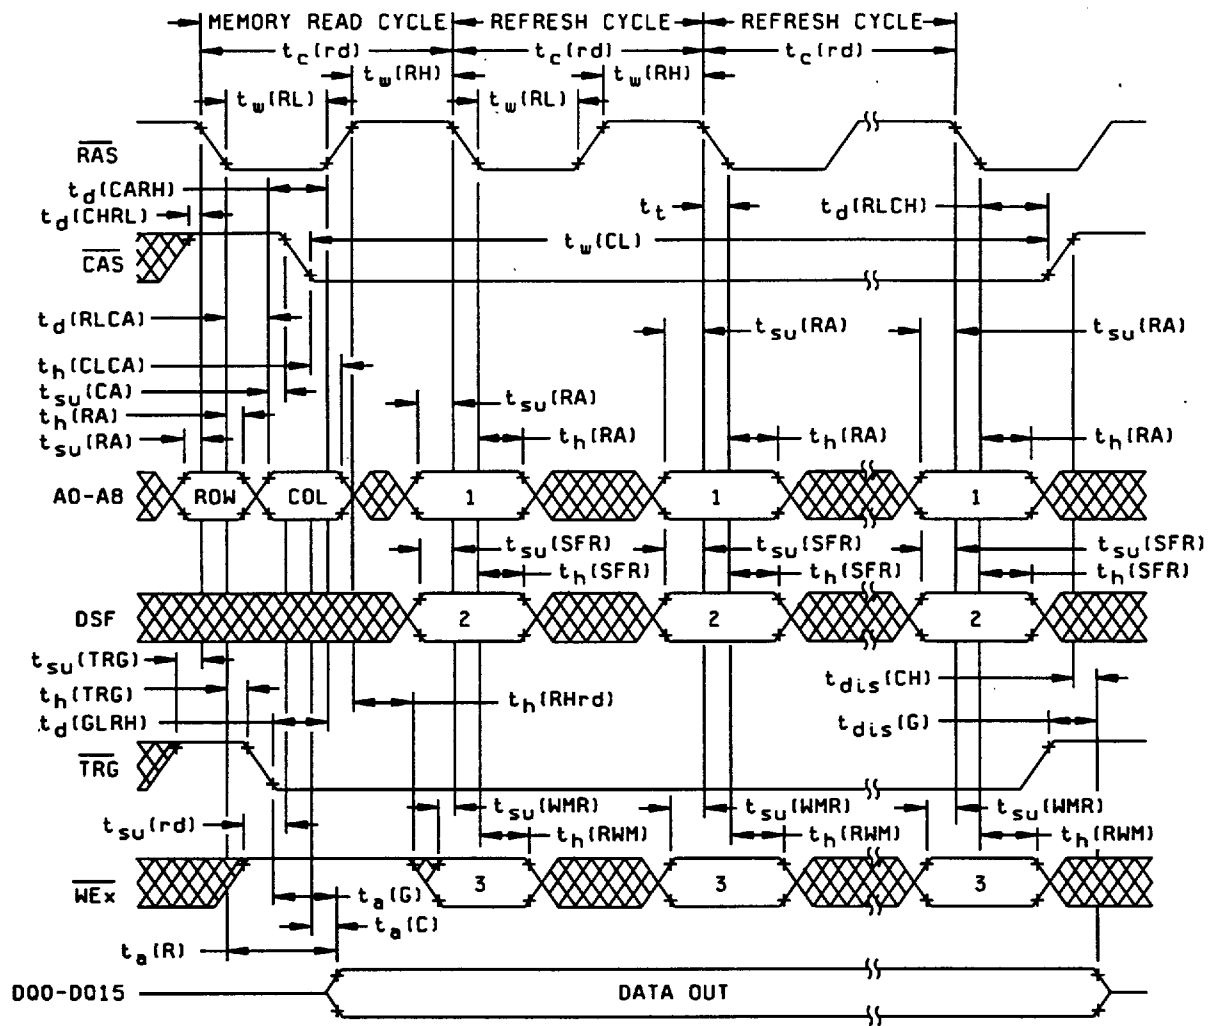

Cycle	State		
	1	2	3
CAS-before-RAS refresh with option reset	Don't care	L	H
CAS-before-RAS refresh with no reset	Don't care	H	H
CAS-before-RAS refresh with stop-point set and no option reset	Stop address	H	L

FIGURE 4. Timing waveforms - continued.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000


SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
37

FULL-REGISTER TRANSFER READ TIMING, EARLY-LOAD OPERATIONS

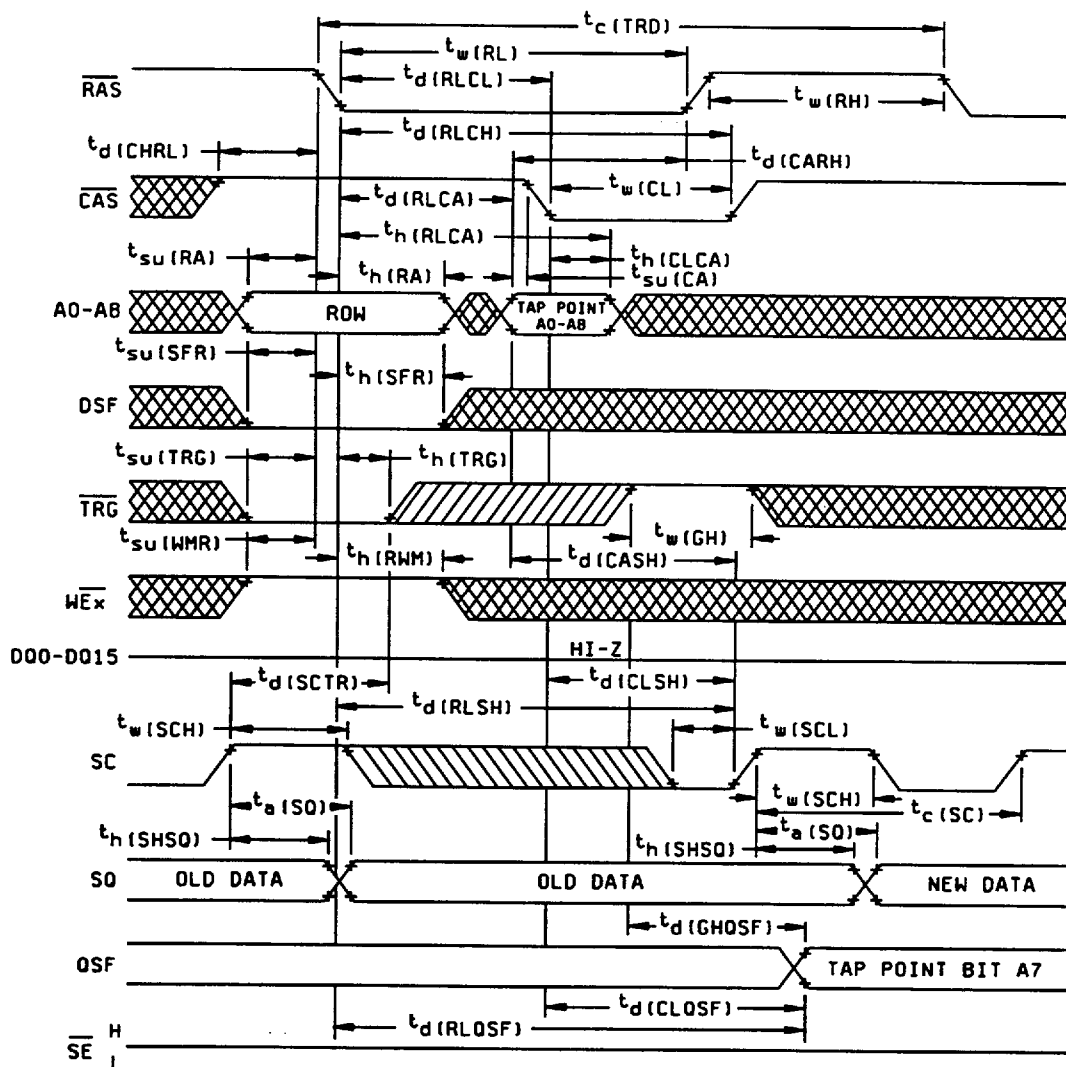

NOTES:

1. DQ outputs remain in the high-impedance state for the entire memory-to-register transfer cycle. The memory-to-data-register transfer cycle is used to load the data registers in parallel from the memory array. The 256 locations in each data register are written into from the 256 corresponding columns of the selected row.
2. Once data is transferred into the data registers, the SAM is in the serial read mode (i.e., the SQ is enabled), allowing data to be shifted out of the registers. Also, the first bit to read from the data register after TRG has gone high must be activated by a positive transition of SC.
3. A0-A7: register tap point; A8: identifies the half of the transferred row.
4. Early-load operation is defined as $t_h(\text{TRG})_{\min} < t_h(\text{TRG}) < t_d(\text{RLTH})_{\min}$.

FIGURE 4. Timing waveforms - continued.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 38

DSCC FORM 2234
APR 97

9004708 0028598 643

1. DQ outputs remain in the high-impedance state for the entire memory-to-register transfer cycle. The memory-to-data-register transfer cycle is used to load the data registers in parallel from the memory array. The 256 locations in each data register are written into from the 256 corresponding columns of the selected row.
2. Once data is transferred into the data registers, the SAM is in the serial read mode (i.e., the SQ is enabled), allowing data to be shifted out of the registers. Also, the first bit to read from the data register after TRG has gone high must be activated by a positive transition of SC.
3. A0-A7: register tap point; A8: identifies the half of the transferred row.
4. Late-load operation is defined as $t_d(\text{THRH}) < 0 \text{ ns}$.

**STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000**

5962-95643

SHEET
39

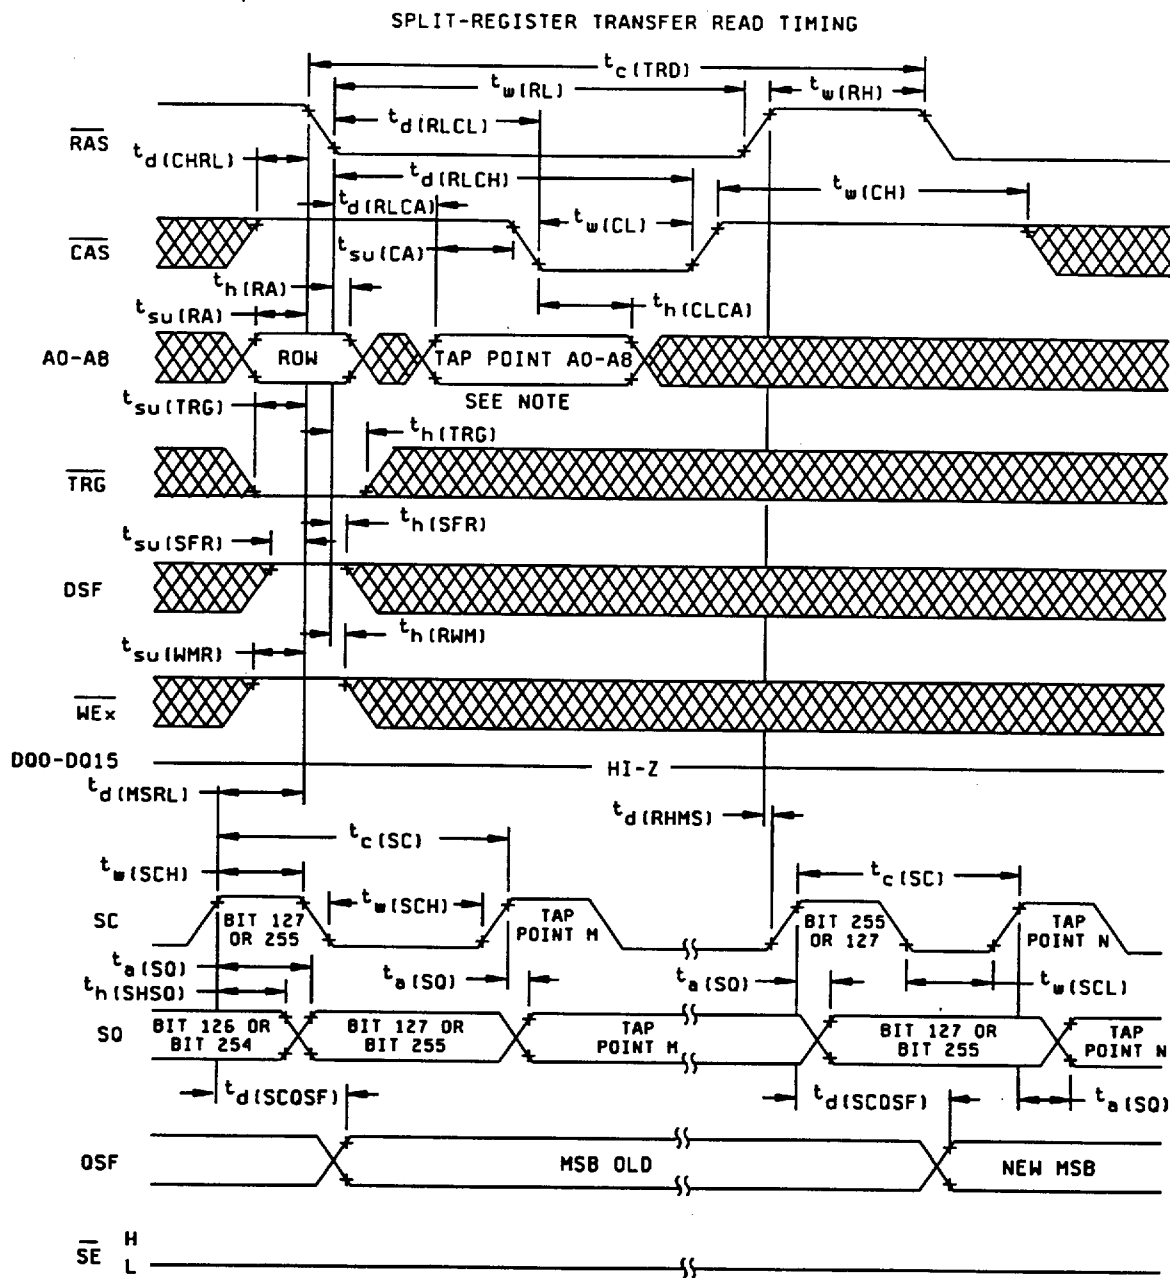


FIGURE 4. Timing waveforms - continued.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000

SIZE
A

5962-95643


REVISION LEVEL
C

SHEET
40

DSCC FORM 2234
APR 97

9004708 0028600 021

Serial-read-cycle timing: $\overline{SE} = V_{IL}$ (see notes 1 and 2)

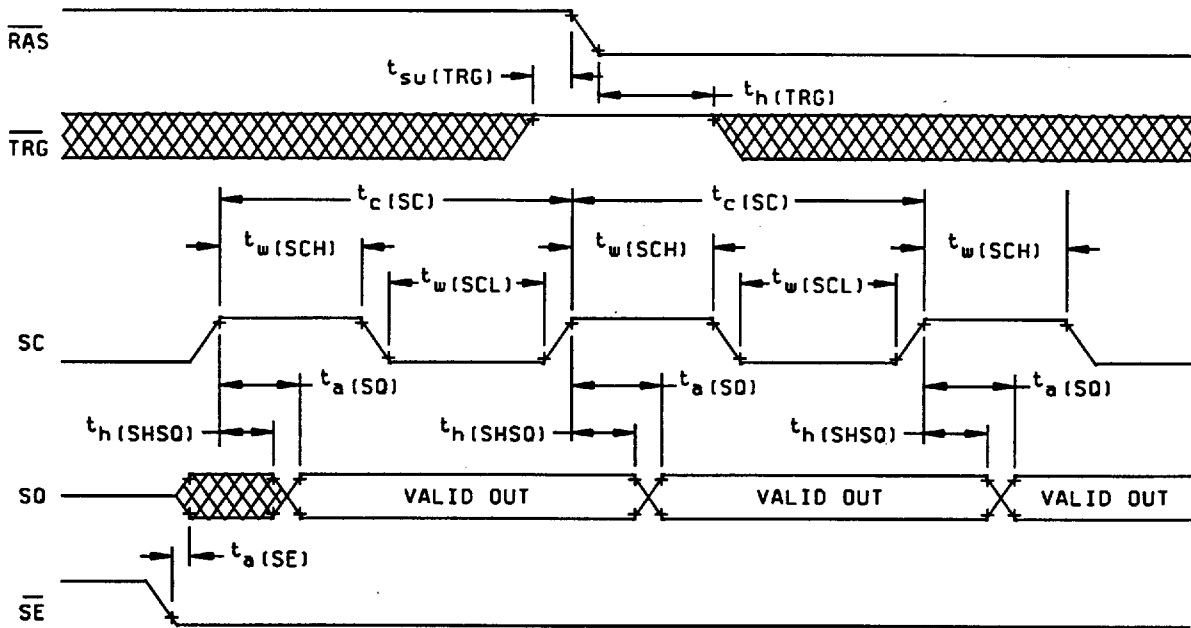

NOTES:

1. While the data is being read through the serial-data register, $\overline{TRG}$ is a don't care, except $\overline{TRG}$ must be held high when $\overline{RAS}$ goes low. This is to avoid the initiation of a register-data transfer operation.
2. The serial data-out cycle is used to read data out of the data registers. Before data can be read via SQ , the device must be put into the read mode by performing a transfer read cycle.

FIGURE 4. Timing waveforms - continued.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000


SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
41

Serial-read timing: SE-controlled read (see notes 1 and 2)

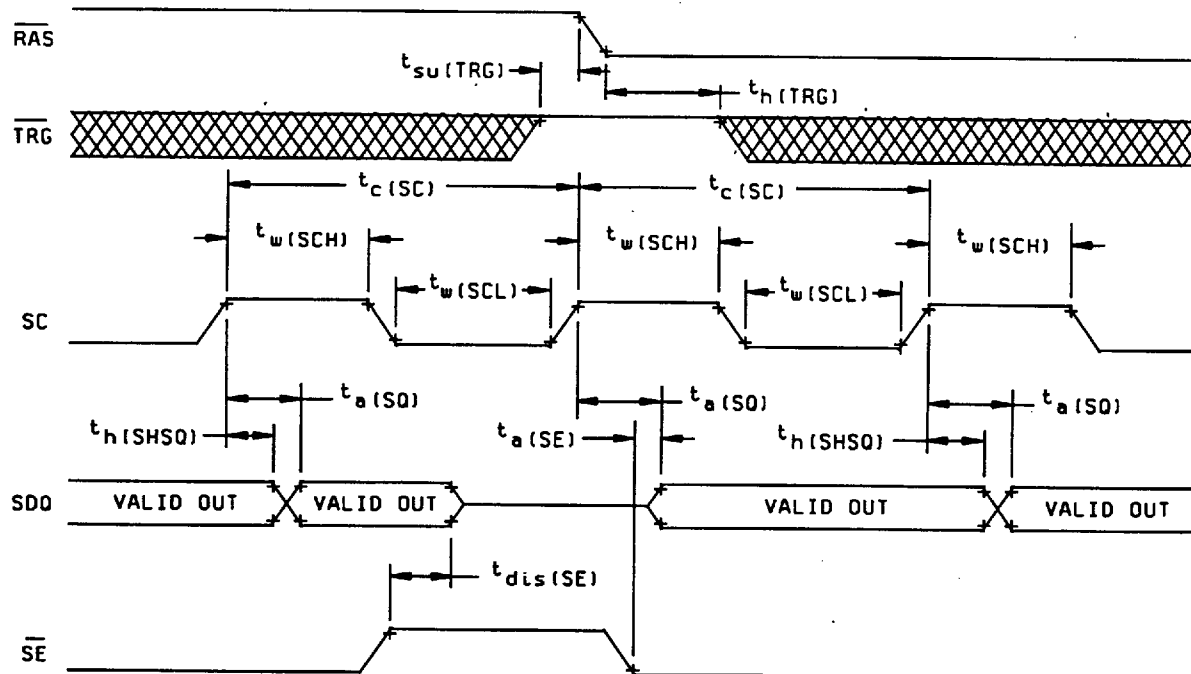

NOTES:

1. While the data is being read through the serial-data register, $\overline{\text{TRG}}$ is a don't care, except $\overline{\text{TRG}}$ must be held high when $\overline{\text{RAS}}$ goes low. This is to avoid the initiation of a register-data transfer operation.
2. The serial data-out cycle is used to read data out of the data registers. Before data can be read via SQ , the device must be put into the read mode by performing a transfer read cycle.

FIGURE 4. Timing waveforms - continued.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000

SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
42

TABLE IIA. Electrical test requirements. 1/ 2/ 3/ 4/ 5/ 6/ 7/

Line no.	Test requirements	Subgroups (in accordance with MIL-STD-883, TM 5005, table I)	Subgroups (in accordance with MIL-PRF-38535, table III)	
		Device class M	Device class Q	Device class V
1	Interim electrical parameters (see 4.2)			1, 7, 9
2	Static burn-in (method 1015)	Not required	Not required	Required
3	Same as line 1			1*, 7* Δ
4	Dynamic burn-in (method 1015)	Required	Required	Required
5	Same as line 1			1*, 7* Δ
6	Final electrical parameters (see 4.2)	1*, 2, 3, 7*, 8A, 8B, 9, 10, 11	1*, 2, 3, 7*, 8A, 8B, 9, 10, 11	1*, 2, 3, 7*, 8A, 8B, 9, 10, 11
7	Group A test requirements (see 4.4)	1, 2, 3, 4**, 7, 8A, 8B, 9, 10, 11	1, 2, 3, 4**, 7, 8A, 8B, 9, 10, 11	1, 2, 3, 4**, 7, 8A, 8B, 9, 10, 11
8	Group C end-point electrical parameters (see 4.4)	2, 3, 7, 8A, 8B	1, 2, 3, 7, 8A, 8B	1, 2, 3, 7, 8A, 8B, 9, 10, 11 Δ
9	Group D end-point electrical parameters (see 4.4)	2, 3, 8A, 8B	2, 3, 8A, 8B	2, 3, 8A, 8B
10	Group E end-point electrical parameters (see 4.4)	1, 7, 9	1, 7, 9	1, 7, 9

1/ Blank spaces indicate tests are not applicable.

2/ Any or all subgroups may be combined when using high-speed testers.

3/ Subgroups 7 and 8 functional tests shall verify the truth table.

4/ * indicates PDA applies to subgroup 1 and 7.

5/ ** see 4.4.1e.

6/ Δ indicates delta limit (see table IIB) shall be required where specified, and the delta values shall be computed with reference to the previous interim electrical parameters (see line 1).

7/ See 4.4.1d.

TABLE IIB. Delta limits at +25°C.

Test 1/	Device types
	All
I _{LI}	±10% of specified value in table I
I _{LO}	±10% of specified value in table I

1/ The above parameter shall be recorded before and after the required burn-in and life tests to determine the delta Δ.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 43

4.3 Qualification inspection for device classes Q and V. Qualification inspection for device classes Q and V shall be in accordance with MIL-PRF-38535. Inspections to be performed shall be those specified in MIL-PRF-38535 and herein for groups A, B, C, D, and E inspections (see 4.4.1 through 4.4.4).

4.4 Conformance inspection. Technology conformance inspection for classes Q and V shall be in accordance with MIL-PRF-38535 including groups A, B, C, D, and E inspections and as specified herein except where option 2 of MIL-PRF-38535 permits alternate in-line control testing. Quality conformance inspection for device class M shall be in accordance with MIL-PRF-38535, appendix A and as specified herein. Inspections to be performed for device class M shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, D, and E inspections (see 4.4.1 through 4.4.4).

4.4.1 Group A inspection.

- a. Tests shall be as specified in table IIA herein.
- b. Subgroups 5 and 6 of table I of method 5005 of MIL-STD-883 shall be omitted.
- c. For device class M, subgroups 7 and 8 tests shall be sufficient to verify the truth table. For device classes Q and V, subgroups 7 and 8 shall include verifying the functionality of the device; these tests shall have been fault graded in accordance with MIL-STD-883, test method 5012 (see 1.5 herein).
- d. O/V (latch-up) tests shall be measured only for initial qualification and after any design or process changes which may affect the performance of the device. For device class M, procedures and circuits shall be maintained under document revision level control by the manufacturer and shall be made available to the preparing activity or acquiring activity upon request. For device classes Q and V, the procedures and circuits shall be under the control of the device manufacturer's TRB in accordance with MIL-PRF-38535 and shall be made available to the preparing activity or acquiring activity upon request. Testing shall be on all pins, on five devices with zero failures. Latch-up test shall be considered destructive. Information contained in JEDEC Standard number 17 may be used for reference.
- e. Subgroup 4 (C_{IN} and C_{OUT} measurements) shall be measured only for initial qualification and after any process or design changes which may affect input or output capacitance. Capacitance shall be measured between the designated terminal and GND at a frequency of 1 MHz. Sample size is 15 devices with no failures, and all input and output terminals tested.

4.4.2 Group C inspection. The group C inspection end-point electrical parameters shall be as specified in table IIA herein.

4.4.2.1 Additional criteria for device class M. Steady-state life test conditions, method 1005 of MIL-STD-883:

- a. Test condition D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.
- b. $T_A = +125^\circ\text{C}$, minimum.
- c. Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

4.4.2.2 Additional criteria for device classes Q and V. The steady-state life test duration, test condition and test temperature, or approved alternatives shall be as specified in the device manufacturer's QM plan in accordance with MIL-PRF-38535. The test circuit shall be maintained under document revision level control by the device manufacturer's TRB in accordance with MIL-PRF-38535 and shall be made available to the acquiring or preparing activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in test method 1005 of MIL-STD-883.

4.4.3 Group D inspection. The group D inspection end-point electrical parameters shall be as specified in table IIA herein.

4.4.4 Group E inspection. Group E inspection is required only for parts intended to be marked as radiation hardness assured (see 3.5 herein).

- a. End-point electrical parameters shall be as specified in table IIA herein.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 44

- b. For device classes Q and V, the devices or test vehicle shall be subjected to radiation hardness assured tests as specified in MIL-PRF-38535 for the RHA level being tested. For device class M, the devices shall be subjected to radiation hardness assured tests as specified in MIL-PRF-38535, appendix A for the RHA level being tested. All device classes must meet the postirradiation end-point electrical parameter limits as defined in table I at $T_A = +25^\circ\text{C} \pm 5^\circ\text{C}$, after exposure, to the subgroups specified in table IIA herein.
- c. When specified in the purchase order or contract, a copy of the RHA delta limits shall be supplied.

4.5 Delta measurements for device class V. Delta measurements, as specified in table IIA, shall be made and recorded before and after the required burn-in screens and steady-state life tests to determine delta compliance. The electrical parameters to be measured, with associated delta limits are listed in table IIB. The device manufacturer may, at his option, either perform delta measurements or within 24 hours after burn-in perform final electrical parameter tests, subgroups 1, 7, and 9.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38535 for device classes Q and V or MIL-PRF-38535, appendix A for device class M.

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.

6.1.1 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.1.2 Substitutability. Device class Q devices will replace device class M devices.

6.2 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished in accordance with MIL-STD-973 using DD Form 1692, Engineering Change Proposal.

6.3 Record of users. Military and industrial users should inform Defense Supply Center Columbus when a system application requires configuration control and which SMD's are applicable to that system. DSCC will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronic devices (FSC 5962) should contact DSCC-VA, telephone (614) 692-0525.

6.4 Comments. Comments on this drawing should be directed to DSCC-VA, Columbus, Ohio 43216-5000, or telephone (614) 692-0674.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 45

6.5 Symbols, definitions, and functional descriptions.

PIN	DRAM	Transfer	SAM
A0-A8	Row, column address	Row address, tap point	
$\overline{\text{CAS}}$	Column-address strobe, DQ output enable	Tap address strobe	
DQ	DRAM data I/O, Write mask		
DSF	Block-write enable Write-mask-register load enable Color register load enable $\overline{\text{CAS}}$ -before-RAS (option reset)	Split-register transfer enable	
$\overline{\text{RAS}}$	Row-address strobe	Row-address strobe	
SE			SQ output enable, QSF output enable
SC			Serial clock
SQ			Serial data output
TRG	DQ output enable	Transfer enable	
$\overline{\text{WEL}}$, $\overline{\text{WEU}}$	Write enable, write-per-bit enable		
QSF			Serial-register status
NC/GND	Make no external connection or tie to system GND		
V_{CC}	5 V supply 1/		
V_{SS}	Ground 1/		

1/ For proper device operation, all V_{CC} pins must be connected to a 5 V supply, and all V_{SS} pins must be tied to ground.

6.5.1 Timing limits. The table of timing values shows either a minimum or a maximum limit for each parameter. Input requirements are specified from the external system point of view. Thus, address setup time is shown as a minimum since the system must supply at least that much time (even though most devices do not require it). On the other hand, responses from the memory are specified from the device point of view. Thus, the access time is shown as a maximum since the device never provides data later than that time.

STANDARD
MICROCIRCUIT DRAWING
DEFENSE SUPPLY CENTER COLUMBUS
COLUMBUS, OHIO 42316-5000



SIZE
A

5962-95643

REVISION LEVEL
C

SHEET
46

6.5.2 Waveforms.

Waveform symbol	Input	Output
	MUST BE VALID	WILL BE VALID
	CHANGE FROM H TO L	WILL CHANGE FROM H TO L
	CHANGE FROM L TO H	WILL CHANGE FROM L TO H
	DON'T CARE ANY CHANGE PERMITTED	CHANGING STATE UNKNOWN
		HIGH IMPEDANCE

6.6 Sources of supply.

6.6.1 Sources of supply for device classes Q and V. Sources of supply for device classes Q and V are listed in QML-38535. The vendors listed in QML-38535 have submitted a certificate of compliance (see 3.6 herein) to DSCC-VA and have agreed to this drawing.

6.6.2 Approved sources of supply for device class M. Approved sources of supply for class M are listed in MIL-HDBK-103. The vendors listed in MIL-HDBK-103 have agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DSCC-VA.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 47

APPENDIX

FUNCTIONAL ALGORITHMS

10. SCOPE

10.1 Scope. Functional algorithms are test patterns which define the exact sequence of events used to verify proper operation of a random access memory (RAM). Each algorithm serves a specific purpose for the testing of the device. It is understood that all manufacturers do not have the same test equipment; therefore, it becomes the responsibility of each manufacturer to guarantee that the test patterns described herein are followed as closely as possible, or equivalent patterns be used that serve the same purpose. Each manufacturer should demonstrate that this condition will be met. Algorithms shall be applied to the device in a topologically pure fashion. This appendix is a mandatory part of the specification. The information contained herein is intended for compliance.

20. APPLICABLE DOCUMENTS. This section is not applicable to this appendix.

30. ALGORITHMS

30.1 Algorithm A (pattern 1).

30.1.1 Output high impedance (t_{OFF}). This pattern verifies the output buffer switches to high impedance (three-state) within the specified t_{OFF} after the rise of CAS. It is performed in the following manner:

- Step 1: Perform 8 pump cycles.
- Step 2: Load address location with data.
- Step 3: Raise CAS and read address location and guarantee $V_{OL} < V_{OUT} < V_{OH}$ after t_{OFF} delay.

30.2 Algorithm B (pattern 2).

30.2.1 V_{CC} slew. This pattern indicates sense amplifier margin by slewing the supply voltage between memory writing and reading. It is performed in the following manner:

- Step 1: Perform 8 pump cycles.
- Step 2: Load memory with background data with V_{CC} at 4.5 V.
- Step 3: Change V_{CC} to 5.5 V.
- Step 4: Read memory with background data.
- Step 5: Load memory with background data complement.
- Step 6: Change V_{CC} to 4.5 V.
- Step 7: Read memory with background data complement.

30.3 Algorithm C (pattern 3).

30.3.1 March data. This pattern tests for address uniqueness and multiple selection. It is performed in the following manner:

- Step 1: Perform 8 pump cycles.
- Step 2: Load memory with background data.
- Step 3: Read location 0.
- Step 4: Write data complement in location 0.
- Step 5: Repeat steps 3 and 4 for all other locations in the memory (sequentially).
- Step 6: Read data complement in maximum address location.
- Step 7: Write data in maximum address location.
- Step 8: Repeat steps 6 and 7 for all other locations in the memory from maximum to minimum address.
- Step 9: Read data in maximum address location.
- Step 10: Write data complement in maximum address location.
- Step 11: Repeat steps 6 and 7 for all other locations in the memory from maximum to minimum address.
- Step 12: Read memory with data complement.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 48

DSCC FORM 2234
APR 97

9004708 0028608 312

APPENDIX

30.4 Algorithm D (pattern 4).

30.4.1 Refresh test (cell retention) +125°C only. This test is used to check the retention time of the memory cells. It is performed in the following manner:

- Step 1: Perform 8 pump cycles.
- Step 2: Load memory with background data.
- Step 3: Pause t_{REF} (stop all clocks).
- Step 4: Read memory with background data.
- Step 5: Repeat steps 2 through 4 with data complement.

30.5 Algorithm E (pattern 5).

30.5.1 Read-modify-write (RMW). This pattern verifies the Read-modify-write mode for the memory. It is performed in the following manner:

- Step 1: Perform 8 pump cycles.
- Step 2: Load memory with background data.
- Step 3: Read memory with data and load with data complement using RMW cycle.
- Step 4: Repeat step 3 for all address locations.
- Step 5: Repeat steps 2 and 3 using data complement.

30.6 Algorithm F (pattern 6).

30.6.1 Page mode. This pattern verifies the Page mode for the memory. It is performed in the following manner:

- Step 1: Perform 8 pump cycles.
- Step 2: Load first page of memory with background data using Page mode cycle.
- Step 3: Read first page of memory with data and load with data complement using Page mode cycle.
- Step 4: Read first page of memory with data complement and load with data using Page mode cycle.
- Step 5: Repeat steps 2 through 4 for remaining memory locations.

30.7 Algorithm G (pattern 7).

30.7.1 CAS-before-RAS refresh test. This test is used to verify the functionality of the CAS before RAS mode of cell refreshing. It is done at +125°C only and is performed in the following manner:

- Step 1: Perform 8 pump cycles.
- Step 2: Load memory with background data.
- Step 3: Perform 1024 CAS-before-RAS cycles while attempting to modify data.
- Step 4: Read memory with background data.

30.8 Algorithm H (pattern 8).

30.8.1 RAS-only refresh test. This test is used to verify the functionality of the RAS-only mode of cell refreshing. It is done at +125°C only and is performed in the following manner:

- Step 1: Perform 8 pump cycles.
- Step 2: Load memory with background data.
- Step 3: Perform 1024 RAS-only cycles while attempting to modify data.
- Step 4: Repeat step 3 for 1 second.
- Step 5: Read memory with background data.

STANDARD MICROCIRCUIT DRAWING DEFENSE SUPPLY CENTER COLUMBUS COLUMBUS, OHIO 42316-5000	SIZE A		5962-95643
		REVISION LEVEL C	SHEET 49

STANDARD MICROCIRCUIT DRAWING SOURCE APPROVAL BULLETIN

DATE: 97-03-26

Approved sources of supply for SMD 5962-95643 listed below for immediate acquisition only and shall be added to MIL-HDBK-103 and QML-38535 during the next revisions. MIL-HDBK-103 and QML-38535 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DSCC-VA. This bulletin is superseded by the next dated revisions of MIL-HDBK-103 and QML-38535.

Standard microcircuit drawing PIN <u>1</u> /	Vendor CAGE number	Vendor similar PIN <u>2</u> /
5962-9564301QXA	01295	SMJ55166-80GBM
5962-9564301QYC	01295	SMJ55166-80HKCM
5962-9564302QXA	<u>3</u> /	SMJ55166-70GBM
5962-9564302QYC	<u>3</u> /	SMJ55166-70HKCM
5962-9564303QXA	01295	SMJ55166-75GBM
5962-9564303QYC	01295	SMJ55166-75HKCM

- 1/ The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. The device manufacturers listed herein are authorized to supply alternate lead finishes "A", "B", or "C" at their discretion. Contact the listed approved source of supply for further information.
- 2/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.
- 3/ Not available from an approved source of supply.

Vendor CAGE
number

01295

Vendor name
and address

Texas Instruments Incorporated
13500 N. Central Expressway
P.O. Box 655303
Dallas, TX 75265
Point of contact: 1-20 at FM 1788
Midland, TX 79711-0448

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in this information bulletin.

1 of 1

■ 9004708 0028610 T70 ■