


HITACHI SEMICONDUCTOR TECHNICAL UPDATE

| | | | |
|---------------------|---|-----|--------------------------|
| DATE | 8 February 2000 | No. | TN-PLC-350A/E |
| THEME | HD66735 Procedure for setting Standby/Sleep/Display off mode. | | |
| CLASSIFICATION | <input type="checkbox"/> Spec. Change <input checked="" type="checkbox"/> Limitation on Use <input type="checkbox"/> Supplement of Documents | | |
| PRODUCT NAME | HD66735 series, HCD66735 series, HWD66735 series | | |
| REFERENCE DOCUMENTS | LCD Controller/Driver Data Sheet | | Effective Date Long time |
| | | | From Now |


Follow the next procedure when you set standby/sleep/display off mode.

1. Serial interface

i) Standby mode

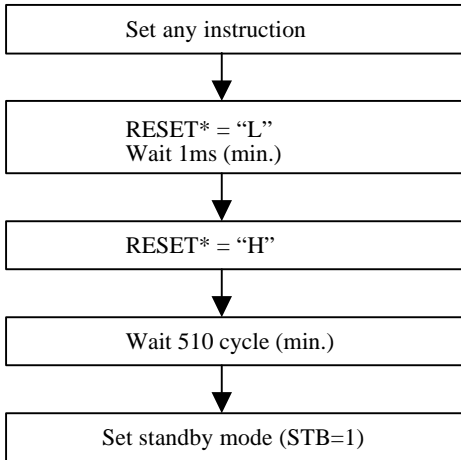

iii) Display off mode (DC=DS=0)

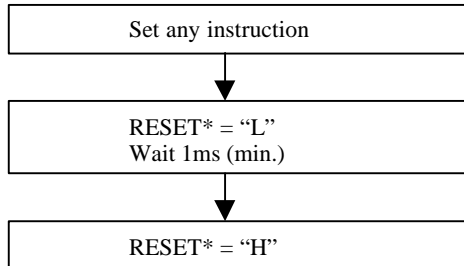

ii) Sleep mode

