


9.6x9.6 Square/ Single Turn /Trimming Potentiometer

-- 3386H --

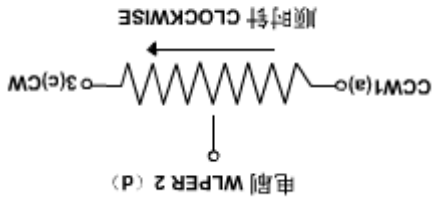

图中公式：除注明外均为±0.25
Tolerance is ± 0.25 if no identification

Electrical Characteristics

Standard Resistance Range.....50Ω~2MΩ
Resistance Tolerance.....±10%
Absolute Minimum Resistance.....≤1%R或
10Ω
Contact Resistance Variation.....CRV≤3%

Insulation Resistance.....R1≥1GΩ
(100Vac)

Withstand Voltage.....600Vac

Effective Travel.....300°

Environmental Characteristics

Power Rating, 315 volts max
0.5W@70°C, 0W@125°C

Temperature Range.....-55°C~125°C

Temperature Coefficient.....±250ppm/°C

Temperature Variation.....55°C, 30min, +125°C

5cycles.....30min
ΔR≤5%R, Δ(Uab/Uac)≤10%

Collision.....100m/s², 1000cycles, ΔR≤2%R



Electrical Endurance at 70°C.....0.5W@70°C

1000h, ΔR≤10%R


Rotational Life.....200cycles
Δ(Uab/Uac)≤10%, CRV≤3% or 5Ω

Physical Characteristics

How To Order

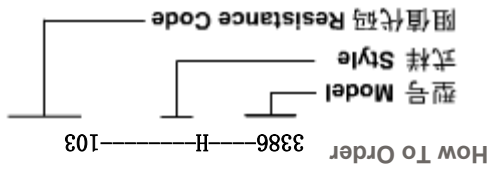

..... Install dimension.....

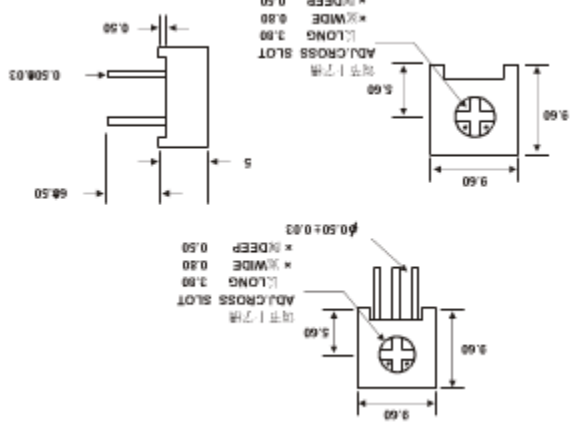

..... Mutual dimension.....

Standard Resistance Table

Resistance Code	Resistance (Ohms)	Resistance Code	
100	10	201	200
200	20	500	50
101	100	101	100
201	200	501	500
102	1,000	102	1,000
202	2,000	502	5,000
103	10,000	103	10,000
203	20,000	503	50,000
104	100,000	104	100,000
204	200,000	504	500,000
105	1,000,000	105	1,000,000
205	2,000,000	505	5,000,000

Special resistances available