


TOLERANCE UNLESS SPECIFIED = .XXX = +/- .005 .XX = +/- .015 FRACTIONS = +/- .032

FP16-375.DC2

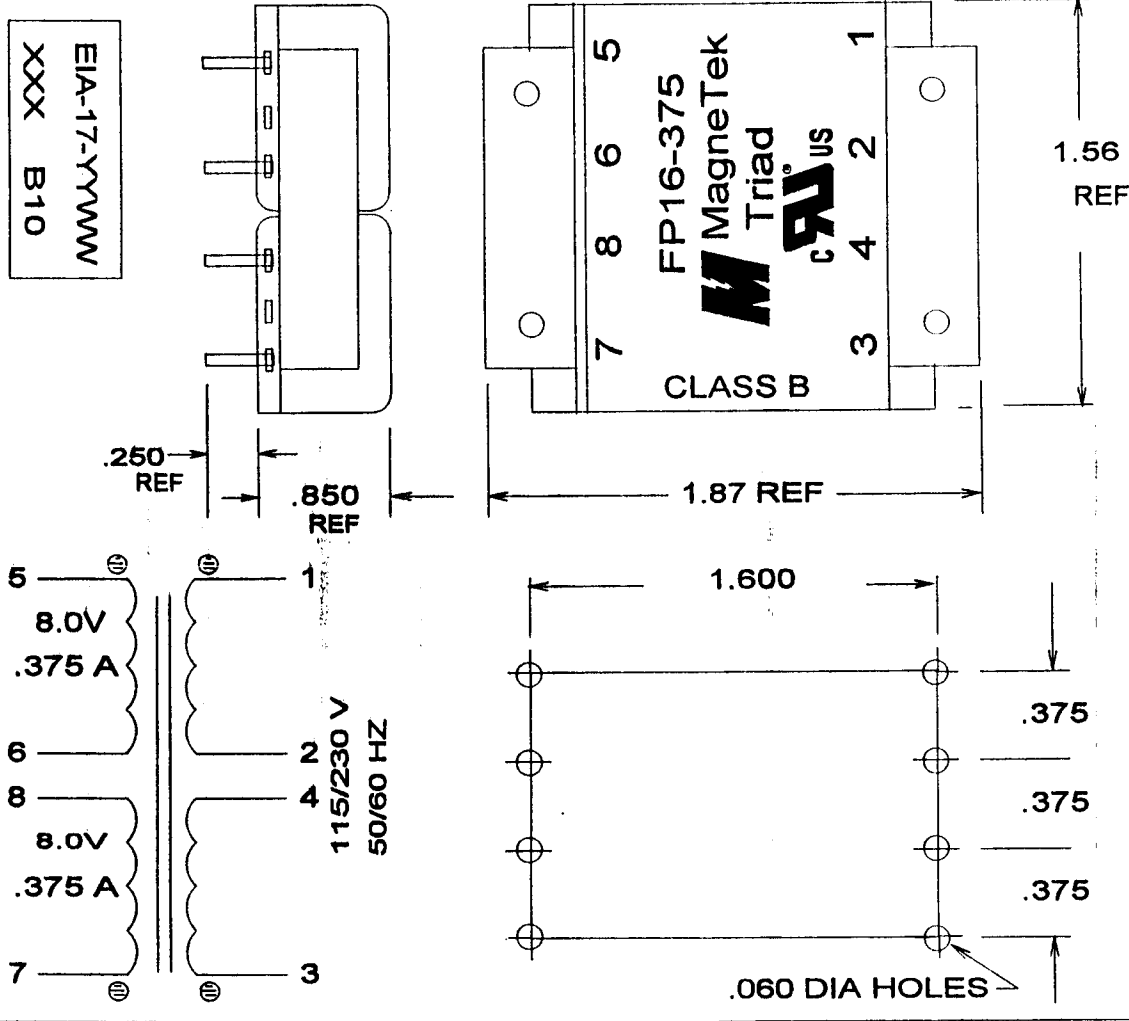

PRODUCTION TESTS

TURNS RATIO = 100%	
DC RESISTANCE IN OHMS NOM	1-2 = 353 TO 432
	3-4 = 353 TO 432
	5-6 = 3.4 TO 4.2
	7-8 = 3.4 TO 4.2

MAX EXCITATION CURRENT = .014 A
 APPLY = 230V, 60 HZ, 1-4, TIE 2+3
 1-2 = 3-4 = 115V
 EACH SEC, 10.6 TO 11.2 V

HIPOT = 2000V, PRI'S TO SEC'S
 1500V PRI'S, SEC'S TO CORE
 500V, PRI TO PRI
 500V, SEC TO SEC

FINAL ASSEMBLY NOTES

MagneTek

PART NO. FP16-375