

**APPLIED
CONCEPTS INC.**

397 Route 281 - P.O. BOX 453
Tully, New York 13159-0453
Phone: (315) 696-6676 Fax: (315) 696-9923
www.acipower.com

AC2-10-1092

PRODUCT DATA SHEET

CCFL INVERTER

(For Multiple Tube Applications)

1/13/00

The AC2-10-1092 is designed to power 4 CCFL's to a nominal power level of 15 watts.

Intensity control (0-100%) is accomplished by the user providing a variable dc level of 0V(off) to 2.5V(full-on) at pin 6 of CON1.

Enable control is accomplished at pin 5 of CON1 (0V=off, 5V=on).

All outputs are open and short circuit protected.

Specifications:

Vin = +10.65V +/- 10%

CCFL strike voltage = 1500Vrms @ Vin=10.65V

CCFL tube current = 7.5mA/tube @ 100% intensity/Vin=10.65V)

Recommended CCFL sustaining voltage = 400Vrms - 600Vrms

Nominal tube current frequency = 57khz +/- 10%

Nominal pwm frequency = 98Hz +/- 3%

Pwm duty cycle range = 0 to 100%

Average electrical efficiency >90%

External PWM signal input control via enable pin

Output PWM sync signal @ pin 8 of CON1


Additional control capability:*

Supports multiple units ie: Master/Slave(s)

Synchronization to display frame-rate

Low power sleep-mode and soft-start

* Please contact factory for information

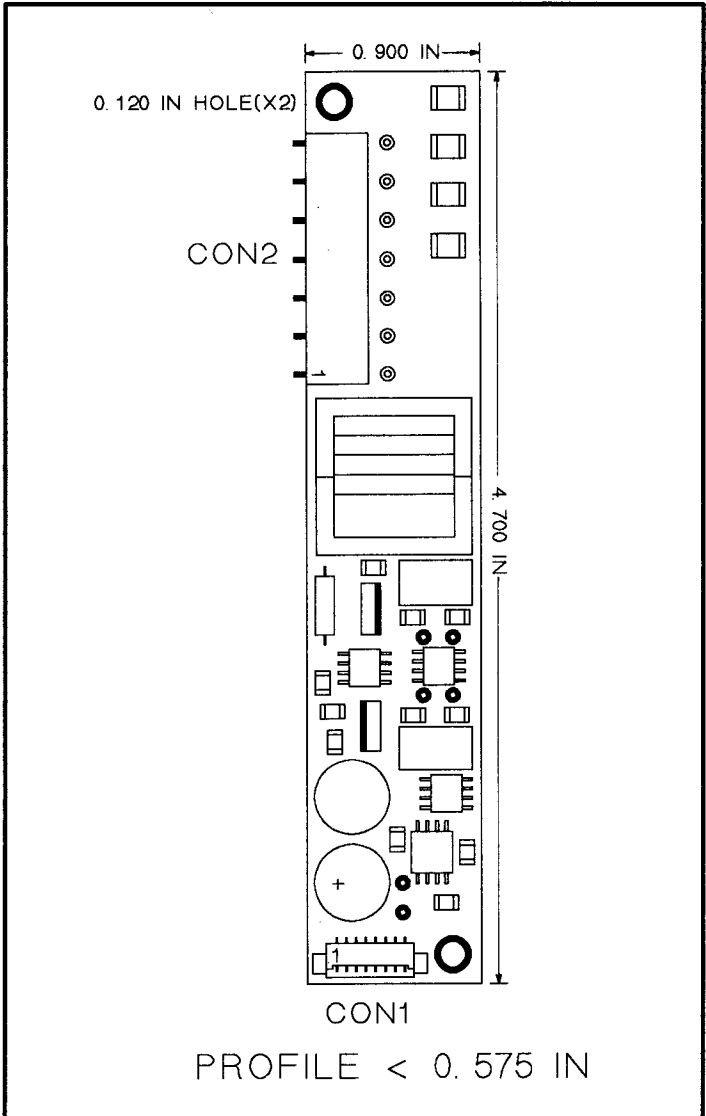

INPUT CONNECTOR CON1 MOLEX 53261-0890		OUTPUT CONNECTOR CON2 MOLEX 22-28-1130	
PIN #	FUNCTION	PIN #	FUNCTION
1	+12V(PWR)	1	CCFL COMMON
2	+12V(PWR)	2	NC
3	GND(PWR)	3	NC
4	GND(PWR)	4	NC
5	ENABLE	5	NC
6	VCNTL	6	NC
7	+5V OUT	7	CCFL4
8	PWM OUT	8	NC
		9	CCFL3
		10	NC
		11	CCFL2
		12	NC
		13	CCFL1