


360 442

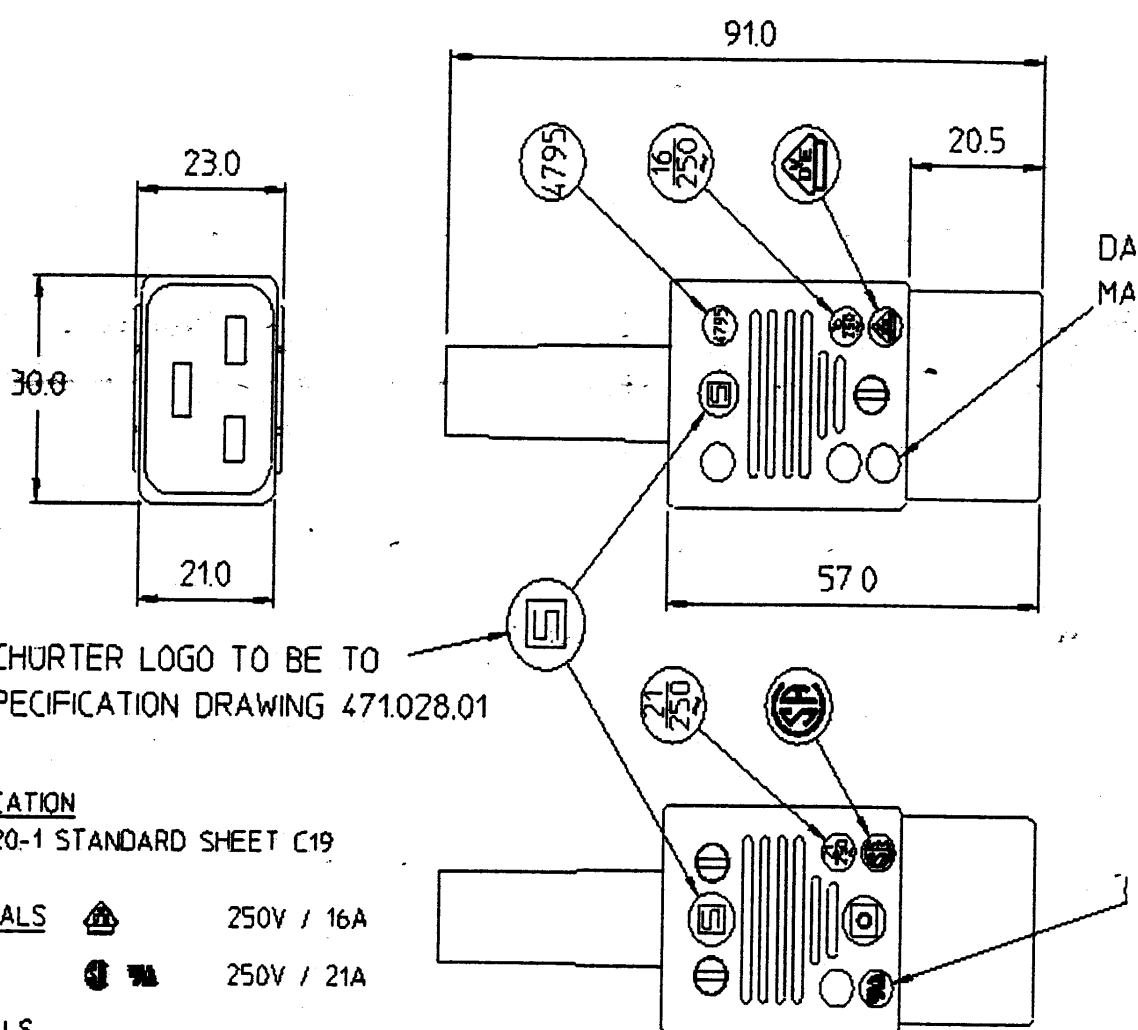

SCHURTER LOGO TO BE TO  
SPECIFICATION DRAWING 471.028.01

#### SPECIFICATION

EN 60320-1 STANDARD SHEET C19

#### APPROVALS



250V / 16A



250V / 21A

#### MATERIALS

BODY MOULDINGS - PA 6 (UL94-V0)  
CONTACTS - BRASS, NICKEL PLATED  
CONTACT SCREWS - STEEL, NICKEL PLATED  
CABLE CLAMP - STEEL, NICKEL PLATED AND PA 6 (UL94-V0)  
CABLE CLAMP SCREWS - STEEL, NICKEL PLATED  
COVER SCREW - STEEL, NICKEL PLATED  
INSERT - STEEL, NICKEL PLATED  
CABLE GUARD - PVC (UL94-V0)

#### FEATURES

REVERSIBLE CABLE  
ALLOWS FOR THE

| ISS. | MOD. & DATE | 4 | 14.6.00 | TOLERANCES              | NATL                                             | SCALE   |
|------|-------------|---|---------|-------------------------|--------------------------------------------------|---------|
| 1    | 18.1.00     | 5 | 17.8.00 | XX +/- 0.4              | SEE ABOVE                                        | DO NOT  |
| 2    | 15.3.00     |   |         | XXX +/- 0.1             | FINISH                                           | USED ON |
| 3    | 23.03.00    |   |         | UNLESS STATED OTHERWISE |                                                  |         |
|      |             |   |         | DIMS IN MM              | <b>SCHURTER</b> LTD. BOGNOR REGS. UNITED KINGDOM | SHT. 1  |