




JC050H, JC075H, JC100H Power Modules: dc-dc Converters; 18 to 36 Vdc Input, 24 Vdc Output; 50 W to 100 W

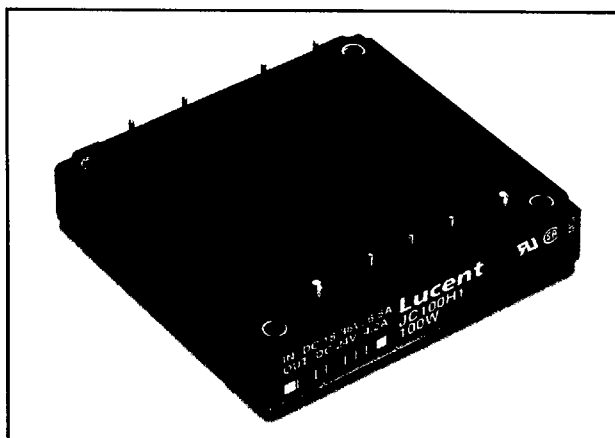

The JC050H, JC075H, JC100H Power Modules use advanced surface-mount technology and deliver high-quality, efficient, and compact dc-dc conversion.

Applications

- Distributed power architectures
- Workstations
- EDP equipment
- Telecommunications

Options

- Choice of remote on/off logic configuration
- Heat sink available for extended operation
- Short leads: 2.79 mm (0.110 in.)
3.68 mm (0.145 in.)

Description

The JC050H, JC075H, JC100H Power Modules are dc-dc converters that operate over an input voltage range of 18 Vdc to 36 Vdc and provide a precisely regulated dc output. The outputs are fully isolated from the inputs, allowing versatile polarity configurations and grounding connections. The modules have maximum power ratings from 50 W to 100 W at a typical full-load efficiency of 86%.

The sealed modules offer a metal baseplate for excellent thermal performance. Threaded-through holes are provided to allow easy mounting or addition of a heat sink for high-temperature applications. The standard feature set includes remote sensing, output trim, and remote on/off for convenient flexibility in distributed power applications.

Features

- Small size: 61.0 mm x 57.9 mm x 13.1 mm (2.40 in. x 2.28 in. x 0.52 in.)
- High power density
- High efficiency: 86% typical
- Low output noise
- Constant frequency
- Industry-standard pinout
- Metal baseplate
- 2:1 input voltage range
- Overtemperature protection (100 W only)
- Remote sense
- Remote on/off
- Adjustable output voltage
- Case ground pin
- UL* Recognized, CSA† Certified, VDE Licensed

* UL is a registered trademark of Underwriters Laboratories, Inc.

† CSA is a registered trademark of the Canadian Standards Assn.

Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operations sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

| Parameter | Symbol | Min | Max | Unit |
|---|----------------|-----|------|------|
| Input Voltage: | | | | |
| Continuous | V_i | — | 40 | Vdc |
| Transient (100 ms) | $V_{i, trans}$ | — | 50 | Vdc |
| I/O Isolation Voltage | — | — | 1500 | Vdc |
| Operating Case Temperature (See Thermal Considerations section.) | T_c | -40 | 100 | °C |
| Storage Temperature | T_{stg} | -40 | 110 | °C |

Electrical Specifications

Unless otherwise indicated, specifications apply over all operating input voltage, resistive load, and temperature conditions.

Table 1. Input Specifications

| Parameter | Symbol | Min | Typ | Max | Unit |
|--|--------------|-----|-----|-----|------------------|
| Operating Input Voltage | V_i | 18 | 28 | 36 | Vdc |
| Maximum Input Current ($V_i = 0$ V to 36 V; $I_o = I_{o, max}$): | | | | | |
| JC050H (See Figure 1.) | $I_{i, max}$ | — | — | 5.0 | A |
| JC075H (See Figure 2.) | $I_{i, max}$ | — | — | 7.0 | A |
| JC100H (See Figure 3.) | $I_{i, max}$ | — | — | 8.0 | A |
| Inrush Transient | i^2t | — | — | 2.0 | A ² s |
| Input Reflected-ripple Current, Peak-to-peak (5 Hz to 20 MHz, 12 μ H source impedance; see Figure 11.) | — | — | 150 | — | mAp-p |
| Input Ripple Rejection (120 Hz) | — | — | 60 | — | dB |

Fusing Considerations

CAUTION: This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of a sophisticated power architecture. To preserve maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse. The safety agencies require a normal-blow, dc fuse with a maximum rating of 20 A (see Safety Considerations section). Based on the information provided in this data sheet on inrush energy and maximum dc input current, the same type of fuse with a lower rating can be used. Refer to the fuse manufacturer's data for further information.

Electrical Specifications (continued)

Table 2. Output Specifications

| Parameter | Device | Symbol | Min | Typ | Max | Unit |
|--|--------|---------------------|-------|------|-------|-----------------------|
| Output Voltage (Over all operating input voltage, resistive load, and temperature conditions until end of life. See Figure 13.) | All | V_o | 23.28 | — | 24.72 | Vdc |
| Output Voltage Set Point ($V_i = 28$ V; $I_o = I_{o, \max}$; $T_c = 25$ °C) | All | $V_{o, \text{set}}$ | 23.55 | — | 24.45 | Vdc |
| Output Regulation: | | | | | | |
| Line ($V_i = 18$ V to 36 V) | All | — | — | 0.01 | 0.1 | % |
| Load ($I_o = I_{o, \min}$ to $I_{o, \max}$) | All | — | — | 0.05 | 0.2 | % |
| Temperature ($T_c = -40$ °C to $+100$ °C) | All | — | — | 100 | 300 | mV |
| Output Ripple and Noise Voltage (See Figure 12.): | | | | | | |
| RMS | All | — | — | — | 150 | mVrms |
| Peak-to-peak (5 Hz to 20 MHz) | All | — | — | — | 400 | mVp-p |
| External Load Capacitance (electrolytic) | All | — | 0 | — | 5,000 | μF |
| Output Current: | | | | | | |
| (At $I_o < I_{o, \min}$, the modules may exceed output ripple specifications.) | JC050H | I_o | 0.3 | — | 2.1 | A |
| | JC075H | I_o | 0.3 | — | 3.1 | A |
| | JC100H | I_o | 0.3 | — | 4.2 | A |
| Output Current-limit Inception ($V_o = 90\%$ of $V_{o, \text{nom}}$) | JC050H | $I_{o, \text{cli}}$ | 2.2 | 2.4 | 2.7 | A |
| | JC075H | $I_{o, \text{cli}}$ | 3.3 | 3.6 | 4.0 | A |
| | JC100H | $I_{o, \text{cli}}$ | 4.4 | 4.8 | 5.5 | A |
| Output Short-circuit Current ($V_o = 250$ mV) | All | — | — | 170 | — | % $I_{o, \max}$ |
| Efficiency ($V_i = 28$ V; $I_o = I_{o, \max}$; $T_c = 70$ °C) | JC050H | η | 83.5 | 85.5 | — | % |
| | JC075H | η | 85.0 | 87.0 | — | % |
| | JC100H | η | 85.0 | 87.0 | — | % |
| Dynamic Response ($\Delta I_o / \Delta t = 1$ A/10 μs, $V_i = 28$ V, $T_c = 25$ °C): | | | | | | |
| Load Change from $I_o = 50\%$ to 75% of $I_{o, \max}$ | | | | | | |
| Peak Deviation | All | — | — | 3 | — | % $V_{o, \text{set}}$ |
| Settling Time ($V_o < 10\%$ of peak deviation) | All | — | — | 300 | — | μs |
| Load Change from $I_o = 50\%$ to 25% of $I_{o, \max}$ | | | | | | |
| Peak Deviation | All | — | — | 3 | — | % $V_{o, \text{set}}$ |
| Settling Time ($V_o < 10\%$ of peak deviation) | All | — | — | 300 | — | μs |

Table 3. Isolation Specifications

| Parameter | Min | Typ | Max | Unit |
|-----------------------|-----|------|-----|------|
| Isolation Capacitance | — | 2500 | — | pF |
| Isolation Resistance | 10 | — | — | MΩ |

General Specifications

| Parameter | Min | Typ | Max | Unit |
|---|-----|-----------|-----------|---------|
| Calculated MTBF ($I_o = 80\%$ of $I_{o, max}$; $T_c = 40^\circ\text{C}$) | | 3,000,000 | | hr. |
| Weight | — | — | 100 (3.5) | g (oz.) |


Feature Specifications

Unless otherwise indicated, specifications apply over all operating input voltage, resistive load, and temperature conditions. See Feature Descriptions for additional information.

| Parameter | Symbol | Min | Typ | Max | Unit |
|---|----------------|------|-----|------|------------------|
| Remote On/Off Signal Interface ($V_i = 0\text{ V}$ to 36 V ; open collector or equivalent compatible; signal referenced to $V_i(-)$ terminal; see Figure 14 and Feature Descriptions.): JCxxxH1 Preferred Logic: Logic Low—Module On Logic High—Module Off JCxxxH Optional Logic: Logic Low—Module Off Logic High—Module On Logic Low: At $I_{on/off} = 1.0\text{ mA}$ At $V_{on/off} = 0.0\text{ V}$ Logic High: At $I_{on/off} = 0.0\text{ }\mu\text{A}$ At $V_{on/off} = 15\text{ V}$ Turn-on Time (See Figure 10.) ($I_o = 80\%$ of $I_{o, max}$; V_o within $\pm 1\%$ of steady state) | | | | | |
| | $V_{on/off}$ | 0 | — | 1.2 | V |
| | $I_{on/off}$ | — | — | 1.0 | mA |
| | $V_{on/off}$ | — | — | 15 | V |
| | $I_{on/off}$ | — | — | 50 | μA |
| | — | — | 20 | 35 | ms |
| Output Voltage Adjustment (See Feature Descriptions.): Output Voltage Remote-sense Range Output Voltage Set-point Adjustment Range (trim) | | | | | |
| | — | — | — | 2.5 | V |
| | — | 60 | — | 110 | $\%V_{o, nom}$ |
| Output Overvoltage Clamp | $V_{o, clamp}$ | 27.4 | — | 30.6 | V |
| Overtemperature Shutdown (100 W only; see Feature Descriptions.) | T_c | — | 105 | — | $^\circ\text{C}$ |


Characteristic Curves

The following figures provide typical characteristics for the JC050H, JC075H, JC100H power modules. The figures are identical for both on/off configurations.

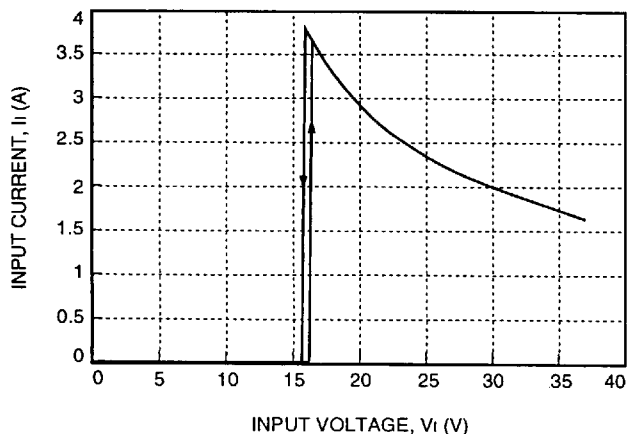


8-1259 (C).b

Figure 1. Typical JC050H Input Characteristics at Room Temperature, $I_o = 2.1$ A

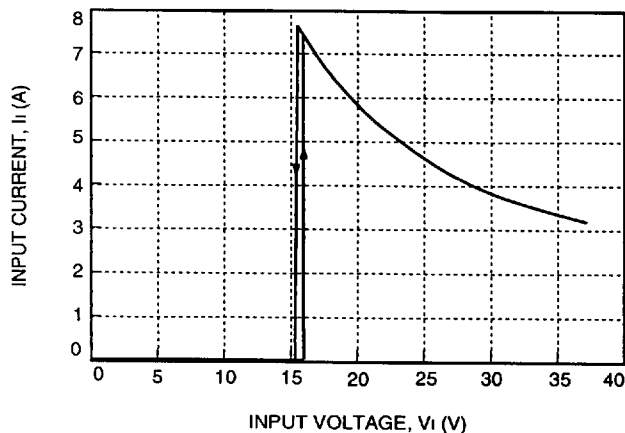


8-1259 (C).c

Figure 3. Typical JC100H Input Characteristics at Room Temperature, $I_o = 4.2$ A

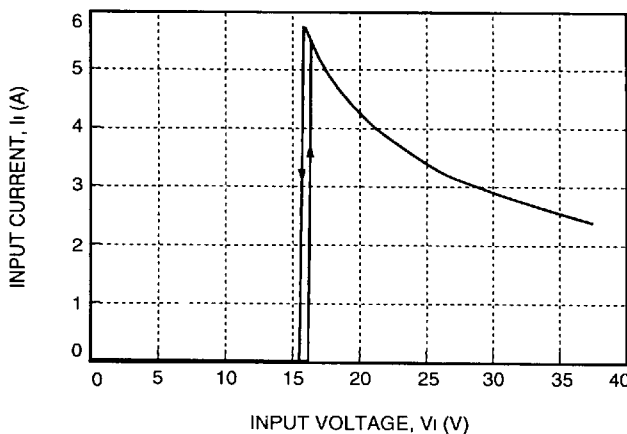

8-1259 (C).a

Figure 2. Typical JC075H Input Characteristics at Room Temperature, $I_o = 3.1$ A

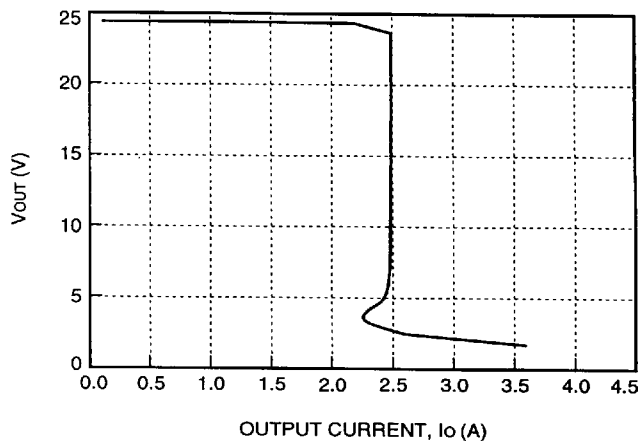

8-1286 (C)

Figure 4. Typical JC050H Output Characteristics at Room Temperature, $V_{IN} = 28$ V

Characteristic Curves (continued)

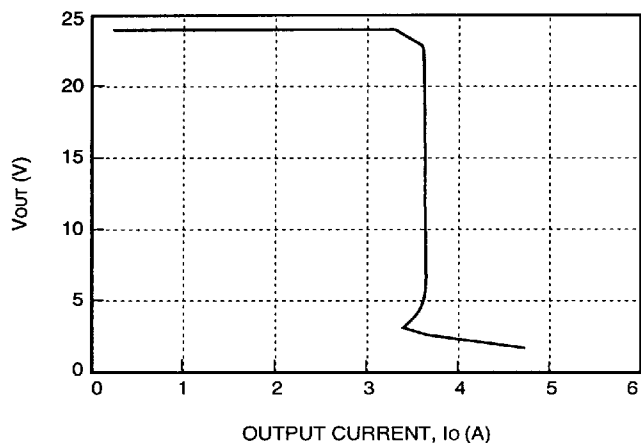


Figure 5. Typical JC075H Output Characteristics at Room Temperature, $V_{IN} = 28$ V

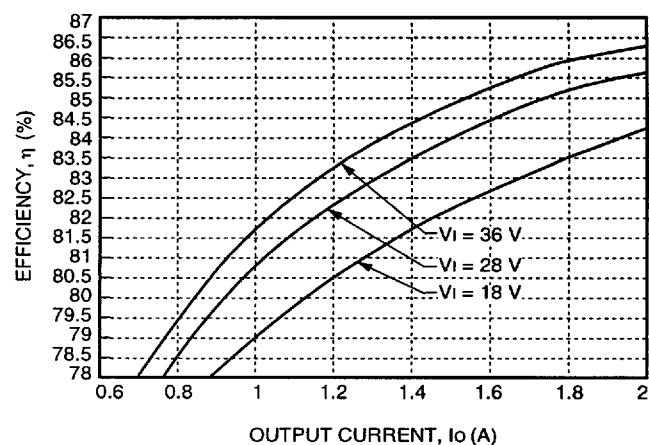


Figure 7. Typical JC050H Converter Efficiency vs. Output Current at Room Temperature

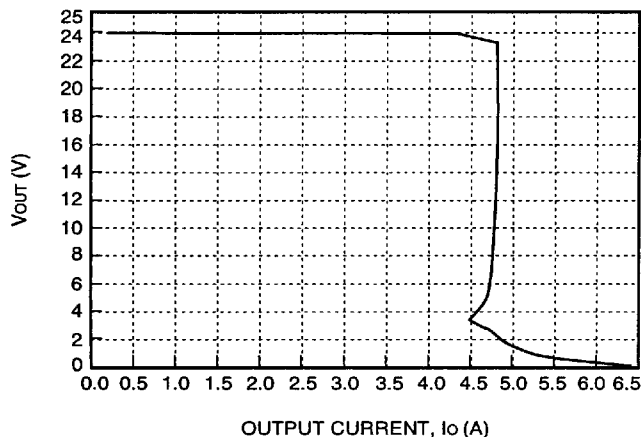


Figure 6. Typical JC100H Output Characteristics at Room Temperature, $V_{IN} = 28$ V


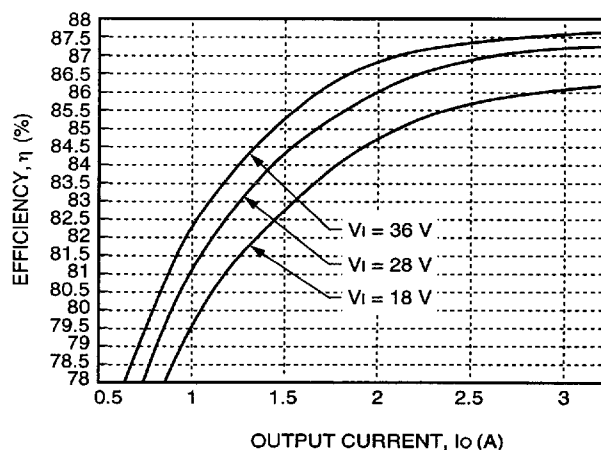



Figure 8. Typical JC075H Converter Efficiency vs. Output Current at Room Temperature

Characteristic Curves (continued)

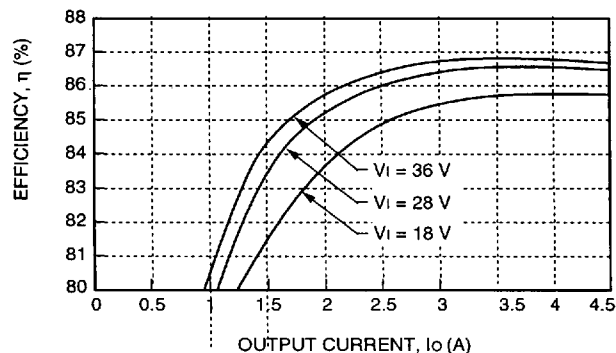

8-1133 (C).c


Figure 9. Typical JC100H Converter Efficiency vs. Output Current at Room Temperature

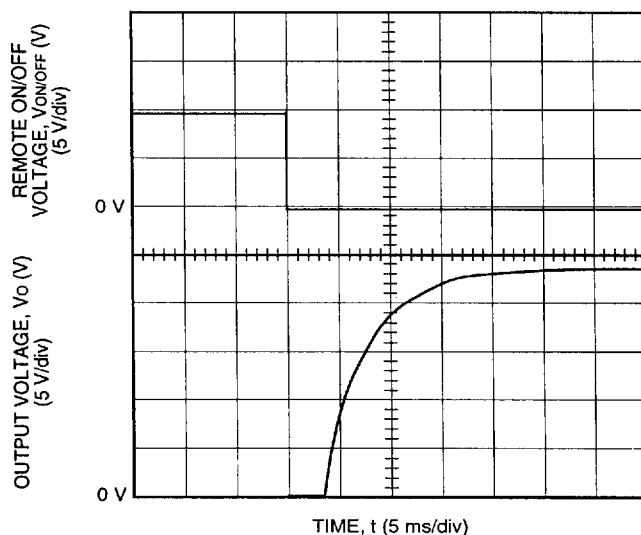

8-1565 (C)

Figure 10. Typical Start-Up from Remote On/Off JCxxxH1; I_o = Full Load


Test Configurations

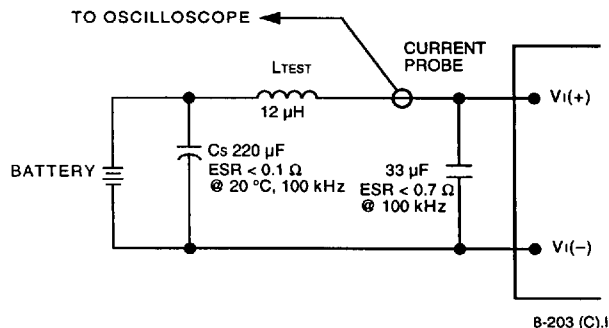

8-203 (C).l

Note: Measure input reflected-ripple current with a simulated source inductance (L_{TEST}) of 12 μ H. Capacitor C_s offsets possible battery impedance. Measure current as shown above.

Figure 11. Input Reflected-Ripple Test Setup

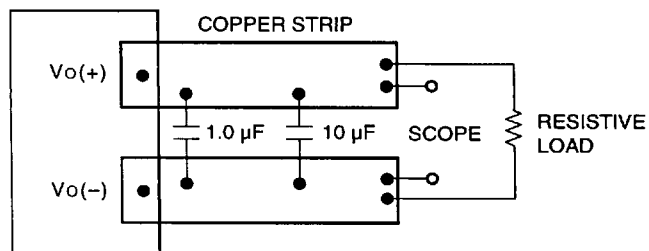


8-513 (C).d

Note: Use a 1.0 μ F ceramic capacitor and a 10 μ F aluminum or tantalum capacitor. Scope measurement should be made using a BNC socket. Position the load between 51 mm and 76 mm (2 in. and 3 in.) from the module.

Figure 12. Peak-to-Peak Output Noise Measurement Test Setup

Test Configurations (continued)

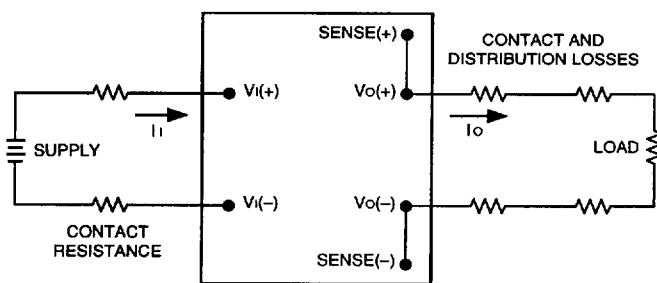

8-749 (C)

Note: All measurements are taken at the module terminals. When socketing, place Kelvin connections at module terminals to avoid measurement errors due to socket contact resistance.

$$\eta = \left(\frac{[V_o(+)-V_o(-)]I_o}{[V_i(+)-V_i(-)]I_i} \right) \times 100$$

Figure 13. Output Voltage and Efficiency Measurement Test Setup

Design Considerations

Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module. For the test configuration in Figure 11, a 33 μ F electrolytic capacitor (ESR < 0.7 Ω at 100 kHz) mounted close to the power module helps ensure stability of the unit. For other highly inductive source impedances, consult the factory for further application guidelines.

Safety Considerations

For safety-agency approval of the system in which the power module is used, the power module must be installed in compliance with the spacing and separation requirements of the end-use safety agency standard, i.e., UL-1950, CSA 22.2-950, and EN60950.

For the converter output to be considered meeting the requirements of safety extra-low voltage (SELV), the input must meet SELV requirements.

If the input meets extra-low voltage (ELV) requirements, then the converter's output is considered ELV.

The input to these units is to be provided with a maximum 20 A normal-blow fuse in the ungrounded lead.

Electrical Descriptions

Current Limit

To provide protection in a fault (output overload) condition, the unit is equipped with internal current-limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. If the output voltage is pulled very low during a severe fault, the current-limit circuit can exhibit either foldback or tailout characteristics (output current decrease or increase). The unit operates normally once the output current is brought back into its specified range.

Feature Descriptions

Remote On/Off

Two remote on/off options are available. Positive logic remote on/off turns the module on during a logic high voltage on the ON/OFF pin, and off during a logic low. Negative logic remote on/off turns the module off during a logic high and on during a logic low. Negative logic (code suffix "1") is the factory-preferred configuration.

To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the Vi(-) terminal ($V_{on/off}$). The switch can be an open collector or equivalent (see Figure 14). A logic low is $V_{on/off} = 0$ V to 1.2 V. The maximum $I_{on/off}$ during a logic low is 1 mA. The switch should maintain a logic-low voltage while sinking 1 mA.

During a logic high, the maximum $V_{on/off}$ generated by the power module is 15 V. The maximum allowable leakage current of the switch at $V_{on/off} = 15$ V is 50 μ A.

If not using the remote on/off feature, do one of the following:

- For negative logic, short ON/OFF pin to Vi(-).
- For positive logic, leave ON/OFF pin open.

Feature Descriptions (continued)

Output Voltage Set-Point Adjustment
(Trim) (continued)

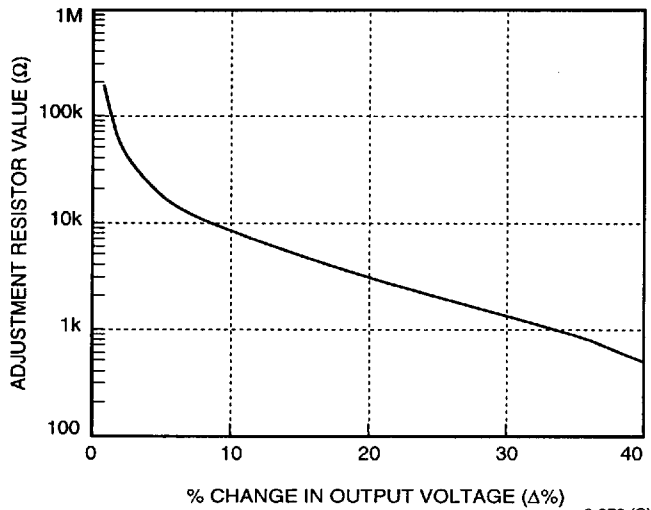


Figure 17. Resistor Selection for Decreased Output Voltage 8-879 (C)

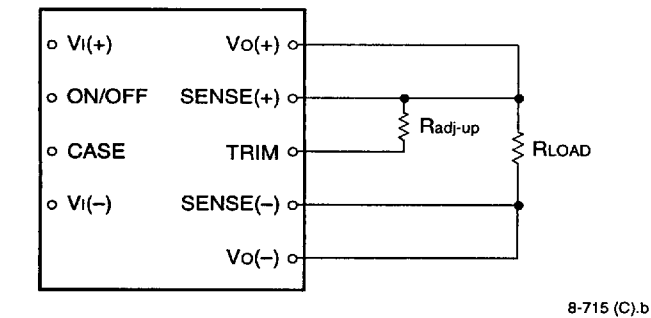


Figure 18. Circuit Configuration to Increase Output Voltage

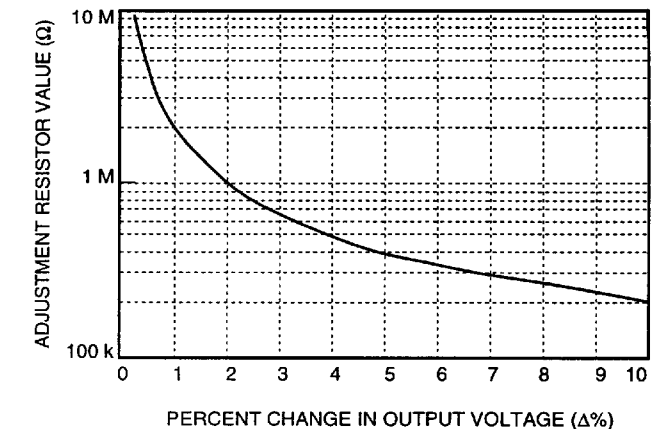


Figure 19. Resistor Selection for Increased Output Voltage 8-1294 (C)

Output Overvoltage Clamp

The output overvoltage clamp consists of control circuitry, independent of the primary regulation loop, that monitors the voltage on the output terminals. The control loop of the clamp has a higher voltage set point than the primary loop (see Feature Specifications table). This provides a redundant voltage control that reduces the risk of output overvoltage.

Overtemperature Protection (Shutdown)

The 100 W module features an overtemperature protection circuit to safeguard against thermal damage. The circuit shuts down the module when the maximum case temperature is exceeded. The module restarts automatically after cooling.


Thermal Considerations

Introduction

The power modules operate in a variety of thermal environments; however, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat-dissipating components inside the unit are thermally coupled to the case. Heat is removed by conduction, convection, and radiation to the surrounding environment. Proper cooling can be verified by measuring the case temperature. Peak temperature (T_c) occurs at the position indicated in Figure 20.

Thermal Considerations (continued)

Introduction (continued)

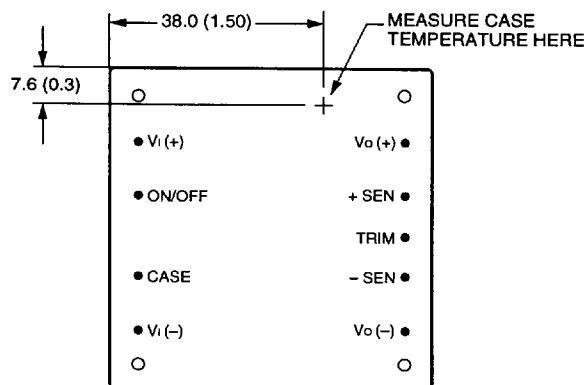

Note: Top view, pin locations are for reference.
Measurements shown in millimeters and (inches).

Figure 20. Case Temperature Measurement Location

The temperature at this location should not exceed 100 °C. The output power of the module should not exceed the rated power for the module as listed in the Ordering Information table.

Although the maximum case temperature of the power modules is 100 °C, you can limit this temperature to a lower value for extremely high reliability.

For additional information on these modules, refer to the Lucent Technologies *Thermal Management JC-, JFC-, JW-, and JFW-Series 50 W to 150 W Board-Mounted Power Modules Technical Note* (TN97-008EPS).

Heat Transfer Without Heat Sinks

Increasing airflow over the module enhances the heat transfer via convection. Figure 21 shows the maximum power that can be dissipated by the module without exceeding the maximum case temperature versus local ambient temperature (T_A) for natural convection through 4 m/s (800 ft./min.).

Note that the natural convection condition was measured at 0.05 m/s to 0.1 m/s (10 ft./min. to 20 ft./min.); however, systems in which these power modules may be used typically generate natural convection airflow rates of 0.3 m/s (60 ft./min.) due to other heat dissipating components in the system. The use of Figure 21 is shown in the following example.

Example

What is the minimum airflow necessary for a JC100H operating at nominal line, an output current of 4.2 A, and a maximum ambient temperature of 40 °C?

Solution

Given: $V_i = 28$ V
 $I_o = 4.2$ A
 $T_A = 40$ °C

Determine P_D (Use Figure 24.):

$$P_D = 16$$
 W

Determine Airflow (v) (Use Figure 21.):

$$v = 1.75$$
 m/s (350 ft./min.)

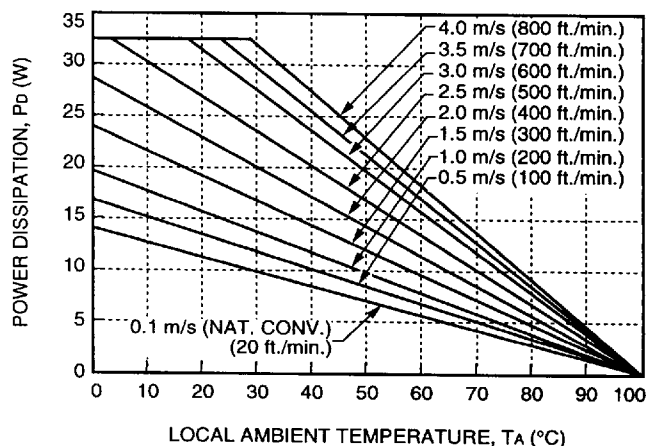


Figure 21. Forced Convection Power Derating with No Heat Sink; Either Orientation

Thermal Considerations (continued)

Heat Transfer Without Heat Sinks (continued)

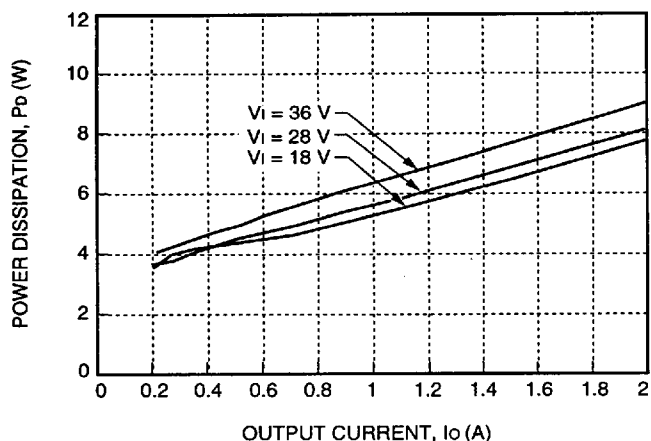


Figure 22. JC050H Power Dissipation vs. Output Current

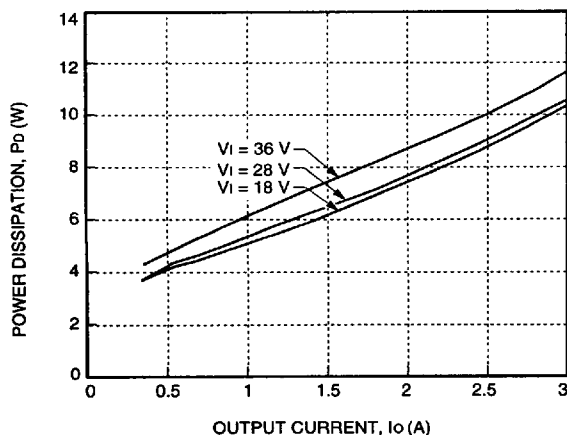


Figure 23. JC075H Power Dissipation vs. Output Current

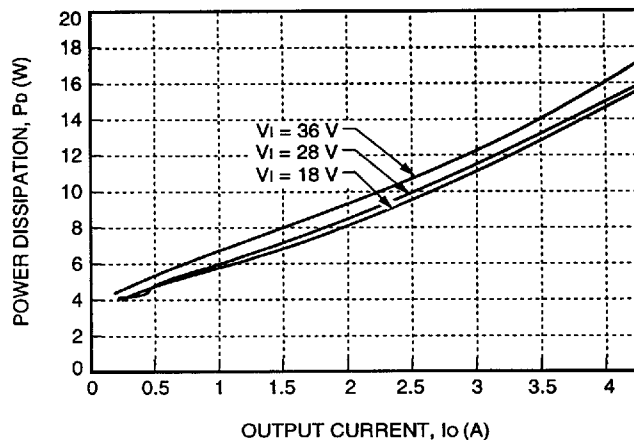


Figure 24. JC100H Power Dissipation vs. Output Current

8-1188 (C).a

Heat Transfer with Heat Sinks

The power modules have through-threaded, M3 x 0.5 mounting holes, which enable heat sinks or cold plates to attach to the module. The mounting torque must not exceed 0.56 N-m (5 in.-lb.).

Thermal derating with heat sinks is expressed by using the overall thermal resistance of the module. Total module thermal resistance (θ_{ca}) is defined as the maximum case temperature rise ($\Delta T_{c, \max}$) divided by the module power dissipation (P_D):

$$\theta_{ca} = \left[\frac{\Delta T_{c, \max}}{P_D} \right] = \left[\frac{(T_c - T_A)}{P_D} \right]$$

The location to measure case temperature (T_c) is shown in Figure 20. Case-to-ambient thermal resistance vs. airflow is shown, for various heat sink configurations and heights, in Figure 25. These curves were obtained by experimental testing of heat sinks, which are offered in the product catalog.

Thermal Considerations (continued)

Heat Transfer With Heat Sinks (continued)

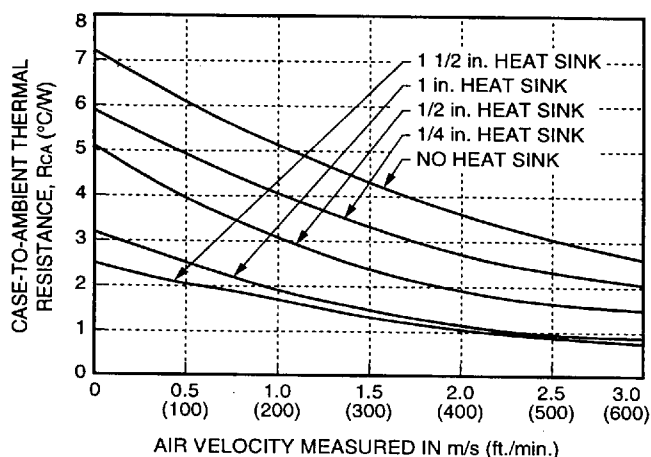


Figure 25. Case-to-Ambient Thermal Resistance Curves; Either Orientation

These measured resistances are from heat transfer from the sides and bottom of the module as well as the top side with the attached heat sink; therefore, the case-to-ambient thermal resistances shown are generally lower than the resistance of the heat sink by itself. The module used to collect the data in Figure 25 had a thermal-conductive dry pad between the case and the heat sink to minimize contact resistance. The use of Figure 25 is shown in the following example.

Example

If an 85 °C case temperature is desired, what is the minimum airflow necessary? Assume the JC100H module is operating at nominal line and an output current of 4.2 A, maximum ambient air temperature of 40 °C, and the heat sink is 0.5 in.

Solution

Given: $V_i = 28 \text{ V}$
 $I_o = 4.2 \text{ A}$
 $T_A = 40 \text{ °C}$
 $T_c = 85 \text{ °C}$
 Heat sink = 0.5 in.

Determine P_D by using Figure 24:

$$P_D = 16 \text{ W}$$

Then solve the following equation:

$$\theta_{ca} = \left[\frac{(T_c - T_A)}{P_D} \right]$$

$$\theta_{ca} = \left[\frac{(85 - 40)}{16} \right]$$

$$\theta_{ca} = 2.8 \text{ °C/W}$$


Use Figure 25 to determine air velocity for the 0.5 inch heat sink.

The minimum airflow necessary for the JC100H module is 1.1 m/s (220 ft./min.).

Thermal Considerations (continued)

Custom Heat Sinks

A more detailed model can be used to determine the required thermal resistance of a heat sink to provide necessary cooling. The total module resistance can be separated into a resistance from case-to-sink (θ_{cs}) and sink-to-ambient (θ_{sa}) shown below (Figure 26):



8-1304 (C)

Figure 26. Resistance from Case-to-Sink and Sink-to-Ambient

For a managed interface using thermal grease or foils, a value of $\theta_{cs} = 0.1\text{ }^{\circ}\text{C/W}$ to $0.3\text{ }^{\circ}\text{C/W}$ is typical. The solution for heat sink resistance is:

$$\theta_{sa} = \left[\frac{(T_c - T_A)}{P_D} \right] - \theta_{cs}$$

This equation assumes that all dissipated power must be shed by the heat sink. Depending on the user-defined application environment, a more accurate model, including heat transfer from the sides and bottom of the module, can be used. This equation provides a conservative estimate for such instances.

Layout Considerations


Copper paths must not be routed beneath the power module mounting inserts.

Outline Diagram


Dimensions are in millimeters and (inches).

Tolerances: $x.x \text{ mm} \pm 0.5 \text{ mm}$ ($x.xx \text{ in.} \pm 0.02 \text{ in.}$)
 $x.xx \text{ mm} \pm 0.25 \text{ mm}$ ($x.xxx \text{ in.} \pm 0.010 \text{ in.}$)


Top View

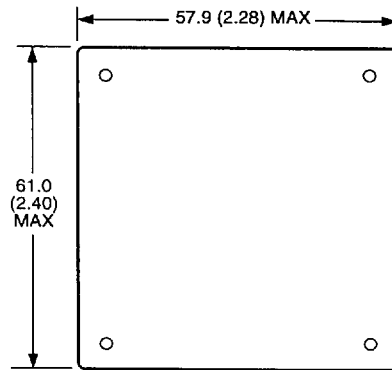

Side View

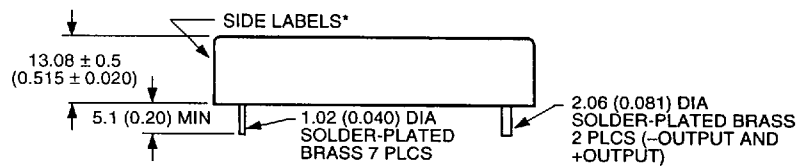

Bottom View

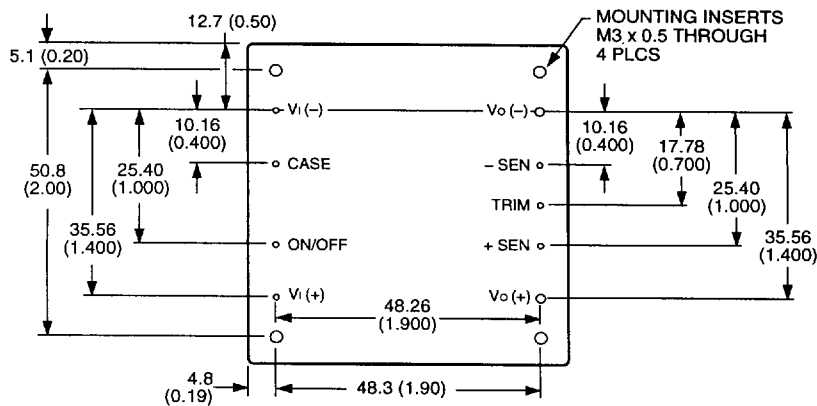


8-1190 (C)

* Side labels include Lucent logo, product designation, safety agency markings, input/output voltage and current ratings, and bar code.

Recommended Hole Pattern

Component-side footprint.

Dimensions are in millimeters and (inches).

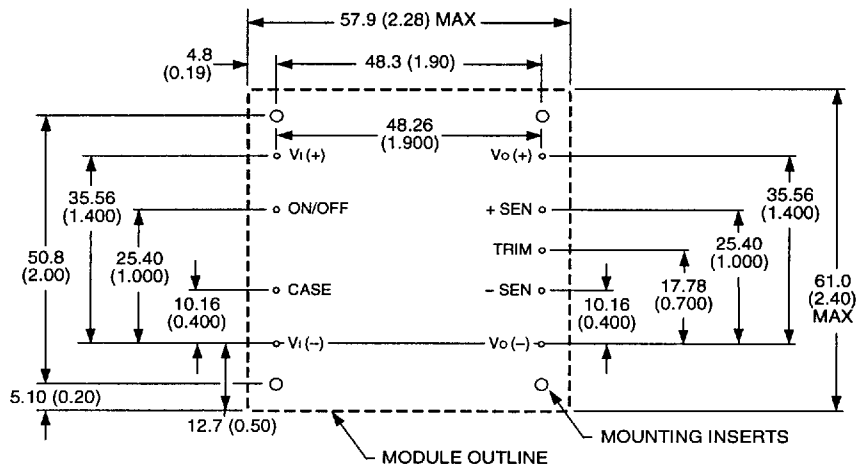

8-1190 (C)

Ordering Information

| Input Voltage | Output Voltage | Output Power | Remote On/Off Logic | Device Code | Comcode |
|---------------|----------------|--------------|---------------------|-------------|-----------|
| 28 V | 24.0 V | 50 W | negative | JC050H1 | 108080979 |
| 28 V | 24.0 V | 75 W | negative | JC075H1 | TBD |
| 28 V | 24.0 V | 100 W | negative | JC100H1 | 107437543 |
| 28 V | 24.0 V | 50 W | positive | JC050H | 108080953 |
| 28 V | 24.0 V | 75 W | positive | JC075H | TBD |
| 28 V | 24.0 V | 100 W | positive | JC100H | 107309981 |

Optional Features

Optional features can be ordered using the suffixes shown in Table 4. The suffixes follow the last letter of the device code and are placed in descending order. For example, the device codes for a JC100H module with the following options are shown below:

| | |
|----------------------------------|----------|
| Positive logic | JC100H |
| Negative logic | JC100H1 |
| Positive logic and 2.79 mm leads | JC100H8 |
| Negative logic and 2.79 mm leads | JC100H81 |
| Negative logic and 3.68 mm leads | JC100H61 |

Table 4. Module Options and Suffixes

| Option | Suffix |
|--------------------------------|--------|
| Short lead 2.79 mm (0.110 in.) | 8 |
| Short lead 3.68 mm (0.145 in.) | 6 |
| Negative remote on/off logic | 1 |
| Positive remote on/off logic | — |