
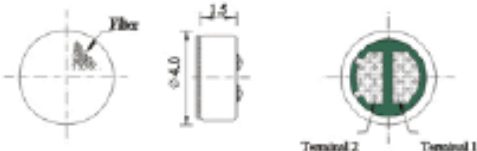

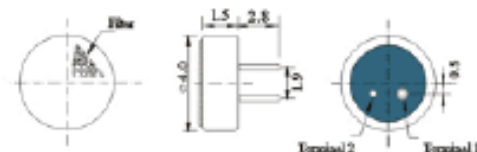

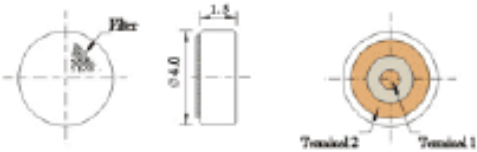




Dimensions and material


<p>PMO4015SNQ</p> 	
<p>PMO4015PNQ</p> 	
<p>PMO4015LNQ</p> 	

Electrical Characteristics

Model Number	PMO4015SNQ	PMO4015PNQ	PMO4015LNQ
Sensitivity Range		-44 ± 3dB -48 ± 3dB -46 ± 3dB -50 ± 3dB	
Directivity		Omnidirectional	
Impedance		Low Impedance	
Current Consumption		Max. 0.5mA	
Standard Operation Voltage		2.0V	
Sensitivity Reduction		Within-3dB at 1.5V	
S/N Ratio		More than 58dB	

DB LECTRO^U_Z

Frequency Response

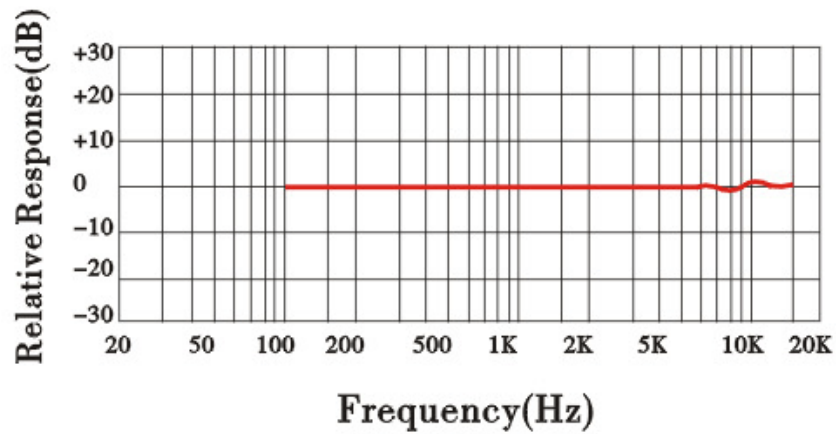

Schematic Diagram

