

## ULS-2064H THROUGH ULS-2077H 1.25 A QUAD DARLINGTON SWITCHES

MIL-STD-883 Compliant


### FEATURES

- TTL, DTL, PMOS, or CMOS Compatible Units
- Transient-Protected Outputs
- Hermetically Sealed Packages
- High-Reliability Screening to MIL-STD-883, Class B

INTENDED FOR MILITARY, aerospace, and related applications, ULS-2064H through ULS-2077H quad Darlington switches interface between low-level logic and a variety of peripheral power loads such as relays, solenoids, dc and stepping motors, multiplexed LED and incandescent displays, heaters, and similar loads of up to 400 watts (1.25 A per output, 80 V, 12.5% duty cycle, +50°C). The devices are specified with a minimum output breakdown of 50 volts (35 volts sustaining at 100 mA) or 80 volts (50 volts sustaining), and a saturated output current specification of 1.25 A.

The ULS-2064/65/68/69H switches are designed for use with TTL, DTL, Schottky TTL, and 5 V CMOS logic. The ULS-2066/67/70/77H are intended for use with 6 V to 15 V CMOS and PMOS logic. These devices include integral transient-suppression diodes for use with inductive loads.

Types ULS-2068H and ULS-2069H incorporate a pre-driver stage operating from a low-current, 5 V



Dwg. No. A-11,025


ULS-2064H—ULS-2067H

supply. The pre-driver for the ULS-2070H and ULS-2071H operates from a low-current, 12 V supply. The input drive requirements for these devices are reduced, while still allowing the outputs to switch currents up to 1.5 A.

The ULS-2074H through ULS-2077H switches are intended for use in emitter-follower applications. These circuits are identical with the ULS-2064H through ULS-2067H except for the uncommitted emitters and the omission of the suppression diodes.


Reverse-bias burn-in and 100% high-reliability screening are standard for all side-brazed hermetic

*Continued next page*



Dwg. No. A-11,026

ULS-2068H—ULS-2071H



Dwg. No. A-11,027

ULS-2074H—ULS-2077H

6

# ULS-2064H THROUGH ULS-2077H

## 1.25 A QUAD DARLINGTON SWITCHES

integrated circuits from Sprague Electric Company. Those devices previously manufactured as the ULS-2064H through ULS-2077H are now screened to the additional requirements of MIL-STD-883, Class B, and are so marked.


These quad Darlington switches are supplied in 16-pin ceramic/metal side-brazed hermetic pack-

ages. On special order, economical ceramic/glass cer-DIP hermetic packages can be specified by changing the part number suffix from 'H' to 'R'. Both package styles conform to the dimensional requirements of MIL-M-38510 and are rated for operation over the military temperature range of  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

### ABSOLUTE MAXIMUM RATINGS at $25^{\circ}\text{C}$ Free-Air Temperature for any one driver (unless otherwise noted)

Output Voltage, $V_{\text{CEX}}$ .....	See Below
Output Sustaining Voltage, $V_{\text{CE(SUS)}}$ .....	See Below
Output Current, $I_{\text{OUT}}$ (Note 1) .....	1.5 A
Input Voltage, $V_{\text{IN}}$ (Note 2) .....	See Below
Input Current, $I_{\text{B}}$ (Note 3) .....	25 mA
Supply Voltage, $V_{\text{S}}$ (ULS-2068/69H) .....	10 V
(ULS-2070/71H) .....	20 V
Total Package Power Dissipation .....	See Graph
Power Dissipation, $P_{\text{D}}$ /Output .....	2.2 W
Operating Ambient Temperature Range, $T_{\text{A}}$ ..	$-55^{\circ}\text{C}$ to $+125^{\circ}\text{C}$
Storage Temperature Range, $T_{\text{S}}$ .....	$-65^{\circ}\text{C}$ to $+150^{\circ}\text{C}$

### ALLOWABLE PACKAGE POWER DISSIPATION AS A FUNCTION OF TEMPERATURE

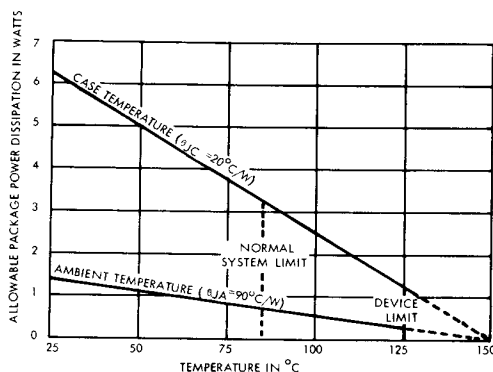


Type Number	$V_{\text{CEX}}$ (Max.)	$V_{\text{CE(SUS)}}$ (Min.)	$V_{\text{IN}}$ (Max.)	Application
ULS-2064H	50 V	35 V	15 V	TTL, DTL, Schottky TTL, and 5 V CMOS
ULS-2065H	80 V	50 V	15 V	
ULS-2066H	50 V	35 V	30 V	6 to 15 V CMOS and PMOS
ULS-2067H	80 V	50 V	30 V	
ULS-2068H	50 V	35 V	15 V	TTL, DTL, Schottky TTL, and 5 V CMOS
ULS-2069H	80 V	50 V	15 V	
ULS-2070H	50 V	35 V	30 V	6 to 15 V CMOS and PMOS
ULS-2071H	80 V	50 V	30 V	
ULS-2074H	50 V	35 V	30 V	General-Purpose
ULS-2075H	80 V	50 V	60 V	
ULS-2076H	50 V	35 V	30 V	6 to 15 V CMOS and PMOS
ULS-2077H	80 V	50 V	60 V	

Notes:

1. Allowable combinations of output current, number of outputs conducting, and duty cycle are shown on following pages.
2. Input voltage is with reference to the substrate (no connection to any other pins) for the ULS-2074/75/76/77H, reference is ground for all other types.
3. Input current may be limited by maximum allowable input voltage.


## ULS-2064H THROUGH ULS-2067H

### PARTIAL SCHEMATIC



Dwg. No. A-10.353


ULS-2064H  $R_{IN} = 350 \Omega$   
 ULS-2065H  
 ULS-2066H  $R_{IN} = 3 \text{ k}\Omega$   
 ULS-2067H



Dwg No A-11.025


## ULS-2068H THROUGH ULS-2071H

### PARTIAL SCHEMATIC

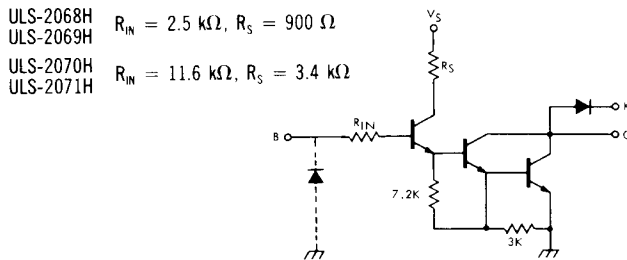

Dwg. No. A-10.354


ULS-2068H  $R_{IN} = 2.5 \text{ k}\Omega$ ,  $R_S = 900 \Omega$   
 ULS-2069H  
 ULS-2070H  $R_{IN} = 11.6 \text{ k}\Omega$ ,  $R_S = 3.4 \text{ k}\Omega$   
 ULS-2071H



Dwg No A-11.026


## ULS-2074H THROUGH ULS-2077H

### PARTIAL SCHEMATIC



Dwg No. A-10.355

ULS-2074H  $R_{IN} = 350 \Omega$   
 ULS-2075H  
 ULS-2076H  $R_{IN} = 3 \text{ k}\Omega$   
 ULS-2077H



Dwg. No. A-11.027

**ULS-2064H THROUGH ULS-2067H**

**ELECTRICAL CHARACTERISTICS over operating temperature range (unless otherwise noted)**

Characteristic	Symbol	Applicable Devices	Test Conditions			Limits			
			Temp.	Electrical Conditions	Fig.	Min.	Max.	Units	
Output Leakage Current	$I_{CEX}$	ULS-2064/66H		$V_{CE} = 50\text{ V}$	1	—	500	$\mu\text{A}$	
		ULS-2065/67H		$V_{CE} = 80\text{ V}$	1	—	500	$\mu\text{A}$	
Output Sustaining Voltage	$V_{CE(SUS)}$	ULS-2064/66H		$I_C = 100\text{ mA}, V_{IN} = 0.4\text{ V}$	2	35	—	V	
		ULS-2065/67H		$I_C = 100\text{ mA}, V_{IN} = 0.4\text{ V}$	2	50	—	V	
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	All	- 55°C	$I_C = 500\text{ mA}, I_B = 1.1\text{ mA}$	3	—	1.35	V	
				$I_C = 750\text{ mA}, I_B = 1.7\text{ mA}$	3	—	1.55	V	
				$I_C = 1.0\text{ A}, I_B = 2.25\text{ mA}$	3	—	1.75	V	
				$I_C = 1.25\text{ A}, I_B = 3.75\text{ mA}$	3	—	1.95	V	
				$I_C = 500\text{ mA}, I_B = 625\text{ }\mu\text{A}$	3	—	1.20	V	
				$I_C = 750\text{ mA}, I_B = 935\text{ }\mu\text{A}$	3	—	1.35	V	
			+ 25°C	$I_C = 1.0\text{ A}, I_B = 1.25\text{ mA}$	3	—	1.55	V	
				$I_C = 1.25\text{ A}, I_B = 2.0\text{ mA}$	3	—	1.75	V	
				+ 125°C	$I_C = 500\text{ mA}, I_B = 625\text{ }\mu\text{A}$	3	—	1.35	V
					$I_C = 750\text{ mA}, I_B = 935\text{ }\mu\text{A}$	3	—	1.55	V
					$I_C = 1.0\text{ A}, I_B = 1.25\text{ mA}$	3	—	1.75	V
				$I_C = 1.25\text{ A}, I_B = 2.0\text{ mA}$	3	—	1.95	V	
Input Current	$I_{IN(ON)}$	ULS-2064/65H		$V_{IN} = 2.4\text{ V}$	4	—	4.3	mA	
				$V_{IN} = 3.75\text{ V}$	4	—	9.6	mA	
		ULS-2066/67H		$V_{IN} = 5.0\text{ V}$	4	—	1.8	mA	
				$V_{IN} = 12\text{ V}$	4	—	5.2	mA	
Input Voltage	$V_{IN(ON)}$	ULS-2064/65H	- 55°C	$V_{CE} = 2.0\text{ V}, I_C = 1.0\text{ A}$	5	—	3.1	V	
			+ 25°C	$V_{CE} = 2.0\text{ V}, I_C = 1.0\text{ A}$	5	—	2.0	V	
		ULS-2066/67H	- 55°C	$V_{CE} = 2.0\text{ V}, I_C = 1.0\text{ A}$	5	—	11.5	V	
			+ 25°C	$V_{CE} = 2.0\text{ V}, I_C = 1.0\text{ A}$	5	—	6.5	V	
Turn-On Delay	$t_{PHL}$	All	+ 25°C		9	—	1.0	$\mu\text{s}$	
Turn-Off Delay	$t_{FLH}$	All	+ 25°C		9	—	1.5	$\mu\text{s}$	
Clamp Diode Leakage Current	$I_R$	ULS-2064/66H		$V_R = 50\text{ V}$	6	—	100	$\mu\text{A}$	
		ULS-2065/67H		$V_R = 80\text{ V}$	6	—	100	$\mu\text{A}$	
Clamp Diode Forward Voltage	$V_F$	All		$I_F = 1.25\text{ A}$	7	—	2.1	V	

## ULS-2068H THROUGH ULS-2071H

**ELECTRICAL CHARACTERISTICS** over operating temperature range,  
 $V_s = 5.0\text{ V}$  (ULS-2068/69H) or  $V_s = 12\text{ V}$  (ULS-2070/71H), (unless otherwise noted)

Characteristic	Symbol	Applicable Devices	Test Conditions			Limits		
			Temp.	Electrical Conditions	Fig.	Min.	Max.	Units
Output Leakage Current	$I_{CEX}$	ULS-2068/70H		$V_{CE} = 50\text{ V}$	1	—	500	$\mu\text{A}$
		ULS-2069/71H		$V_{CE} = 80\text{ V}$	1	—	500	$\mu\text{A}$
Output Sustaining Voltage	$V_{CE(SUS)}$	ULS-2068/70H		$I_C = 100\text{ mA}, V_{IN} = 0.4\text{ V}$	2	35	—	V
		ULS-2069/71H		$I_C = 100\text{ mA}, V_{IN} = 0.4\text{ V}$	2	50	—	V
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	ULS-2068/69H	-55°C	$I_C = 500\text{ mA}, V_{IN} = 3.2\text{ V}$	3	—	1.35	V
				$I_C = 750\text{ mA}, V_{IN} = 3.2\text{ V}$	3	—	1.55	V
				$I_C = 1.0\text{ A}, V_{IN} = 3.2\text{ V}$	3	—	1.75	V
				$I_C = 1.25\text{ A}, V_{IN} = 3.2\text{ V}$	3	—	1.95	V
			+25°C	$I_C = 500\text{ mA}, V_{IN} = 2.9\text{ V}$	3	—	1.20	V
				$I_C = 750\text{ mA}, V_{IN} = 2.9\text{ V}$	3	—	1.35	V
				$I_C = 1.0\text{ A}, V_{IN} = 2.9\text{ V}$	3	—	1.55	V
				$I_C = 1.25\text{ A}, V_{IN} = 2.9\text{ V}$	3	—	1.75	V
			+125°C	$I_C = 500\text{ mA}, V_{IN} = 2.8\text{ V}$	3	—	1.35	V
				$I_C = 750\text{ mA}, V_{IN} = 2.8\text{ V}$	3	—	1.55	V
				$I_C = 1.0\text{ A}, V_{IN} = 2.8\text{ V}$	3	—	1.75	V
				$I_C = 1.25\text{ A}, V_{IN} = 2.8\text{ V}$	3	—	1.95	V
		ULS-2070/71H	-55°C	$I_C = 500\text{ mA}, V_{IN} = 5.5\text{ V}$	3	—	1.35	V
				$I_C = 750\text{ mA}, V_{IN} = 5.5\text{ V}$	3	—	1.55	V
				$I_C = 1.0\text{ A}, V_{IN} = 5.5\text{ V}$	3	—	1.75	V
				$I_C = 1.25\text{ A}, V_{IN} = 5.5\text{ V}$	3	—	1.95	V
			+25°C	$I_C = 500\text{ mA}, V_{IN} = 5.1\text{ V}$	3	—	1.20	V
				$I_C = 750\text{ mA}, V_{IN} = 5.1\text{ V}$	3	—	1.35	V
				$I_C = 1.0\text{ A}, V_{IN} = 5.1\text{ V}$	3	—	1.55	V
				$I_C = 1.25\text{ A}, V_{IN} = 5.1\text{ V}$	3	—	1.75	V
			+125°C	$I_C = 500\text{ mA}, V_{IN} = 5.0\text{ V}$	3	—	1.35	V
				$I_C = 750\text{ mA}, V_{IN} = 5.0\text{ V}$	3	—	1.55	V
				$I_C = 1.0\text{ A}, V_{IN} = 5.0\text{ V}$	3	—	1.75	V
				$I_C = 1.25\text{ A}, V_{IN} = 5.0\text{ V}$	3	—	1.95	V
Input Current	$I_{IN(ON)}$	ULS-2068/69H	-55°C	$V_{IN} = 3.2\text{ V}$	4	—	600	$\mu\text{A}$
			+25°C	$V_{IN} = 2.75\text{ V}$	4	—	550	$\mu\text{A}$
			+125°C	$V_{IN} = 2.75\text{ V}$	4	—	850	$\mu\text{A}$
				$V_{IN} = 3.75\text{ V}$	4	—	1400	$\mu\text{A}$
		ULS-2070/71H	-55°C to +25°C	$V_{IN} = 5.0\text{ V}$	4	—	400	$\mu\text{A}$
				$V_{IN} = 12\text{ V}$	4	—	1250	$\mu\text{A}$
			+125°C	$V_{IN} = 5.0\text{ V}$	4	—	800	$\mu\text{A}$
				$V_{IN} = 12\text{ V}$	4	—	1600	$\mu\text{A}$
Input Voltage	$V_{IN(ON)}$	ULS-2068/69H	-55°C	$V_{CE} = 2.0\text{ V}, I_C = 1.0\text{ A}$	5	—	3.2	V
			+25°C	$V_{CE} = 2.0\text{ V}, I_C = 1.0\text{ A}$	5	—	2.75	V
		ULS-2070/71H	-55°C	$V_{CE} = 2.0\text{ V}, I_C = 1.0\text{ A}$	5	—	5.0	V
			+25°C	$V_{CE} = 2.0\text{ V}, I_C = 1.0\text{ A}$	5	—	5.0	V
Supply Current	$I_S$	ULS-2068/69H		$I_C = 500\text{ mA}, V_{IN} = 3.2\text{ V}$	8	—	6.0	mA
		ULS-2070/71H	-55°C to +25°C	$I_C = 500\text{ mA}, V_{IN} = 5.0\text{ V}$	8	—	4.5	mA
				$I_C = 500\text{ mA}, V_{IN} = 5.0\text{ V}$	8	—	6.0	mA
Turn-On Delay	$t_{PHL}$	All	+25°C		9	—	1.0	$\mu\text{s}$
Turn-Off Delay	$t_{PLH}$	All	+25°C		9	—	1.5	$\mu\text{s}$
Clamp Diode Leakage Current	$I_R$	ULS-2068/70H		$V_R = 50\text{ V}$	6	—	100	$\mu\text{A}$
		ULS-2069/71H		$V_R = 80\text{ V}$	6	—	100	$\mu\text{A}$
Clamp Diode Forward Voltage	$V_F$	All		$I_F = 1.25\text{ A}$	7	—	2.1	V


6

## ULS-2074H THROUGH ULS-2077H

### ELECTRICAL CHARACTERISTICS over operating temperature range (unless otherwise noted)


Characteristic	Symbol	Applicable Devices	Test Conditions			Limits		
			Temp.	Electrical Conditions	Fig.	Min.	Max.	Units
Output Leakage Current	$I_{CEX}$	ULS-2074/76H		$V_{CE} = 50\text{ V}$	1	—	500	$\mu\text{A}$
		ULS-2075/77H		$V_{CE} = 80\text{ V}$	1	—	500	$\mu\text{A}$
Output Sustaining Voltage	$V_{CE(SUS)}$	ULS-2074/76H		$I_C = 100\text{ mA}, V_{IN} = 0.4\text{ V}$	2	35	—	V
		ULS-2075/77H		$I_C = 100\text{ mA}, V_{IN} = 0.4\text{ V}$	2	50	—	V
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	All	- 55°C	$I_C = 500\text{ mA}, I_B = 1.1\text{ mA}$	3	—	1.35	V
				$I_C = 750\text{ mA}, I_B = 1.7\text{ mA}$	3	—	1.55	V
				$I_C = 1.0\text{ A}, I_B = 2.25\text{ mA}$	3	—	1.75	V
				$I_C = 1.25\text{ A}, I_B = 3.75\text{ mA}$	3	—	1.95	V
			+ 25°C	$I_C = 500\text{ mA}, I_B = 625\text{ }\mu\text{A}$	3	—	1.20	V
				$I_C = 750\text{ mA}, I_B = 935\text{ }\mu\text{A}$	3	—	1.35	V
				$I_C = 1.0\text{ A}, I_B = 1.25\text{ mA}$	3	—	1.55	V
				$I_C = 1.25\text{ A}, I_B = 2.0\text{ mA}$	3	—	1.75	V
			+ 125°C	$I_C = 500\text{ mA}, I_B = 625\text{ }\mu\text{A}$	3	—	1.35	V
				$I_C = 750\text{ mA}, I_B = 935\text{ }\mu\text{A}$	3	—	1.55	V
				$I_C = 1.0\text{ A}, I_B = 1.25\text{ mA}$	3	—	1.75	V
				$I_C = 1.25\text{ A}, I_B = 2.0\text{ mA}$	3	—	1.95	V
Input Current	$I_{IN(ON)}$	ULS-2074/75H		$V_{IN} = 2.4\text{ V}$	4	—	4.3	mA
				$V_N = 3.75\text{ V}$	4	—	9.6	mA
		ULS-2076/77H		$V_{IN} = 5.0\text{ V}$	4	—	1.8	mA
				$V_{IN} = 12\text{ V}$	4	—	5.2	mA
Input Voltage	$V_{IN(ON)}$	ULS-2074/75H	- 55°C	$V_{CE} = 2.0\text{ V}, I_C = 1.0\text{ A}$	5	—	3.1	V
			+ 25°C	$V_{CE} = 2.0\text{ V}, I_C = 1.0\text{ A}$	5	—	2.0	V
		ULS-2076/77H	- 55°C	$V_{CE} = 2.0\text{ V}, I_C = 1.0\text{ A}$	5	—	11.5	V
			+ 25°C	$V_{CE} = 2.0\text{ V}, I_C = 1.0\text{ A}$	5	—	6.5	V
Turn-On Delay	$t_{DHL}$	All	+ 25°C		9	—	1.0	$\mu\text{s}$
Turn-Off Delay	$t_{DLH}$	All	+ 25°C		9	—	1.5	$\mu\text{s}$

**TEST FIGURES**




**Figure 1**

Dwg. No. A-9729A




**Figure 2**

Dwg. No. A-10,350




**Figure 3**

Dwg. No. A-10,349




**Figure 4**

Dwg. No. A-9732




**Figure 5**

Dwg. No. A-9734A




**Figure 6**

Dwg. No. A-9735A



**Figure 7**

Dwg. No. A-9736




**Figure 8**

Dwg. No. A-10,351


NOTE: Diodes not applicable to Types ULS-2074H through ULS-2077H.

**ULS-2064H THROUGH ULS-2077H  
1.25 A QUAD DARLINGTON SWITCHES**

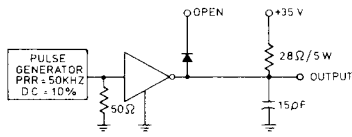

Dwg. No. A-13,247


ULS-2064/65/68/69/74/75H  $V_{in}$  2.4V  
 ULS-2066/67/70/71/76/77H 5.0V



Dwg. No. A-13,248


**Figure 9**

**COLLECTOR CURRENT  
AS A FUNCTION OF INPUT CURRENT**

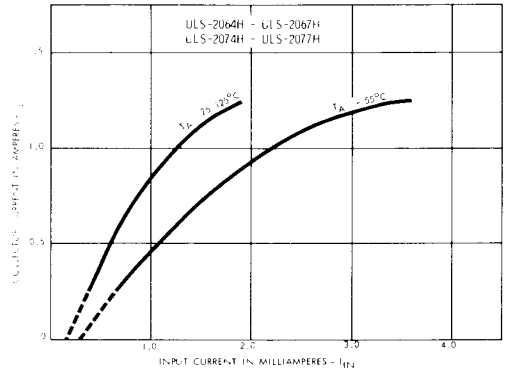


Dwg. No. A-11,030

**INPUT CURRENT AS A FUNCTION OF INPUT VOLTAGE**

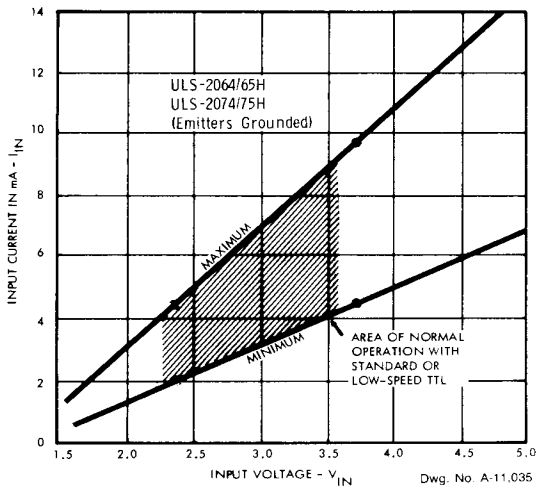


Dwg. No. A-11,035

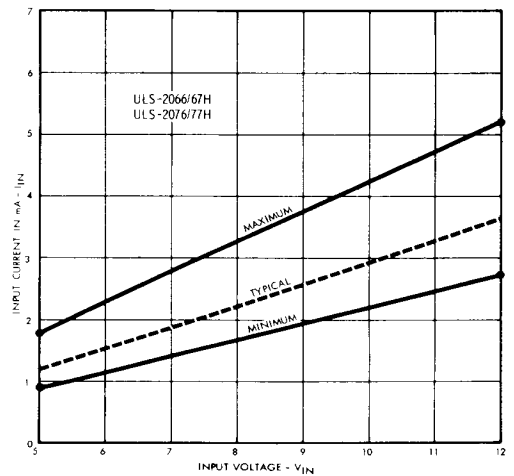




ALLOWABLE PEAK COLLECTOR CURRENT  
AS A FUNCTION OF DUTY CYCLE

AT  $T_A = +50^\circ\text{C}$

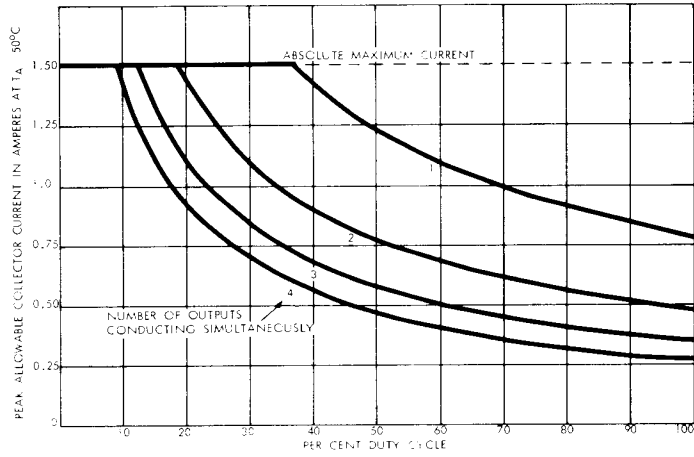

Dwg No. A-11.031

AT  $T_A = +75^\circ\text{C}$

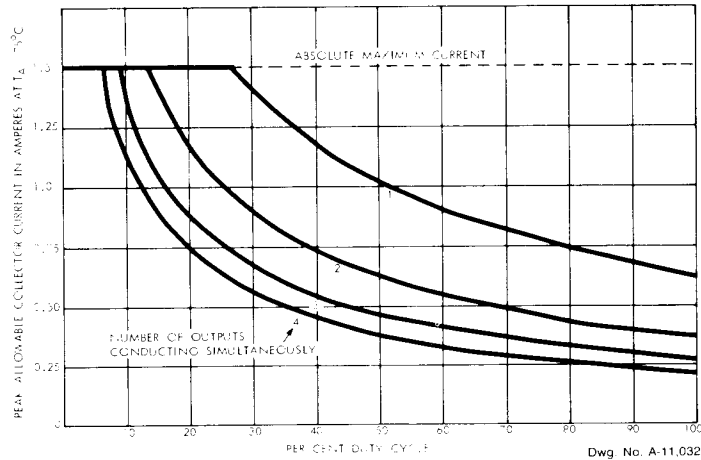

Dwg No. A-11.032

**ULS-2064H THROUGH ULS-2077H**  
**1.25 A QUAD DARLINGTON SWITCHES**

**ALLOWABLE PEAK COLLECTOR CURRENT**  
**AS A FUNCTION OF DUTY CYCLE**

**AT  $T_A = +100^\circ\text{C}$**

