





# CP610 - PLASTIC CAMLOCKS

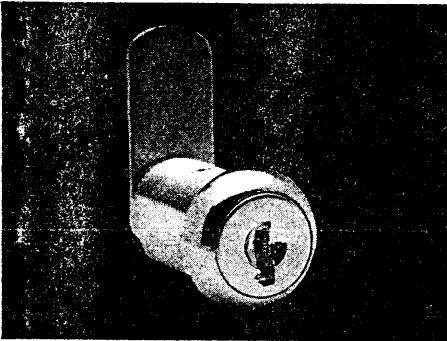

## CP610

Lock Number Dimensions in mm - Tolerances  $\pm 0.2\text{mm}$

|               | "A"  | "B"  | "C"  | "T" | "W"  | "X"  | "Y"  |
|---------------|------|------|------|-----|------|------|------|
| <b>CP610S</b> | 22.0 | 15.3 | 12.5 | 2.3 | 15.9 | 16.3 | 18.8 |
| <b>CP610M</b> | 22.0 | 21.5 | 17.9 | 2.3 | 15.9 | 16.3 | 18.8 |
| <b>CP610L</b> | 22.0 | 27.6 | 24.7 | 2.3 | 15.9 | 16.3 | 18.8 |

- Material: ABS plastic housing and cylinder.
- Mechanism: 5 Disc tumbler.
- Finish: Black standard - other colours or chromium plating by arrangement
- Key Codes: 100 - single bitted key - mastering available by arrangement
- Key Entries: Single or Double.
- Key Material: Brass (for locks keyed to differ (KD). Steel or Brass for locks keyed alike (KA).
- Rotation: 90° - left to right  
180° - left to right
- Fixing: By nut or speedclip.
- Cams: Secured by screw

See page 13 for standard cam selection.

