
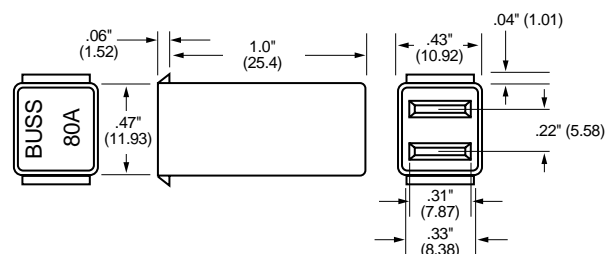


# Female MAXI™ Fuse

## Time Delay, 20-80 Amp

FMX

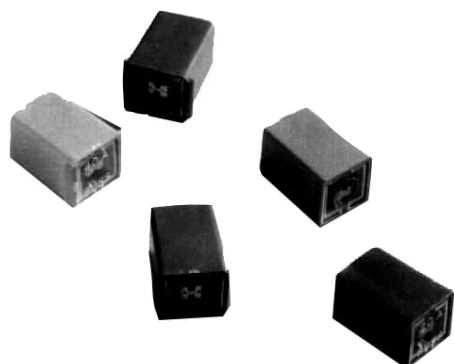

### Female FMX Maxi™ – Fuse

Time Delay

The FMX is available in ampere ratings from 20 - 80A in both a standard 27 mm height or a shorter 18 mm version for even lower space requirements. Both versions use 5.5 mm blade centers with a 6.0 mm width and .81 mm thick blades.

| Part No. | Amp Rating | Color    | Part No. | Amp Rating | Color  |
|----------|------------|----------|----------|------------|--------|
| FMX-20   | 20         | Lt. Blue | FMX-60   | 60         | Yellow |
| FMX-30   | 30         | Pink     | FMX-70   | 70         | Brown  |
| FMX-40   | 40         | Green    | FMX-80   | 80         | Black  |
| FMX-50   | 50         | Red      |          |            |        |

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.