


Maxi-Mox resistors are also versatile. Suitable for industrial applications requiring still more power for high voltage switching, industrial control, and high voltage current limiting.



Maxi-Mox

Precision Thick Film Axial Terminal High Voltage/High Resistance



FEATURES

- Wide resistance ranges
- Voltage rating to 50KV
- Power rating to 12.5 watts
- Silicone or epoxy coating

APPLICATIONS

- HV power supplies
- Power distribution
- Medical instrumentation
- Avionics

SPECIFICATIONS

Material

Core: Alumina

Resistor: Thick Film

Terminal: RoHS solder composition is 96% Sn, 3.5% Ag, 0.5% Cu

Electrical

Resistance Range:

250Ω to 1 Teraohm

Power Rating: 2.0W to 12.5W

Voltage Rating: 10KV to 50KV

Tolerance: 0.5% to 20%

Operating Temperature:

-55°C to +210°C

Temperature Coefficient:

25ppm/°C 0° to 85°C available

| Ohmite Series | Resistance Range (Ohms) | Power @70°C | Voltage Rating | Available Tolerances* | A max. (in/mm) | B max. (in/mm) | Capacitance (pf) |
|--|-------------------------|-------------|----------------|-----------------------|-----------------|----------------|------------------|
| • High-temperature (silicone coated) | | | | | | | |
| MOX-1-12 | 250 ohms to 300,000M | 2.5W | 10.0KV | 1% to 20% | 1.120" / 28.45 | 0.310" / 7.87 | 0.75 |
| MOX-2-12 | 500 ohms to 700,000M | 5.0W | 20.0KV | 1% to 20% | 2.120" / 53.85 | 0.310" / 7.87 | 0.60 |
| MOX-3-12 | 750 ohms to 1,000,000M | 7.5W | 30.0KV | 1% to 20% | 3.120" / 79.24 | 0.310" / 7.87 | 0.50 |
| MOX-4-12 | 1K to 1,000,000M | 10.0W | 40.0KV | 1% to 20% | 4.120" / 104.65 | 0.310" / 7.87 | 0.40 |
| MOX-5-12 | 1.25K to 1,000,000M | 12.5W | 50.0KV | 1% to 20% | 5.120" / 130.05 | 0.310" / 7.87 | 0.30 |
| *Some tolerances are not available over the entire resistance range. | | | | | | | |
| • Standard (epoxy coated) @25°C | | | | | | | |
| MOX-1-13 | 250 ohms to 300,000M | 2.0W | 10.0KV | 0.1% to 20% | 1.140" / 28.96 | 0.345" / 8.76 | 0.75 |
| MOX-2-13 | 500 ohms to 700,000M | 3.0W | 20.0KV | 0.1% to 20% | 2.140" / 54.36 | 0.345" / 8.76 | 0.60 |
| MOX-3-13 | 750 ohms to 1,000,000M | 4.0W | 30.0KV | 0.1% to 20% | 3.140" / 79.76 | 0.345" / 8.76 | 0.50 |
| MOX-4-13 | 1K to 1,000,000M | 5.0W | 40.0KV | 0.1% to 20% | 4.140" / 105.16 | 0.345" / 8.76 | 0.40 |
| MOX-5-13 | 1.25K to 1,000,000M | 6.0W | 50.0KV | 0.1% to 20% | 5.140" / 130.56 | 0.345" / 8.76 | 0.30 |

TEMPERATURE/VOLTAGE COEFFICIENTS OF RESISTANCE

| Resistor Series | Temp. Coeff. of Resistance* | | | Voltage Coeff. of Resistance** | |
|-----------------|-----------------------------|-------------|-----------------|--------------------------------|-----------------|
| | 25 PPM/°C | 50 PPM/°C | 100 PPM/°C | < 2PPM/Volt | < 5PPM/Volt |
| MOX-1 | 1K-99M | 100M-450M | 451M-30,000M | 250Ω-1,000M | 1,001M-100,000M |
| MOX-2 | 1K-199M | 200M-1,000M | 1,001M-60,000M | 500Ω-2,600M | 2,601M-200,000M |
| MOX-3 | 1K-299M | 300M-1,500M | 1,501M-90,000M | 750Ω-4,000M | 4,001M-300,000M |
| MOX-4 | 1K-399M | 400M-2,000M | 2,001M-120,000M | 1K-5,300M | 5,301M-400,000M |
| MOX-5 | 1K-499M | 500M-2,500M | 2,501M-150,000M | 1.25K-6,700M | 6,701M-500,000M |


*Epoxy: -55°C to 110°C; High Temp. Silicone: -55°C to 210°C

**For tighter VCs please contact Ohmite.

PERFORMANCE DATA

| Characteristic | Test Method | Specification |
|---------------------------------|--|---|
| Humidity | MIL-STD-202, Method 103B, Condition B | ±0.25% |
| Dielectric Withstanding Voltage | MIL-STD-202, Method 301, 750V | ±0.25% |
| Insulation Resistance | MIL-STD-202, Method 302, Condition A or B | >10,000 M or greater dry |
| Thermal Shock | MIL-STD-202, Method 107G, Condition B, B-1, or F | ±0.20% |
| Load Life | MIL-STD-202, Method 108A, Condition D | ±1.0% |
| Resistance to Solvents | MIL-STD-202, Method 215G | Acceptable for High Reliability Series only |
| Terminal Strength | MIL-STD-202, Method 211A, Condition A or B | ±0.25% |
| Shock (Specified Pulse) | MIL-STD-202, Method 213B, Condition I | ±0.25% |
| Vibration High Frequency | MIL-STD-202, Method 204D, Condition D | ±0.20% |
| Power Conditioning | MIL-R-49462A, Par 4.8 | ±0.50% |
| Solderability | MIL-STD-202, Method 208F | >95% Coverage |

DERATING

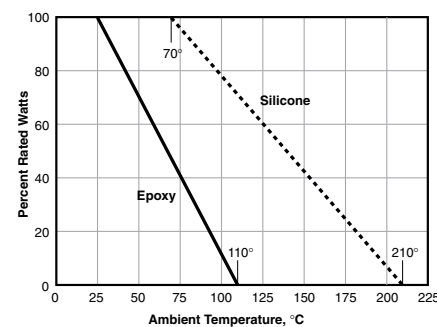

ORDERING INFORMATION

Coating
 2 = Black silicone
 3 = Epoxy
 6 = No coating
 E = RoHS Compliant

Style
 1, 2, 3, 4, 5, 8

MOX-1-131006FE

Maxi Mox Series
 Terminal
 1 = 0.032"

Ohms
 First 3 digits are significant; 4th digit is multiplier (# of zeroes to follow). Examples:
 1000 = 1000Ω
 1503 = 150,000Ω
 5005 = 50,000,000Ω

Tolerance
 D = 0.5%
 F = 1%
 G = 2%
 J = 5%
 K = 10%
 M = 15%
 P = 20%

Check product availability at www.ohmite.com