

**SURFACE MOUNT**  
**GLASS HIGH EFFICIENCY RECTIFIERS**


REVERSE VOLTAGE - 50 to 1000 Volt  
 FORWARD CURRENT - 3.0 Amperes

### FEATURES

- Low cost
- Diffused junction
- Ultra fast switching for high efficiency
- Low reverse leakage current
- Low forward voltage drop
- High current capability
- The plastic material carries UL recognition 94V-0

### MECHANICAL DATA

- Case: Molded Plastic
- Polarity: Color band denotes cathode
- Weight: 0.003 ounces, 0.093 grams
- Mounting position: Any

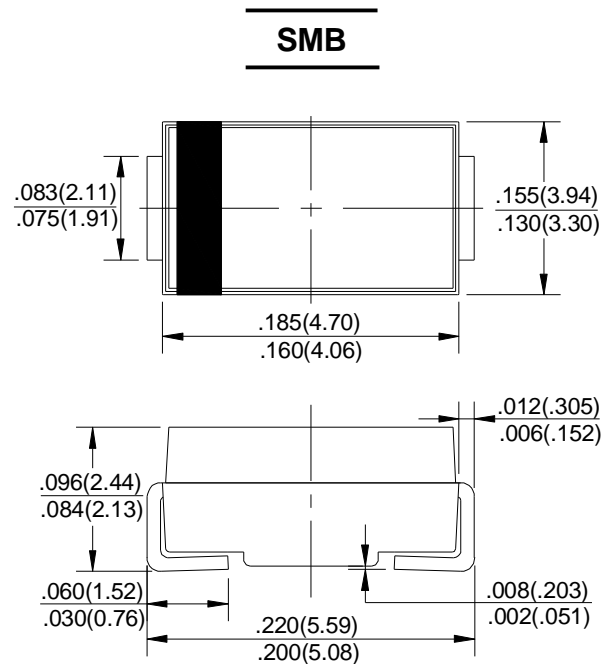

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	HS3AB	HS3BB	HS3DB	HS3GB	HS3JB	HS3KB	HS3MB	UNIT	
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V	
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V	
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V	
Maximum Average Forward Rectified Current @T <sub>A</sub> =55 °C	I <sub>(AV)</sub>	3.0							A	
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	I <sub>FSM</sub>	150							A	
Peak Forward Voltage at 3.0A DC(Note1)	V <sub>F</sub>	1.0			1.3	1.7			V	
Maximum DC Reverse Current @T <sub>J</sub> =25°C at Rated DC Blocking Voltage @T <sub>J</sub> =100°C	I <sub>R</sub>	5.0				100				uA
Maximum Reverse Recovery Time(Note 1)	T <sub>RR</sub>	50				75				nS
Typical Junction Capacitance (Note2)	C <sub>J</sub>	50				30				pF
Typical Thermal Resistance (Note3)	R <sub>θJA</sub>	20							°C/W	
Operating Temperature Range	T <sub>J</sub>	-50 to +150							°C	
Storage Temperature Range	T <sub>STG</sub>	-50 to +150							°C	

NOTES: 1.Measured with I<sub>F</sub>=0.5A, I<sub>R</sub>=1A , I<sub>RR</sub>=0.25A

2.Measured at 1.0 MHz and applied reverse voltage of 4.0V DC

3.Thermal resistance junction to ambient

FIG. 1 – FORWARD CURRENT DERATING CURVE

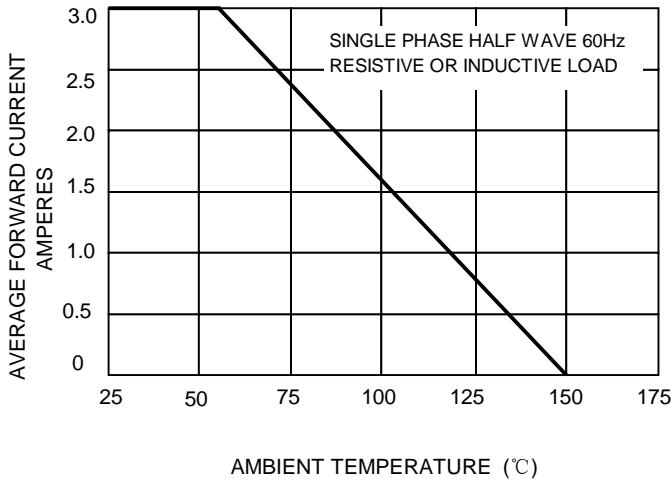


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

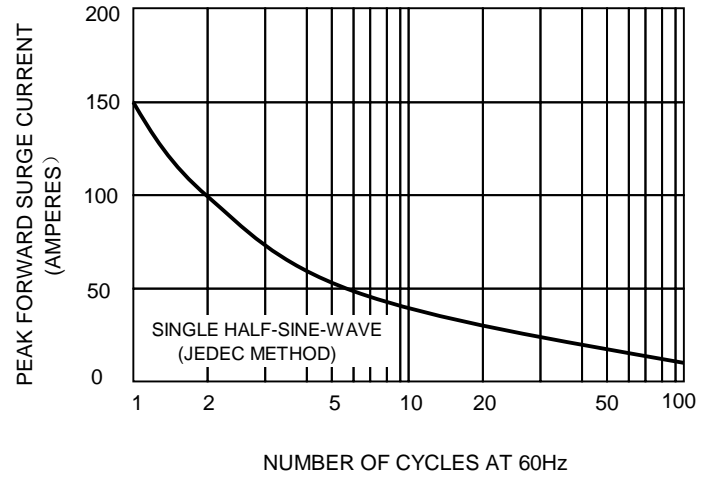


FIG.3 – TYPICAL JUNCTION CAPACITANCE

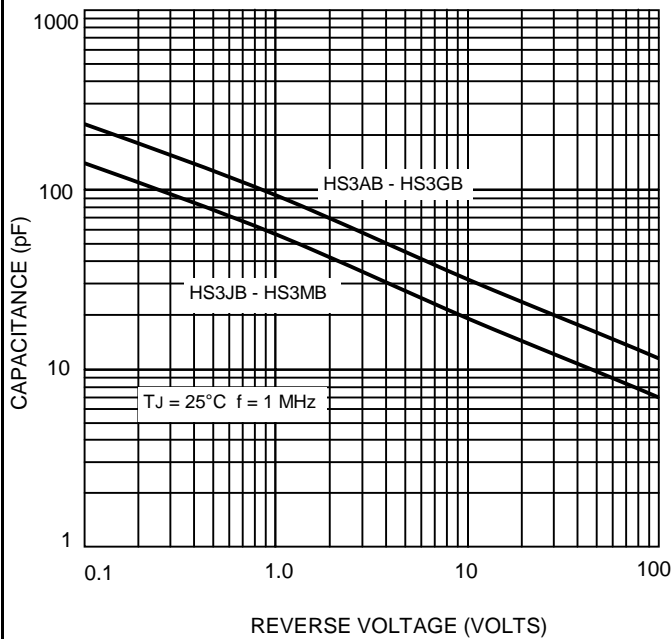


FIG.4-TYPICAL FORWARD CHARACTERISTICS

