



### 1. Dimensions:

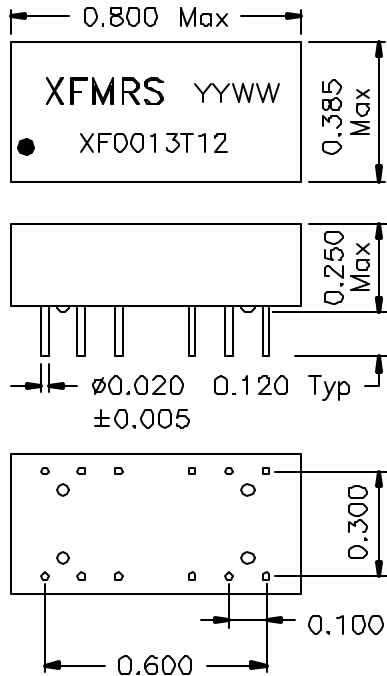

### 2. Schematic:

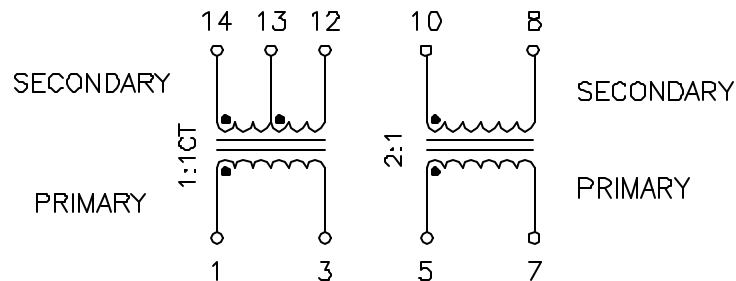

### 3. Electrical Specifications: @25°C

Isolation Voltage: 1500 Vrms

Turns Ratio: (1-3):(14-12)=1:1CT ±5%

Turns Ratio: (5-7):(10-8)=2:1 ±5%

PRI OCL: 0.8mH Min @100KHz 50mV

Cw/w: 30pF Max @100KHz 50mV (PRI/SEC)

PRI LL: 0.6uH Max @100KHz 50mV SEC SHORTED

PRI DC Resistance: 0.50 Ohms Max

PIN10-8 DC Resistance: 0.20 Ohms Max

PIN14-12 DC Resistance: 0.50 Ohms Max

#### Notes

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

DOC. REV. A/1

<b>XFMRS Inc</b>	Title: TRANSFORMER		
	UNLESS OTHERWISE SPECIFIED	P/N: XF0013T12	REV. A
	TOLERANCES: .xxx ±0.010	DWN. 廖玉坤	May-06-00
	Dimensions in Inch	CHK. 李清儿	May-06-00
SHEET 1 OF 1	APP. BW	May-06-00	