



### 1. Dimensions:

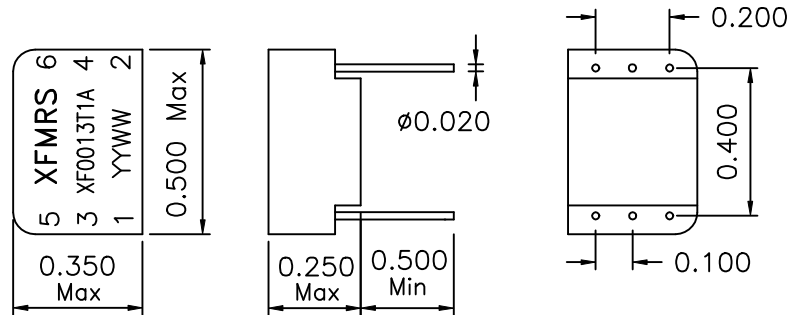

### 2. Schematic:



### 3. Electrical Specifications: @25°C

Isolation Voltage: 1500Vrms

Turns Ratio: 1CS:1 ±5% (PRI:SEC) tie P2-3

PRI OCL: 0.8mH Min @100KHz 50mV tie P2-3

PRI LL: 0.60uH Max @100KHz, 50mV (tie P2-3) SEC shorted

Cw/w: 30pF Max @100KHz 50mV (PRE/SEC)

PRI DCR: 0.80 Ohms Max tie P2-3

SEC DCR: 0.60 Ohms Max

**Notes:**

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible

DOC. REV. A/1

<b>XFMRs Inc</b>	Title: T1/CEPT/ISDN-PRI TRANSFORMERS		
	UNLESS OTHERWISE SPECIFIED		P/N: XF0013T1A
	TOLERANCES:		REV. A
	.xxx ±0.010		DWN. 廖玉坤 May-06-00
Dimensions in Inch	CHK. 李清儿	May-06-00	
SCALE 2:1 SHT 1 OF 1	APP. BW	May-06-00	