


PCB DIN Receptacle

161-0503

KOBICONN

PCB DIN Receptacles

Dimensions: In.

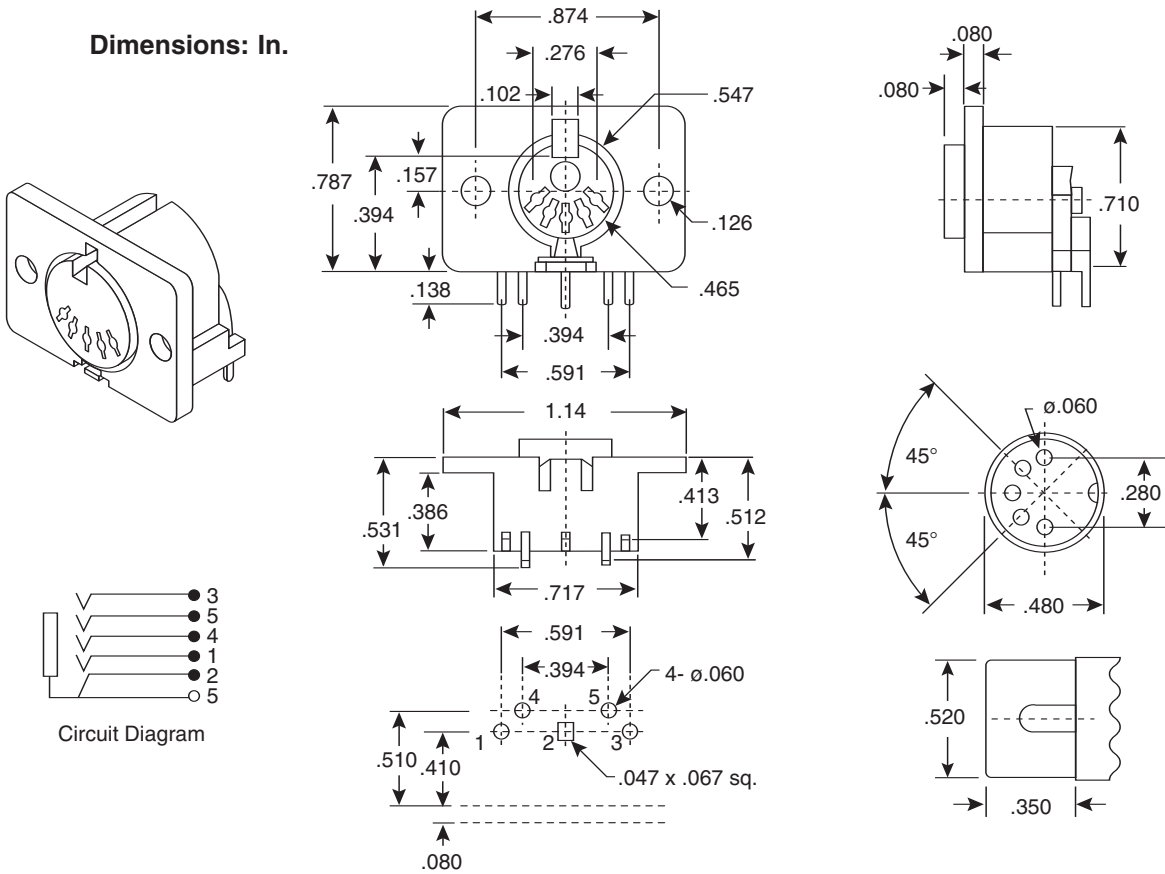

SPECIFICATIONS

Type:	5P DIN Jack
Mounting:	PCB Right Angle
Contact Resistance:	30mΩ max. @ 0.1A DC (pin~contact), 50mΩ max. (plug shield~socket)
Insertion / Extraction Force:	0.5~7.0Kg
Soldering Heat:	250±5°C
Operating Temperature:	-25°C ~ +85°C
Insulation Resistance:	100MΩ@ 500VDC
Dielectric Strength:	500VAC for 1 Minute (Between Terminals)
Power Rating:	1A/12VDC
Life Expectancy:	5,000 Cycles
Contacts:	Tin/Lead Plated Brass
Earth Terminal:	Tin/Lead Plated Phosphor Bronze
Insulator (Body):	ABS HB

Date Last Revised: 5-12-05

Available from Mouser Electronics
1-800-346-6873
www.mouser.com

KC-300698

161-0503