

FL400 THRU FL408

IN-LINE MINIATURE SINGLE PHASE SILICON BRIDGE VOLTAGE - 50 to 800 Volts CURRENT - 4.0 Amperes

 Recognized File #E111753

FEATURES


- Surge overload rating: 200 Amperes peak
- Ideal for printed circuit board
- Plastic package has Underwriter Laboratory Flammability Classification 94V-O
- Reliable low cost construction utilizing molded plastic technique

MECHANICAL DATA

Terminals: Lead solderable per MIL-STD-202,
Method 208

Mounting position: Any

Weight: 0.2 ounce, 5.6 grams

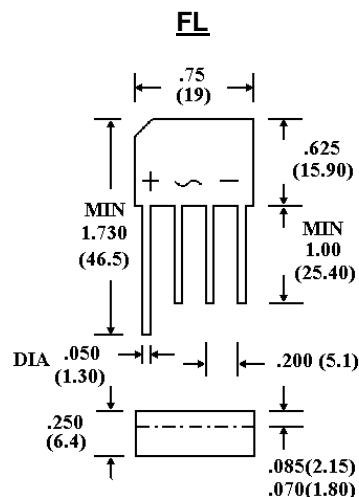

Dimensions in inches and (millimeters)

	FL400	FL401	FL402	FL404	FL406	FL408	UNITS
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	V
Maximum RMS Bridge Input Voltage	35	70	140	280	420	560	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	V
Maximum Average Rectified Output Current at 50 °C Ambient	4.0						A
Peak One Cycle Surge Overload Current	200						A
Maximum Forward Voltage Drop per Bridge Element at 4.0A DC	1.1						V
Max (Total Bridge) Reverse Leakage at Rated DC Blocking Voltage	10.0						µg A
Max (Total Bridge) Reverse Leakage at Rated DC Blocking Voltage and 100 °C	1.0						mA
I ² t Rating for fusing (t < 8.3ms)	93.0						A ² Sec
Typical Thermal Resistance per leg (Note 2) R _{θJKJA} (Note 3) R _{θKJL}	19.0 2.4						°C/W
Operating Temperature Range	-55 TO +125						°C
Storage Temperature Range	-55 TO +150						°C

NOTES:

1. Thermal resistance from junction to ambient with units mounted on 3.0" x 3.0" x 0.11" thick (7.5" x 7.5" x 0.3cm) AL Plate.
2. Thermal resistance from junction to lead with units mounted on P.C.B at 0.375" (9.5mm) lead length and 0.5" x 0.5" (12" x 12mm) copper pads.

RATING AND CHARACTERISTIC CURVES

FL400 THRU FL408

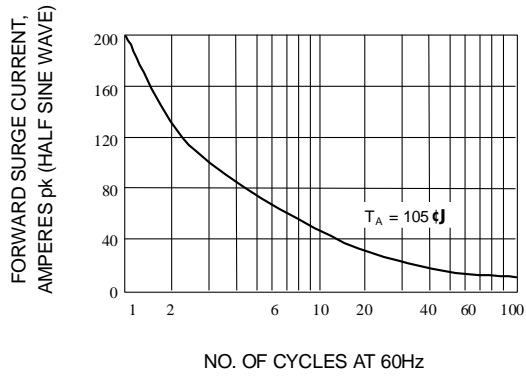


Fig. 1- MAXIMUM OVERLOAD SURGE CURRENT

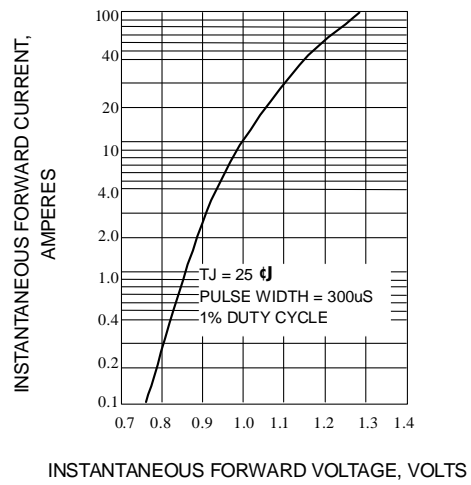


Fig. 2-TYPICAL FORWARD CHARACTERISTICS(25 °C)

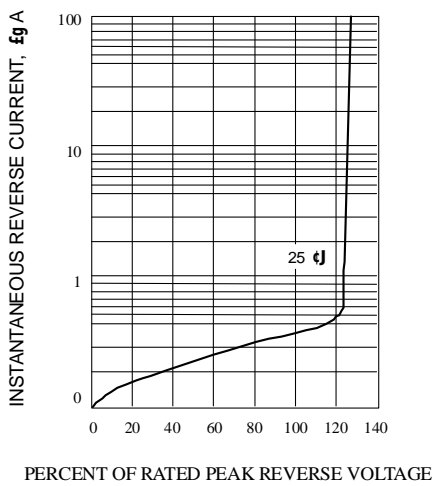


Fig. 3- REVERSE CHARACTERISTICS

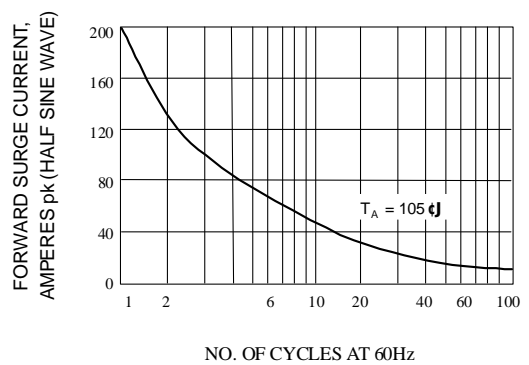


Fig. 4-NON-RECURRENT SURGE RATING