




CONNOR-WINFIELD CORPORATION

AURORA, IL. 60505
 PHONE (630) 851-4722
 FAX (630) 851-5040

T3 APPLICATION TTL CLOCKS

SPECIFICATIONS	S55T3	S65T3	
Frequency Range	1.625MHz to 70MHz		
Freq Calibration @25°C	±4ppm		
Frequency Stability	±10ppm		
Temperature Range	0°C to +70°C	-40°C to +85°C	
Freq vs Supply Voltage	±1ppm		
Aging	±5ppm		
Overall Freq Stability	±20ppm (Sum of all frequency stabilities & aging tolerances for the life of the oscillator)		
Output	Waveform	TTL Squarewave	
	Load	10 TTL	
	Voltage	Voh	2.4V Minimum
		Vol	0.5V Maximum
	Current	Ioh	-16mA
		Iol	16mA
	Duty Cycle	45/55 Maximum measured at 1.4V	
Rise/Fall Time	6nS Maximum		
Start Up Time	10mS Maximum		
Supply Voltage	+5Vdc ±5%		
Supply Current	25mA Maximum		
Package	All metal, hermetically sealed, welded package		

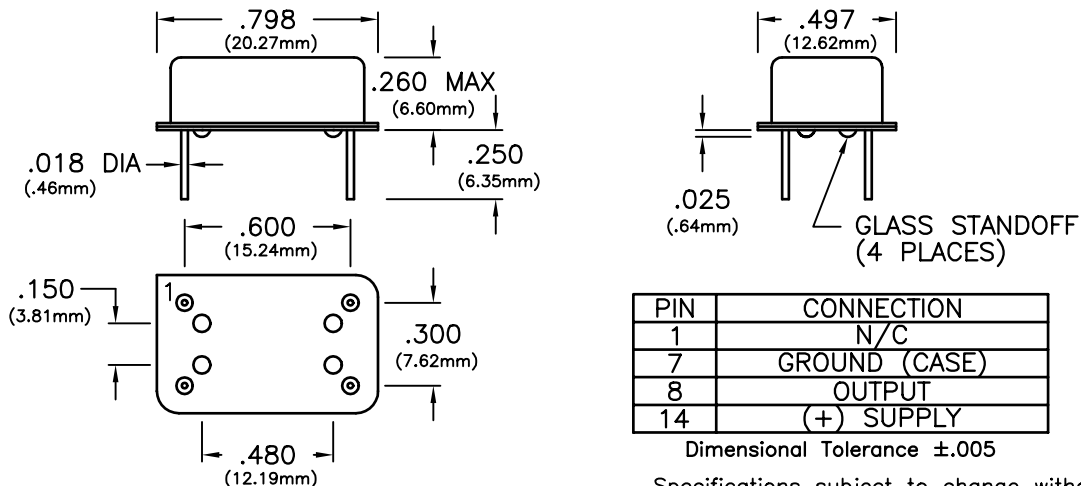

PIN	CONNECTION
1	N/C
7	GROUND (CASE)
8	OUTPUT
14	(+) SUPPLY

Dimensional Tolerance ±.005

Specifications subject to change without notice

BULLETIN #: TT010
 PAGE 1 OF 1

REV: 03
 DATE: 5/15/95

ISSUED BY: _____