

## Silicon NPN Power Transistors

2SC4369

## DESCRIPTION


- With TO-220F package
- Complement to type 2SA1658
- Good linearity of  $h_{FE}$

## APPLICATIONS

- For general purpose applications

## PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

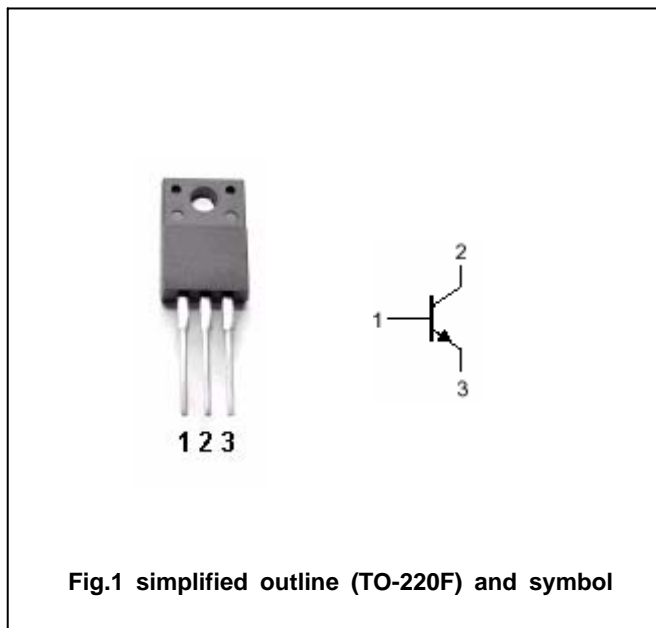Absolute maximum ratings ( $T_a=25^\circ\text{C}$ )

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$V_{CBO}$	Collector-base voltage	Open emitter	30	V
$V_{CEO}$	Collector-emitter voltage	Open base	30	V
$V_{EBO}$	Emitter-base voltage	Open collector	5	V
$I_C$	Collector current		3	A
$I_B$	Base current		0.3	A
$P_C$	Collector dissipation	$T_C=25$	15	W
$T_j$	Junction temperature		150	
$T_{stg}$	Storage temperature		-55~150	

## Silicon NPN Power Transistors

## 2SC4369

## CHARACTERISTICS

T<sub>j</sub>=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>(BR)CEO</sub>	Collector-emitter breakdown voltage	I <sub>C</sub> =10mA ; I <sub>B</sub> =0	30			V
V <sub>CEsat</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =2A ; I <sub>B</sub> =0.2A			0.8	V
V <sub>BE</sub>	Base-emitter on voltage	I <sub>C</sub> =0.5A ; V <sub>CE</sub> =2V			1.0	V
I <sub>CBO</sub>	Collector cut-off current	V <sub>CB</sub> =20V ; I <sub>E</sub> =0			1.0	μA
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =5V ; I <sub>C</sub> =0			1.0	μA
h <sub>FE-1</sub>	DC current gain	I <sub>C</sub> =0.5A ; V <sub>CE</sub> =2V	70		240	
h <sub>FE-2</sub>	DC current gain	I <sub>C</sub> =2.5A ; V <sub>CE</sub> =2V	25			
f <sub>T</sub>	Transition frequency	I <sub>C</sub> =0.5A ; V <sub>CE</sub> =2V		100		MHz

◆ h<sub>FE-1</sub> Classifications

O	Y
70-140	120-240

Silicon NPN Power Transistors

2SC4369

PACKAGE OUTLINE

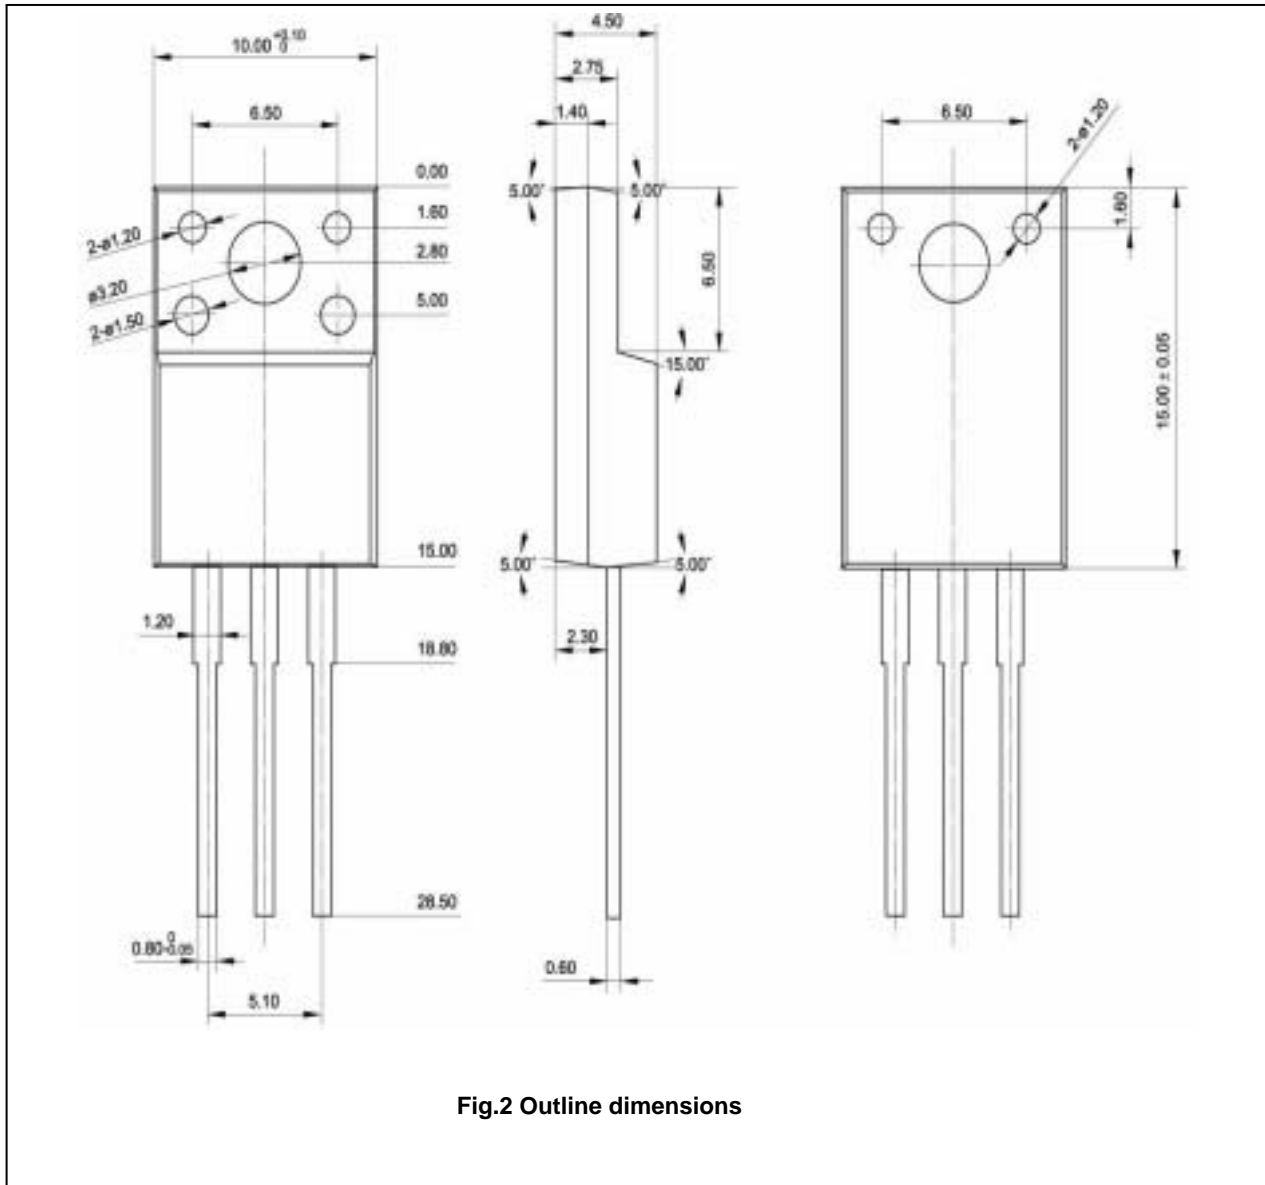


Fig.2 Outline dimensions