



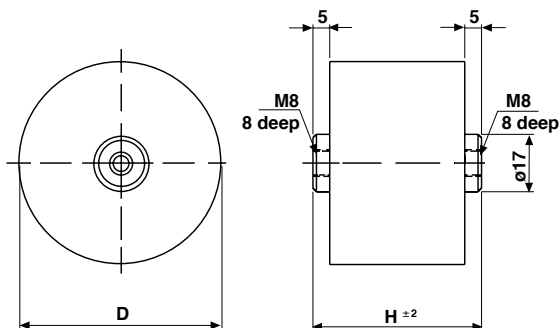
Metallized Film Power Capacitor



FEATURES

- Lowest stray inductance
- Extremely low losses also at high frequencies
- Low ESR: $< 4\text{m}\Omega$
- Highest RMS current rating: up to 100A
- High impulse discharge current capability
- Heavy duty shock and vibration
- High reliability and life expectancy
- Easy mounting

GENERAL SPECIFICATIONS	
Dielectric	Polypropylene
Temperature coefficient (TCC)	- 2.3% from - 20°C to + 70°C
Dissipation factor (DF)	$< 4 \times 10^{-4}/2\text{kHz}$
Capacitance tolerance	$\pm 5\%$
Operating temperature	- 40°C to + 70°C at U_R - 40°C to + 100°C at $0.5 \cdot U_R$
Inductance	$< 10\text{nH}$
Lifetime expectancy	100,000 hours at U_R and 60°C
Reliability	300FIT
Test voltage	Terminal/Terminal = $1.5 \cdot U_{RDC}$, 10s Terminal/Earth = 6000VAC, 60s
Casing material	Polypropylene
Filling	Resin Polyurethane, UL 94, V-0
Standards	IEC 61071-1, EN 61071 and IEC 61881

DIMENSIONS

TYPE DESCRIPTION							
TYPE GLI	RATED VOLTAGE		CAPACITANCE (μ F)	CURRENT MAX. (A)	du/dt MAX. (V/ μ s)	D (mm)	H (mm)
	DC (V)	AC (V)					
700-35 A	700	200	35	80	450	87	44
700-160 A	700	200	160	100	150	87	62
700-230 A	700	200	230	100	100	87	74
900-25 A	900	250	25	60	500	87	44
900-100 A	900	250	100	80	150	87	62
900-150 A	900	250	150	90	125	87	74
1100-15 A	1100	300	15	50	750	87	44
1100-75 A	1100	300	75	80	200	87	62
1100-100 A	1100	300	100	80	150	87	74
1250-50 A	1250	350	50	70	250	87	62
1250-75 A	1250	350	75	70	150	87	74
1450-40 A	1450	400	40	70	250	87	62
1450-60 A	1450	400	60	70	200	87	74
1800-25 A	1800	450	25	50	300	87	62
1800-35 A	1800	450	35	50	250	87	74
2150-18 A	2150	500	18	40	400	87	62
2150-25 A	2150	500	25	40	300	87	74