

10BASE-T LAN MAGNETICS

Dual Transformer Modules


LM00503

- Dual designs for two-port configurations maximize space and cost efficiencies
- S556-5999-30 includes inductors for use with additional differential filtering
- Low profile, surface mount packaging rated to 225° C peak IR reflow temperature
- Operating temperature 0° to 70° C
- Minimum interwinding breakdown voltage of 1500 Vrms

ELECTRICAL SPECIFICATIONS AT 25° C

Part Number	Turns Ratio ±2%		Insertion Loss dB max	Return Loss dB min	Common to Common Mode Rejection dB min		Crosstalk dB min
	TX	RX	1MHz to 10MHz	5MHz to 10MHz	10MHz to 30MHz	30MHz to 100MHz	1MHz to 10MHz
S553-3873-17	1 : 2	1 : 1	-0.8	-20	---	---	-40
S553-5841-14	1CT : 1.41	1 : 1	-1.0	-15	-40	-30	-35
S556-5841-09	1CT : 1	1CT : 1	-1.0	-20	-40	-30	-40
S556-5999-30	1 : 2	1 : 1	-0.5	-20	---	---	-40

SCHEMATICS

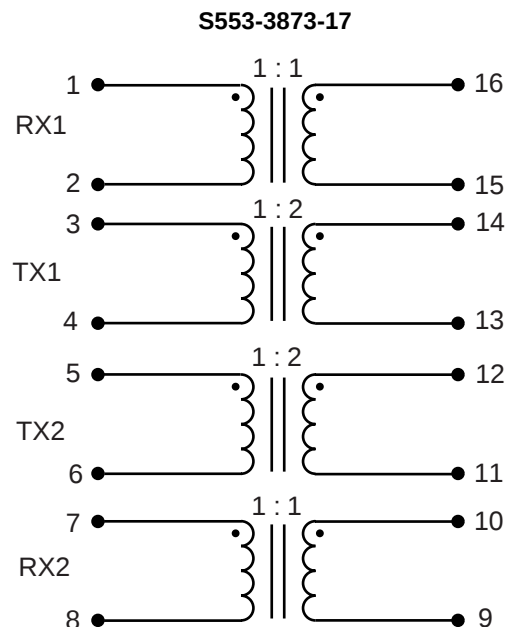


©2001 Bel Fuse Inc. Specifications subject to change without notice. 09.01


10BASE-T LAN MAGNETICS Dual Transformer Modules

SCHEMATICS

S553-5841-14

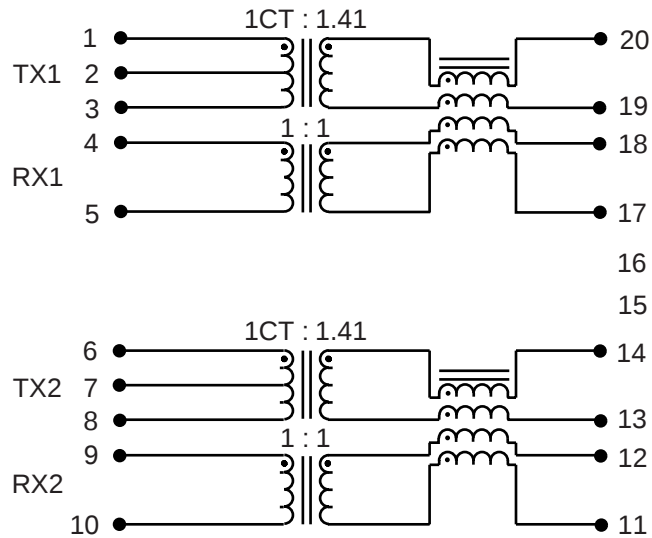

S556-5841-09

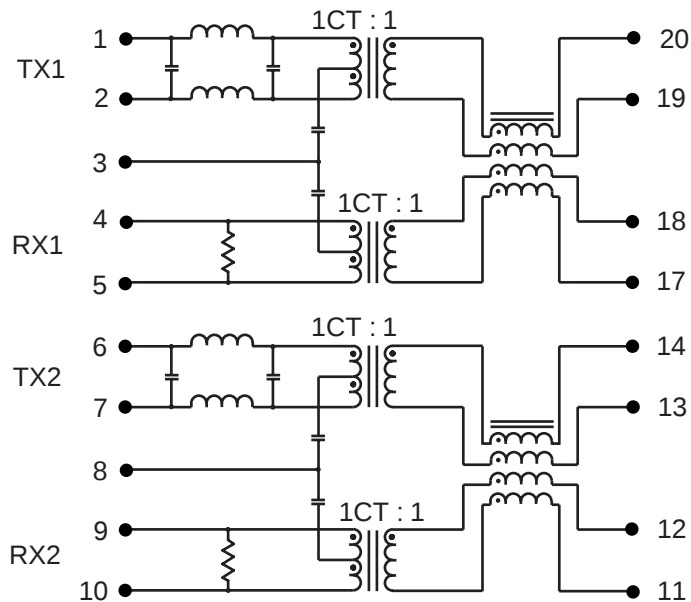


10BASE-T LAN MAGNETICS

Dual Transformer Modules

LM00503


SCHEMATICS

S556-5999-30

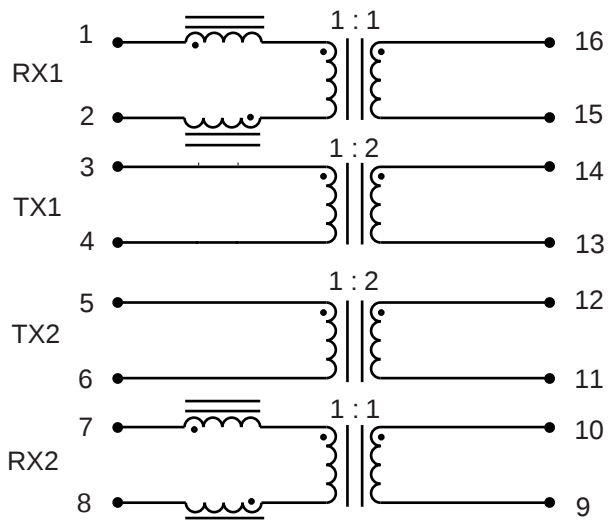


MECHANICALS

S553-3873-17
S556-5999-30

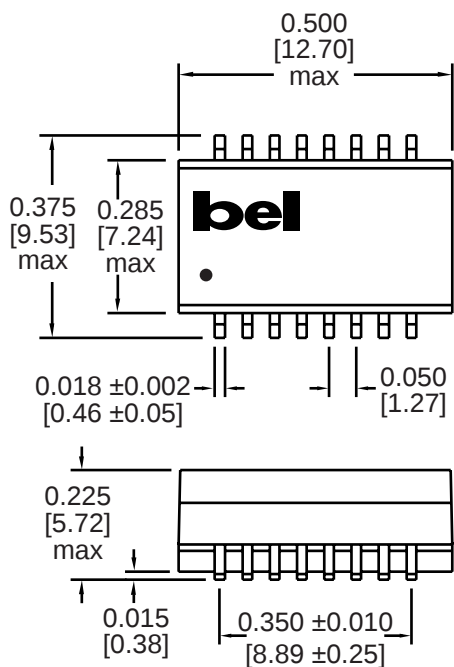

Suggested PCB Pad Layout

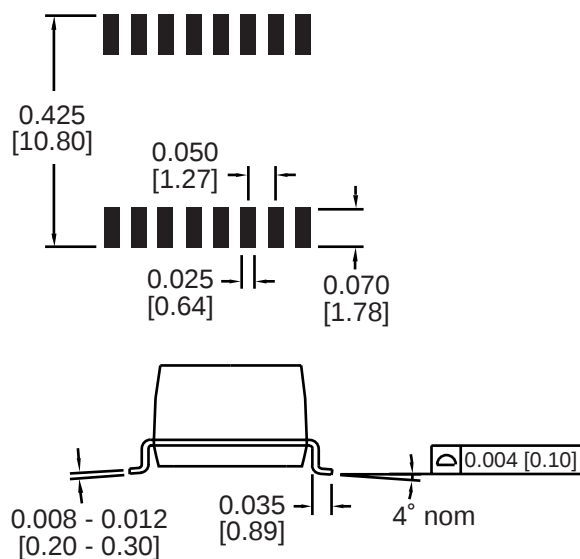

Dimensions are in inches [millimeters].


Standard dimension tolerance is ± 0.005 [0.13] unless otherwise noted.

©2001 Bel Fuse Inc. Specifications subject to change without notice. 09.01

10BASE-T LAN MAGNETICS Dual Transformer Modules

MECHANICALS

S553-5841-14
S556-5841-09

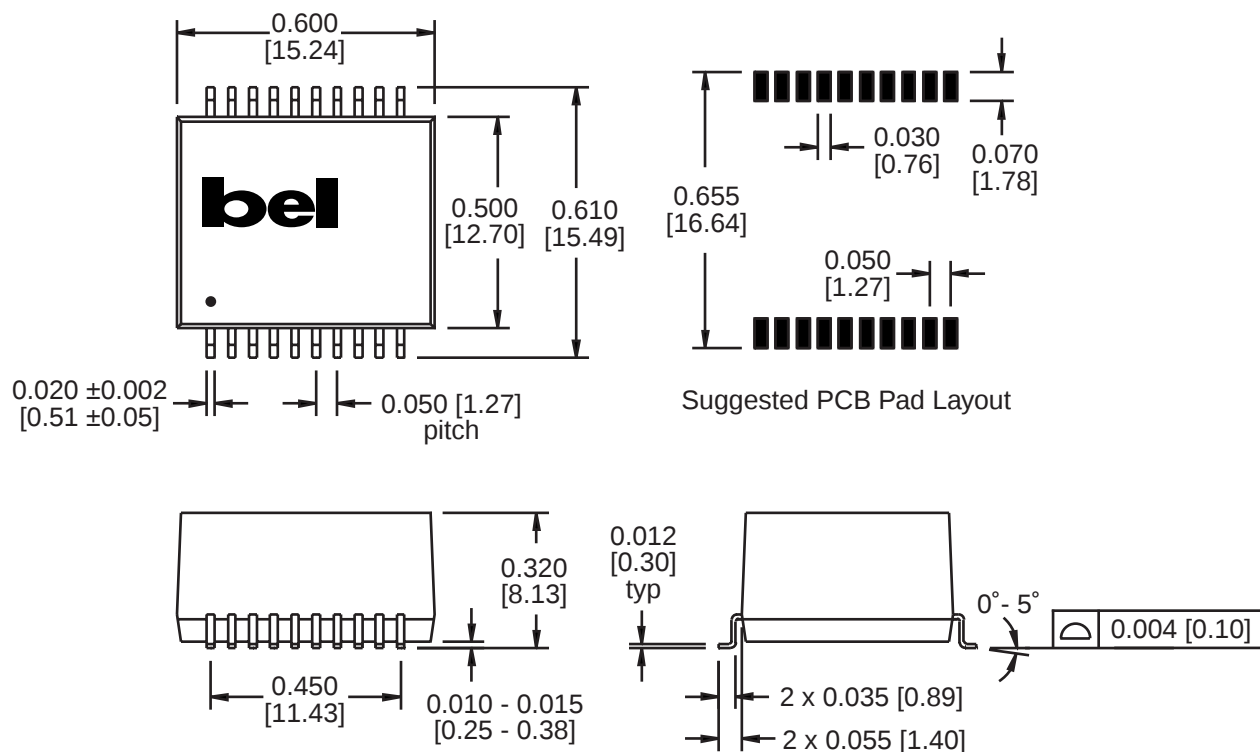

Dimensions are in inches [millimeters].
Standard dimension tolerance is ± 0.010 [0.25] unless otherwise noted.

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

L5-14

FAR EAST

Bel Fuse Ltd.
8F / 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com