

Coaxial Amplifier

ZFL-500

50Ω Low Power 0.05 to 500 MHz

Features

- wideband, 0.05 to 500 MHz
- rugged, shielded case
- low noise, 5.3 dB typ.
- protected by US Patent, 6,943,629

Applications

- instrumentation
- lab use
- VHF/UHF



SMA version shown
CASE STYLE: Y460

Connectors	Model	Price	Qty.
SMA	ZFL-500	\$69.95	(1-9)
BNC	ZFL-500-BNC	\$74.95	(1-9)
BRACKET (OPTION "B")		\$2.50	(1+)

Amplifier Electrical Specifications


MODEL NO.	FREQUENCY (MHz)		GAIN (dB)		MAXIMUM POWER (dBm)		DYNAMIC RANGE		VSWR (:1) Typ.		DC POWER	
	f_L	f_U	Min.	Flatness Max.	Output (1 dB Compr.)	Input (no damage)	NF (dB) Typ.	IP3 (dBm) Typ.	In	Out	Volt (V) Nom.	Current (mA) Max.
ZFL-500	0.05	500	20	±1.0	+9	+5	5.3	+18	1.9	1.9	15	80

Open load is not recommended, potentially can cause damage.
With no load derate max input power by 20 dB

Maximum Ratings

Operating Temperature	-20°C to 71°C
Storage Temperature	-55°C to 100°C
DC Voltage	+17V Max.

Outline Drawing

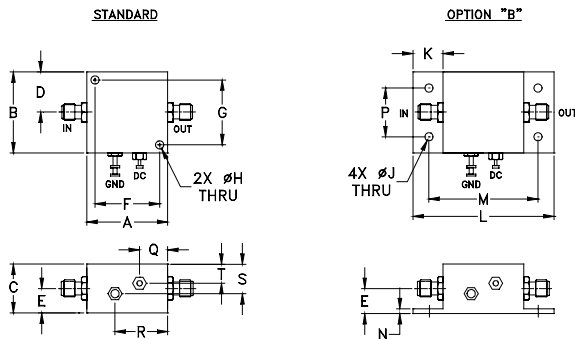

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
1.25	1.25	.75	.63	.36	1.000	1.000	.125	.125	.46	2.18	1.688	.06	.750	.50	.80	.45	.29	grams
31.75	31.75	19.05	16.00	9.14	25.40	25.40	3.18	3.18	11.68	55.37	42.88	1.52	19.05	12.70	20.32	11.43	7.37	38



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

FREQUENCY (MHz)	GAIN (dB)			DIRECTIVITY (dB)			VSWR (:1) 15V		NOISE FIGURE (dB)	POUT at 1 dB COMPR. (dBm)
	12V	15V	16V	12V	15V	16V	IN	OUT		
0.05	20.18	21.24	21.41	18.10	17.50	17.40	1.59	1.69	—	10.52
0.33	21.00	22.06	22.23	16.40	15.70	15.60	1.17	1.11	—	10.82
3.90	21.03	22.08	22.27	16.30	15.60	15.50	1.09	1.11	—	10.84
47.90	21.08	22.13	22.30	16.10	15.40	15.30	1.07	1.11	5.72	10.87
192.30	20.96	21.93	22.07	15.40	15.90	17.10	1.01	1.01	5.74	10.31
243.60	20.79	21.74	21.90	16.80	17.20	16.80	1.01	1.01	5.76	10.28
307.70	20.74	21.70	21.84	16.20	16.60	16.60	1.01	1.02	5.77	10.26
371.80	20.58	21.55	21.70	16.40	17.20	17.60	1.01	1.02	5.77	10.23
435.90	20.69	21.65	21.80	15.70	16.80	16.10	1.01	1.03	5.78	10.14
500.00	20.40	21.36	21.52	17.10	17.70	16.70	1.01	1.02	5.79	10.05

