

TOSHIBA SOLID STATE AC RELAY

TSZ1J2A45-N

OPTICALLY ISOLATED, NORMALLY OPEN DUAL IN ONE PACKAGE TYPE SSR

Unit in mm

COMPUTER PERIPHERALS

MACHINE TOOL CONTROLS


PROCESS CONTROL SYSTEMS

TRAFFIC CONTROL SYSTEMS

- R.M.S On-State Current : $I_T(\text{RMS})=1\text{A}$
- Non-Repetitive Peak Off-State Voltage : $V_{\text{DSM}}=600\text{V}$
- TTL Compatible
- Isolation Voltage : 2000V AC ($t=1\text{min.}$)

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$, EACH CIRCUIT)
INPUT (CONTROL)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Control Input Current (DC) (Note 1)	$I_F(\text{IN})$	30	mA
Input Reverse Voltage (DC)	$I_R(\text{IN})$	5	V

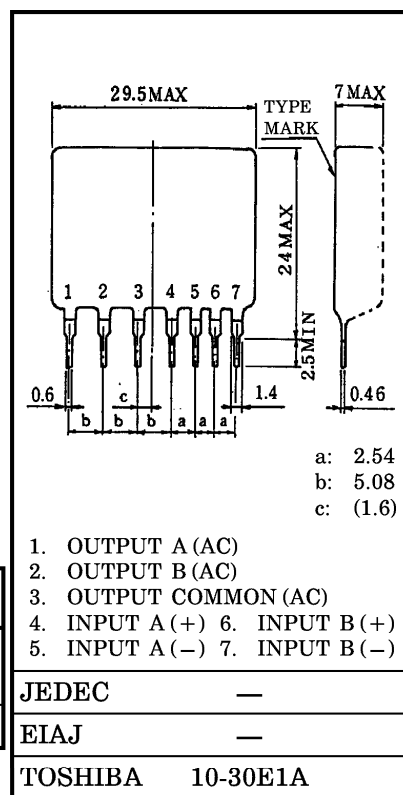

OUTPUT (LOAD)

Non-Repetitive Peak Off-State Voltage	V_{DSM}	600	V
Nominal AC Line Voltage	V_{AC}	240	V
R.M.S On-State Current	$I_T(\text{RMS})$	1	A
Peak One Cycle Surge On-State Current (Non-Repetitive)	I_{TSM}	40 (50Hz) 44 (60Hz)	A
Operating Frequency Range	f	45~65	Hz
Isolation Voltage ($t=1\text{min.}$, Input to Output)	BV_S/AC	2000	V
Operating Temperature Range	T_{opr}	-20~80	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-30~100	$^\circ\text{C}$

Note 1 : Not Including Input Resistance : Used Insert an external resistance into SSR.
Reverse voltage should not be applied to input.

2 : Sunbber network (C-R) is necessary to protect from surge voltage and dv/dt fire.
Sunbber network is to be connected between #1, #2, and #3 terminal.

3 : Mounting : Soldering of printed wiring board should be used under 260°C and 10 second.

961001EAA2

● TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

ELECTRICAL CHARACTERISTICS (Ta = 25°C, EACH CIRCUIT)
INPUT (CONTROL)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Pick Up Current	I_{FT}	$V_{AC}=100V_{rms}$, Resistive Load	—	—	12	mA
Drop Out Voltage	V_{FD}		0.5	—	—	V
Input Resistance	$R_{(IN)}$	—	—	0	—	Ω

OUTPUT (LOAD)

Off-State Leakage Current	I_{OL}	$V_{AC}=200V_{rms}$, $f=50Hz$	—	—	1.0	mA
Peak On-State Voltage	V_{TM}	$I_T(RMS) = 1A$	—	—	1.5	V
dv/dt (Off-State)	dv/dt	$V_{DSM}=0.7 \times \text{Rated}$	50	—	—	V / μs
Turn-On Time	t_{on}	$V_{AC}=100V_{rms}$, Resistive Load (Fig. 1)	—	—	1	ms
Turn-Off Time	t_{off}		—	—	1 / 2	Cycle
Isolation Resistance	R_s	$V=500V$, $R_H=40\sim60\%$	10^{10}	10^{11}	—	Ω

EQUIVALENT CIRCUIT


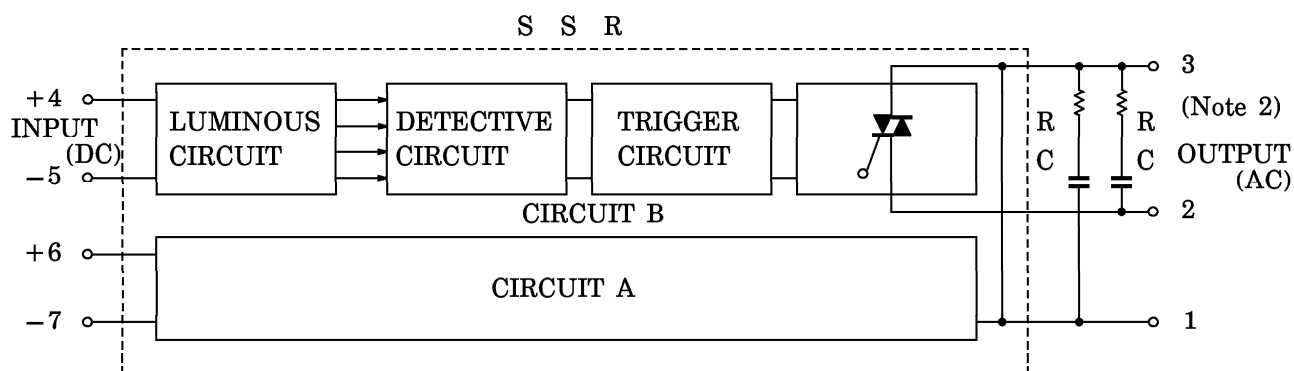


Fig. 1. SWITCHING WAVEFORM



961001EAA2'

- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

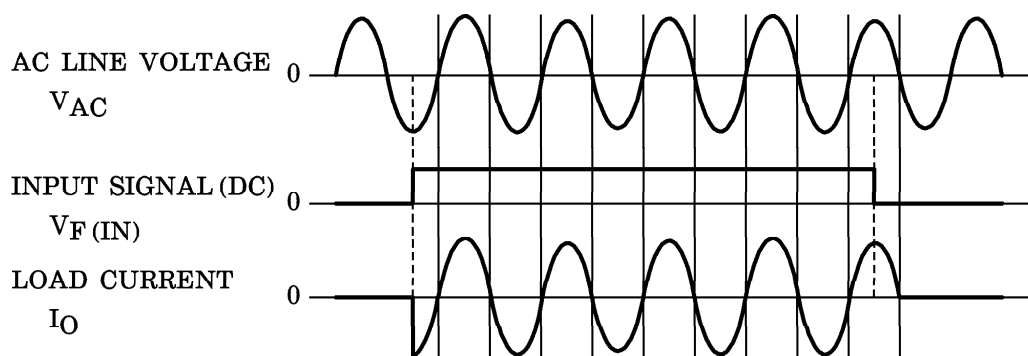