



T-41-38

New ■ Liquid Crystal Display Module (Character Display)

★ Under Development

Type	Display contents (characters × rows)	External dimensions — width × height × depth (mm)	Effective display range — width × height (mm)	Character dimensions — width × height (mm)	Drive method (Duty)	Power supply voltage (V)	Operating temperature (°C)	Storage temperature (°C)	Package
RCM-2-161-01R	16×1	80×36×12Max.	64.5×13.8	3.2 × 5.2	1/16	+5	0~+50	-20~+70	Fig. 1
RCM-2-162-01R	16×2	84×44×12Max.	61.0×15.8	2.95×4.85	1/16	+5	0~+50	-20~+70	Fig. 2
RCM-2-164-01R	16×4	87×60×12Max.	61.8×25.2	3.15×4.45	1/16	+5	0~+50	-20~+70	Fig. 3
RCM-2-202-01R	20×2	105×44×12Max.	79.8×22	2.95×4.85	1/16	+5	0~+50	-20~+70	Fig. 4
★RCM-2-162-02R	16×2	84×44×12Max.	61 × 15.8	2.95×4.85	1/16	+5	0~+50	-20~+70	Fig. 5
★RCM-2-162-03R	16×2	80×36×11Max.	64.5×13.8	2.95×3.8	1/16	+5	0~+50	-20~+70	Fig. 6
★RCM-2-202-02R	20×2	116×39Max.×13Max.	83 × 18.6	3.2 × 4.35	1/16	+5	0~+50	-20~+70	Fig. 7

Dimensions (Unit: mm)

RCM-2-161-01R

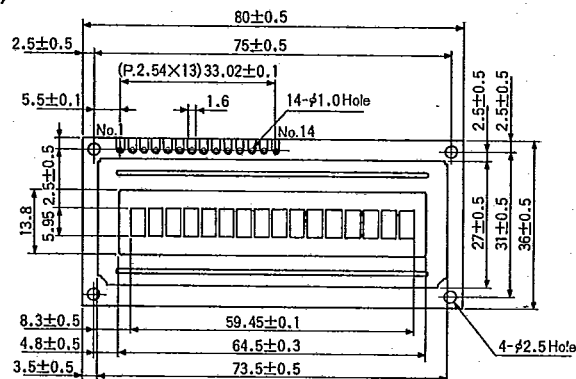


Fig. 1

RCM-2-162-01R

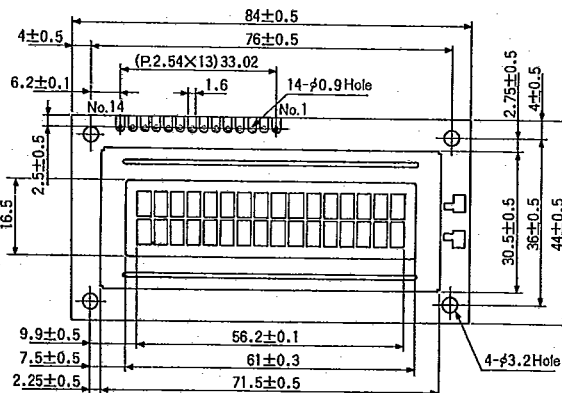


Fig. 2

RCM-2-164-01R

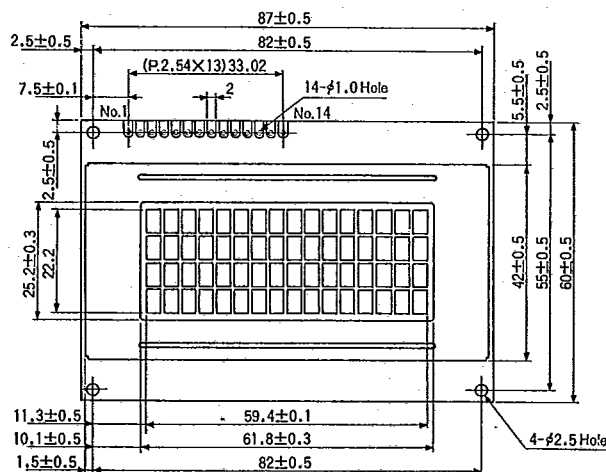


Fig. 3