

# PIN Diodes

## Reliability Data


**1N5767**  
**5082-3080**  
**5082-3188**

### Description

For applications requiring component reliability estimation, Hewlett-Packard provides reliability data for all families of devices. Data is initially compiled from reliability tests run prior to market introduction to demonstrate that a product meets design criteria. Additional tests are run periodically. The data on this sheet represents the latest review of accumulated test results.

### Applications

This information represents the capabilities of the generic device. Failure rates and MTTF values presented here are achievable with normal MIL-S-19500 TX level screening. This reliability screening is no longer available from Hewlett-Packard. The screening tests, references, conditions, lot sizes, and LTPD are provided as references only.

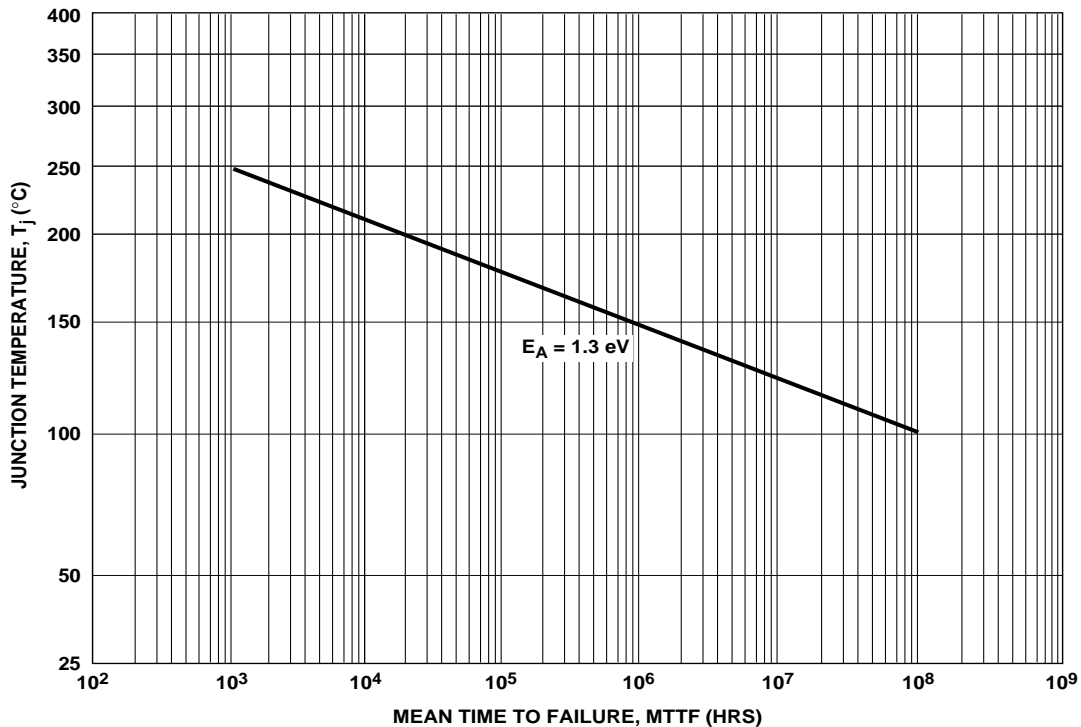

Mean Time to Failure vs. Junction Temperature

## Burn-In and Storage

Test	Test Conditions	LTPD/ 1000 Hours
High Temperature Life	1,000 hrs. min. storage time @ 150°C	3
Steady State Operating Life	1,000 hrs. min. operating time @ $P_{FM} = 250$ mW, $V_{RM} = 20$ V, $f = 60$ Hz, $T_A = 25^\circ\text{C}$	3

## Environmental

Test	MIL-STD-750	Tests Conditions	LTPD
Solderability	2026	Sn 95, Pb 5, solder at 260°C	10
Temperature Cycling	1051	100 cycles from -65°C to +150°C, 0.5 hrs. at extremes, 5 min. transfer.	7
Thermal Shock	1056	5 cycles from 0°C to +100°C, 3 sec. transfer	7
Moisture Resistance	1021	10 days, 90-98% RH, -10 to +65°C, non operating	7
Shock	2026	5 blows each $X_1$ , $Y_1$ , $Y_2$ , 1500 G. 0.5 msec pulse	7
Vibration Fatigue	2046	$32 \pm 8$ hrs., each X, Y, Z, 96 hr. total, 60 Hz, 20 G min.	7
Vibration Variable Frequency	2056	4, 4 minute cycles each X, Y, Z at 20 G min. 100 to 2000 Hz	7
Constant Acceleration	2006	1 minute each $X_1$ , $Y_1$ , $Y_2$ , at 20,000 G	7
Terminal Strength	2036	Miniature glass package, -3, 90° arcs, 2 leads, 8 oz., lead restriction	7
Salt Atmosphere	1041	35° fog for 24 hours	7

## DOD-HDBK-1686 ESD

### Classification:

IN5767      Class II  
5082-3080      Class II  
5082-3188      Class I

For technical assistance or the location of your nearest Hewlett-Packard sales office, distributor or representative call:

**Americas/Canada:** 1-800-235-0312 or 408-654-8675

**Far East/Australasia:** Call your local HP sales office.

**Japan:** (81 3) 3335-8152

**Europe:** Call your local HP sales office.

Data subject to change.  
Copyright © 1997 Hewlett-Packard Co.

Obsoletes 5965-8891E  
Printed in U.S.A.      5966-0946E (9/97)