

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM

INSULATOR :

B. FREQUENCY RANGE: DC - 6 GHz C. VSWR(RETURN LOSS): 1.25:1 MAX.

D. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS. MIN.

3. MECHANICAL:

A. DURABILITY: 500 CYCLES MIN. B. TEMPERATURE RANGE: -65° C TO 165° C


C. CRIMP FERRULE WITH . 128" HEX

4. PACKAGING:


A. QUANTITY: 100 PIECE BULK PACK

B. MARKING: BAG TO BE MARKED
"AMPHENOL, 908-NM43300, DATE CODE, AND

"NON MAGNÉTIC CONNECTORS""



**RECOMMENDED CABLE** STRIPPING DIMENSIONS

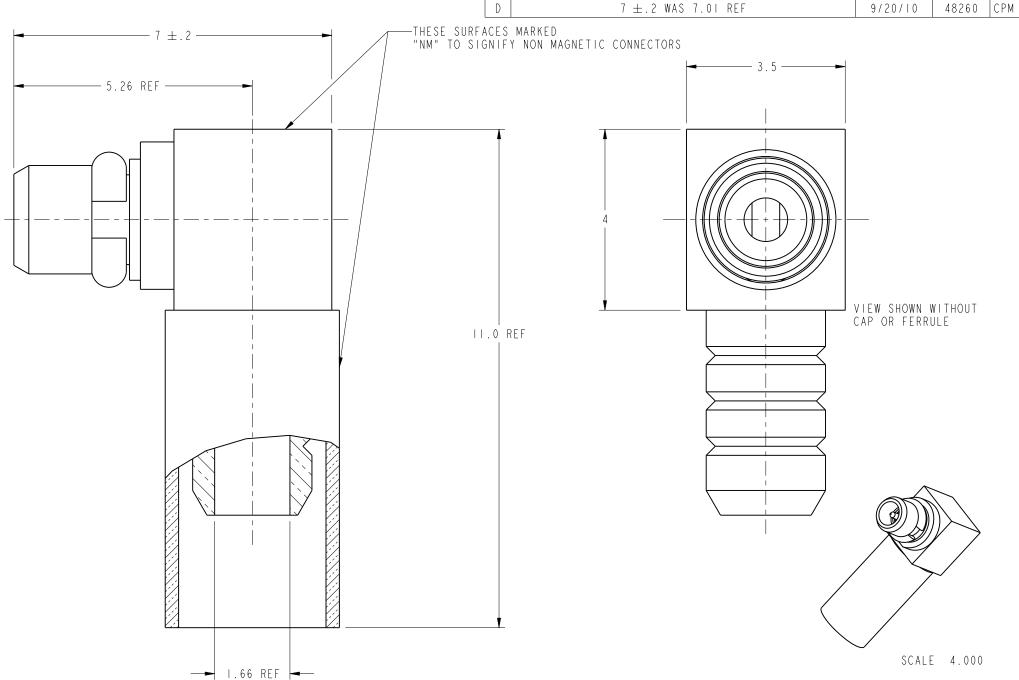

## **CUSTOMER OUTLINE DRAWING**

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

D

## **METRIC DRAWING**

I PLACE DECIMAL 2 PLACE DECIMAL ± 0.3MM (.012") ± .10 MM (.004") NOTICE - These drawings, specifications, or other data (I) are, and remain the NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol corp. (2) must be returned upon requiest; and (3) arre confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the funishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implicatioin or otherwise in any manner licensing, granting rights to permitting such holder or any other sperson to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE METRIC AND TOLERANCES ARE:

MATERIAL	DRAWN K. CAPOZZI	DATE 18 - Jul - 06
	ENGINEER K. CAPOZZI	DATE 18-Jul-06
REFERENCE EAR # 1952 AND 908-7007	APPROVED B. C. GLEISSNER	DATE 10/24/06
CONFIGURATION LEVEL: Engineering Change	CAD FILE  Root Folder/MMCX/903	8-NM43300

TITLE						
ASSEMBL	Y MMC)	(				
R/A PLU	JG TO F	RG-316				
NON MAGNETIC						
SCALE: 12.0:1.0	SHEET 2	OF 2				
DWG SIZE	CODE ID	REV				

74868

Amphenol RF Danbury CT USA, Tainan, Taiwan, Shenzhen, China www.amphenolrf.com

DRAWING NO.		
ITEM NO.		
PART NO.	908-NM43300	