



**18-36 VDC INPUT RANGE DC-DC CONVERTER HALF-BRICK POWER
MODULES 100-150 WATTS SINGLE & DUAL OUTPUT
APS100HD-24B-S&D SERIES**



FEATURES:

- SINGLE & DAUL OUTPUT
- WIDE 2:1 INPUT RANGE
- 1500VDC ISOLATION
- STANDARD HALF-BRICK PACKAGE
- HIGH-EFFICIENCY POWER MODULE
- UNDER-VOLTAGE LOCKOUT
- DESIGNED TO MEET INTERNATIONAL SAFETY STANDARDS

SPECIFICATION

<p>INPUT SPECIFICATION</p> <p>Input Range: Wide 2:1 Input DC Range 18-36Vdc. Input Voltage: Nominal 24Vdc. Input Current: Typ. 6.85A full load and 0.06A no-load @ 24Vdc nominal input. Input Fuse: Use external fuse. Inrush Current: Peak 20A @ 24Vdc. Input Filter: Pi-Network for EMI suppression. Under-Voltage Protection (UVP): Lock-out activated at 17.8 Vdc input. Input Reflected Ripple Current: 28.4mA pk-pk @24 Vdc. Isolation Voltage: 1,500Vdc input-output. Remote On/Off: TTL/CMOS-Compatible input control. Logic input reference to -Vin. Logic [1]/Open(or 2.4Vdc above -Vin)=ON. Logic [0]/Short(or 0~0.08Vdc above -Vin)=OFF.</p>	<p>OUTPUT SPECIFICATION</p> <p>Output Voltage: See Ratings Chart. Output Current: See Ratings Chart. Output Wattage: Typ. 100-150W continuous. Line Regulation: Typ. 0.1%. Load Regulation: Typ. ±1.0%. Noise & Ripple: Typ. 120mV, peak to peak. OVP: Built-in. Adjustability: Factory set. Overload Protection (OLP): Fully protected against overload and short circuit. Typical 130% max. load. Consult the factory for special OLP setting.</p>
--	--

<p>GENERAL SPECIFICATION</p> <p>Efficiency: Typ. 83.8-87%, various with input. Switching Frequency: Fixed frequency 330K Hz. Circuit Topology: Forward Circuit. Transient Response: Peak transient <220mV and recovers within 1mS after 25% load-change. Power Density: 36.0 Watts / Cubic inch.</p>	<p>Operating Temperature: -40 to +100°C (baseplate). Storage Temperature: -40 to +100 °C. Temperature Coefficient: 0.02%/°C. Humidity: Up to 95% RH, Non-Condensing. Case: Aluminum baseplate. Industrial Grade.</p>
---	---

NOTE: (1) All measurements are at nominal input, full load, and +25°C unless otherwise spec.
(2) Line Regulation measured from High to Low Lines at full load.
(3) Load Regulation measured from Full-Load (F-L) to Half-Load(H-L)at nominal input.
(4) Correct fuse size by calculating the max. DC current drain at low Line input & adding 20-25% for desired fuse size.

INPUT/OUTPUT & VOLTAGE/CURRENT RATINGS

SINGLE OUTPUT



MODEL NO.	INPUT Vdc		OUTPUT VO1 ? @ #		
	Range	Nominal	Min.	Volt.	Max.
APS100HD-24B-S018	18-36Vdc	24Vdc	0A	1.8Vdc	30A
APS100HD-24B-S025	18-36Vdc	24Vdc	0A	2.5Vdc	30A
APS100HD-24B-S033	18-36Vdc	24Vdc	0A	3.3Vdc	30A
APS100HD-24B-S050	18-36Vdc	24Vdc	0A	5.0Vdc	25A
APS100HD-24B-S120	18-36Vdc	24Vdc	0A	12.0Vdc	12A
APS100HD-24B-S150	18-36Vdc	24Vdc	0A	15.0Vdc	10A

DUAL OUTPUT

MODEL NO.	INPUT Vdc		OUTPUT VO1 ? @				AUX. OUTPUT VO2 ? @			
	Range	Nominal	Min.	Typ.	Volt.	Max.	Min.	Typ.	Volt.	Max.
APS100HD-24B-D025B	18-36Vdc	24Vdc	2.0A	18A	2.5Vdc	25A	0A	18A	1.8Vdc	25A
APS100HD-24B-D033B	18-36Vdc	24Vdc	2.0A	17A	3.3Vdc	24A	0A	18A	1.8Vdc	25A
APS100HD-24B-D033C	18-36Vdc	24Vdc	2.0A	17A	3.3Vdc	24A	0A	15A	2.5Vdc	20A
APS100HD-24B-D050C	18-36Vdc	24Vdc	2.0A	14A	5.0Vdc	20A	0A	15A	2.5Vdc	20A
APS100HD-24B-D050D	18-36Vdc	24Vdc	2.0A	14A	5.0Vdc	20A	0A	12A	3.3Vdc	18A

MECHANICAL DIMENSIONS: MM [INCHES]

WEIGHT: 73.0g (2.6 Oz.)

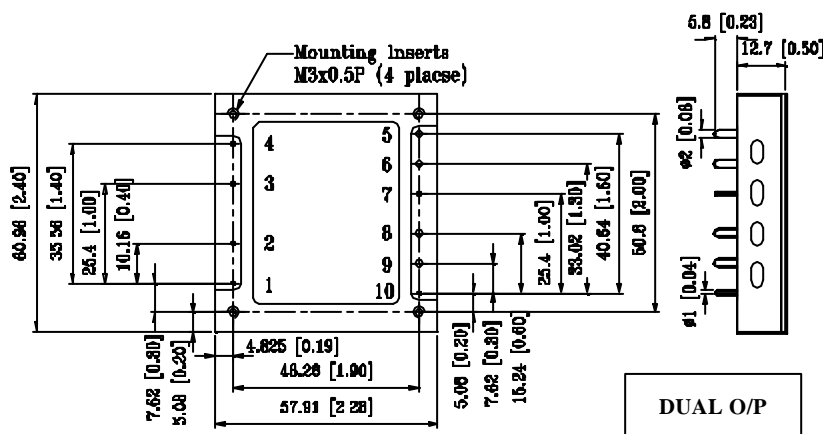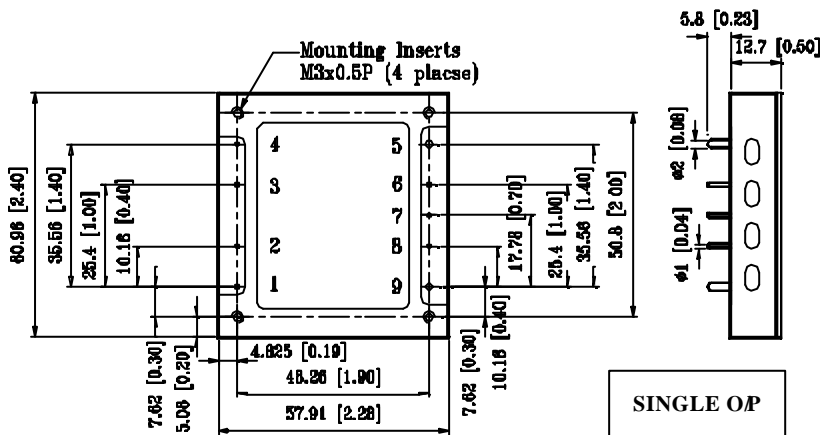

PIN ASSIGNMENT

PIN NO.	SINGLE	DUAL
PIN# 1.	+Vin	+Vin
PIN# 2.	Remote ON/OFF	Remote ON/OFF
PIN# 3.	CASE	CASE
PIN# 4.	-Vin	-Vin
PIN# 5.	DC COM.	VO2
PIN# 6.	-SENSE	DC COM
PIN# 7.	VO1 ADJ.	VO2 ADJ.
PIN# 8.	+SENSE	VO1
PIN# 9.	VO1	DC COM
PIN# 10.	-----	VO1 ADJ.